

SELECTCHEM[®] PREMIUM

Specialty
Bentonite

SELECTCHEM[®] PREMIUM is BPM's engineered high yield 200 mesh specialty bentonite. The high viscosity profile from SELECTCHEM PREMIUM makes it preferred in aqueous systems. Most customers using this clay are looking for significant rheological modification including suspension, stability, and viscosity. Even though SELECTCHEM PREMIUM was engineered for fluid systems, it still finds a home in dry blending and grouting applications.

SELECTCHEM PREMIUM is just one product in a suite of specialty bentonite offerings from BPM under the SELECTCHEM, EXPANDA[®], and VITIBEN[®] brands.

	Specification
Moisture, %	12.0 Max
Rheology (6% solution, Fann 600 rpm)	30 Min
Bulk density (compacted), lbs/ft ³	73
Specific gravity	2.7
Dry screen, % minus 200	67.5 Min

Packaging


SELECTCHEM PREMIUM is available in 50 lbs. bags and bulk bags and can ship from our Colony, WY plant.

Applications/Functions

- Suspension agent
- Binder
- Asphalt emulsions
- Sealants
- Water proofing
- Household Products
- Foundry
- Coatings

Advantages

- Highest viscosity profile in fluids
- Excellent suspension properties
- Stable, low separation

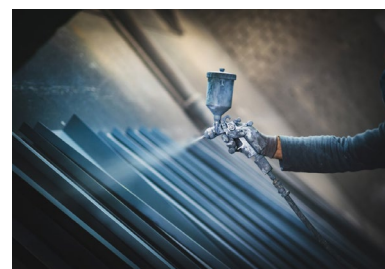

Bentonite Performance Minerals LLC

A Halliburton Company

3000 N. Sam Houston Pkwy E. Houston, TX 77032-3219

Phone: 281.871.7900

Email: BPMsales@halliburton.com

www.bentonite.com

Sales of BPM products and services will be in accord solely with the terms and conditions contained in the contract with BPM, its affiliates, and/or authorized distributors that is applicable to the sale. ©2021 Bentonite Performance Minerals LLC. All Rights Reserved. SELECTCHEM[®] is a registered trademark of Halliburton. Rev. 10/2021

