


MIRKA BELT RANGE

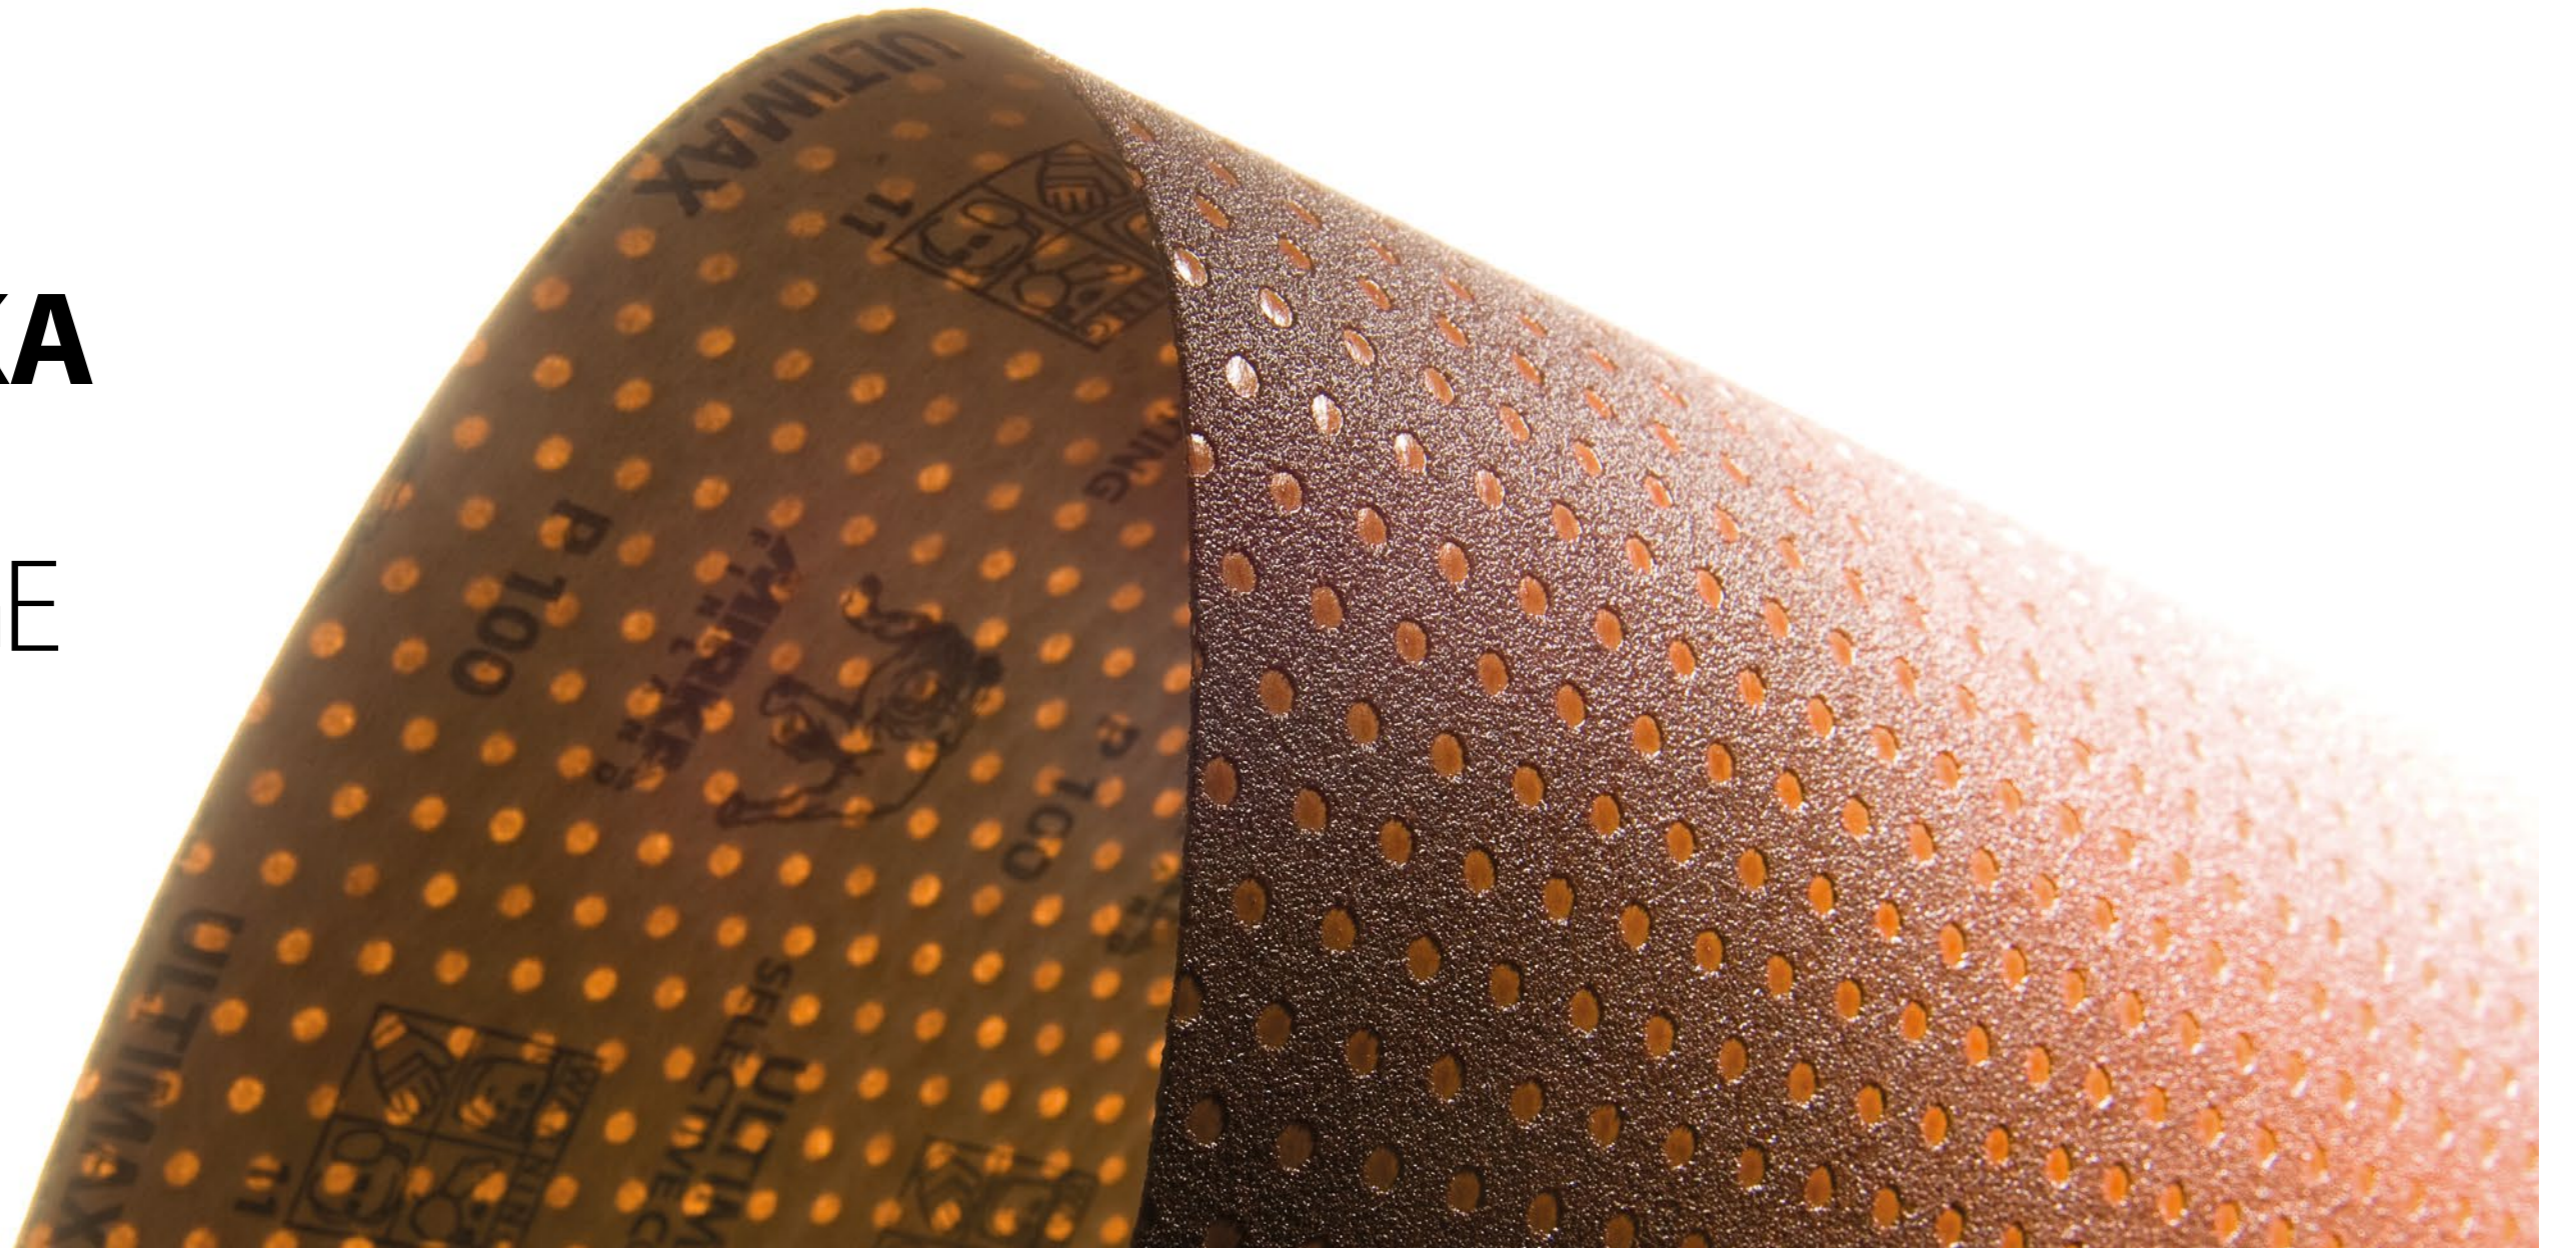

| HEAVY SANDING / CALIBRATION | SURFACE SANDING | | | | | INTERMEDIATE AND TOP COAT SANDING | | | | | | PROFILE SANDING | |
|--|--|---|--|--|---|--|--|--|--|--|--|--|---|
| | HARD WOOD (also MELAMINE) | SOFT WOOD | | SOFT AND HARD WOOD | MDF / HDF | INTERMEDIATE SANDING | | | TOP COAT SANDING (PRIOR TO POLISHING) | | | FLAT PROFILES | CONTOURED PROFILES |
| | | | | | | | | Normal coating | Very hard coating | | | | |
| Hiolit XO P36–P80 Polyester cloth backing P100–P240 X-weight cotton cloth backing Aluminium oxide Semi open | Jepuflex Antistatic P36–P400 Antistatic T- and F-paper backing Aluminium oxide / Silicon carbide Closed | Ultimax® P40–P320 Antistatic T- and F-paper backing Aluminium oxide Closed with Selective coating® technology | Avomax® Antistatic P40, P60–P240, P320 Antistatic T- and F-paper backing Aluminium oxide Open | Sica Open P80–P180 Fully antistatic F-paper backing Silicon carbide Open | Unimax® P80–P220 Fully antistatic F-paper backing Aluminium oxide Semi open | Sica Closed P80–P220 Fully antistatic F-paper backing Silicon carbide Closed | Sica Fine Stearate P240–P1500 Fully antistatic E-paper backing Stearate Silicon carbide Semi open | Gold Max P240–P800 Antistatic E-paper backing Stearate Aluminium oxide Semi open | MI231A P360–P2500 Polyester film backing Aluminium oxide Semi open Narrow belt | MI231A P360–P2500 Polyester film backing Aluminium oxide Semi open Narrow belt | MI231C P180–1200 Polyester film backing Alum. oxide with ceramic coating Semi open Narrow belt | Abranet® Max P80–P240 PA net backing Aluminium oxide Closed Narrow belt | Hiolit JCA2A0 P60–P400 J-weight cotton cloth backing Aluminium oxide Semi open Narrow belt |
| Ultimax® Black: <i>Coarse grits</i> (80–220), antistatic T-paper backing, silicon carbide, closed with selective coating / <i>Fine grits</i> (240–1000), stearate coating, antistatic E-paper backing, silicon carbide, semi-open with selective coating | | | | | | | | | | | | | |