

EZ3000 Series Chloride Analyzers

Applications

- Drinking Water
- Surface Water



Online ion-selective analysis of Chloride in water

ISE technology for optimal analytical performance

With limited maintenance requirements and reduced reagent consumption, the EZ3000 Series are the ideal choice for a wide range of water monitoring applications where ion-selective electrodes are the preferred analytical technique. Outstanding precision and stability is guaranteed by the temperature-controlled measurement.

Direct, discontinuous ISE method

Contrary to separate electrodes or other analyzers in the market, the EZ3000 Series does not run a continuous measurement. The principle of discontinuous ISE analysis not only enhances control over conversion of ion activity to electric potential, it also eliminates risk of cross-contamination between cycles and reduces overall consumption of reagents.

The EZ3000 Series combine unique technology with a set of analysis, control and communication features in an industrial analyzer mainframe with designed for the highest performance:

- Automatic direct ion-selective measurements
- Smart automatic features
- Control and communication via industrial panel PC
- Standard 4 - 20 mA signal output with alarm processing
- Communication ports supporting connectivity to Modbus
- Multiple stream analysis
- Reduced reagent consumption


With the EZ3003, EZ3004 and EZ3005 a selection of measuring ranges is available to match your application needs.

Technical Data*

Model	EZ3003	EZ3004	EZ3005
Parameter	Chloride	Chloride	Chloride
Range	1 - 10 mg/L Cl ⁻ Optional: 0.5 - 5 mg/L Cl ⁻	10 - 100 mg/L Cl ⁻ Optional: 2.5 - 25 mg/L Cl ⁻ 5 - 50 mg/L Cl ⁻	100 - 1,000 mg/L Cl ⁻ Optional: 25 - 250 mg/L Cl ⁻ 50 - 500 mg/L Cl ⁻
Lower Limit of Detection (LOD)	≤ 0.5 mg/L	≤ 2.5 mg/L	≤ 25 mg/L
Precision	Better than 2% full scale range for standard test solutions		
Measurement Method	Discontinuous, direct measurement by combined ion-selective electrode, conform with standard methods EPA 9212 and ASTM D512-12		
Interferences	Bromide, sulfide, iodide, cyanide ions may interfere. Mercury must be absent. Ammonia and thiosulphate may interfere. Fats, oil, proteins, surfactants and tar.		
Cycle Time	5 minutes		
Automatic cleaning	Yes		
Calibration	Automatic, 2-point; frequency freely programmable		
Validation	Automatic; frequency freely programmable		
Ambient Temperature	10 - 30 °C ± 4 °C deviation (50 - 86 °F ± 7.2 °F deviation) at 5 - 95% relative humidity (non-condensing)		
Reagent Requirements	Keep between 10 - 30 °C (50 - 86 °F)		
Sample Pressure	By external overflow vessel		
Sample Flow Rate	100 - 300 mL/min		
Sample Temperature	10 - 30 °C (50 - 86 °F)		
Sample Quality	Maximum particle size 100 µm, < 0.1 g/L; Turbidity < 50 NTU		
Power	100 - 240 VAC, 50/60 Hz Max. power consumption: 120 VA		
Instrument Air	Dry and oil free according to ISA-S7.0.01-1996 quality standard for instrument air		
Demineralized Water	For rinsing		
Drain	Atmospheric pressure, vented, min. Ø 64 mm		
Earth Connection	Dry and clean earth pole with low impedance (< 1 Ohm) using an earth cable of > 2.5 mm ²		
Analog Outputs	Active 4 - 20 mA max. 500 Ohm load, standard 1, max. 8 (option)		
Digital Outputs	Optional: RS232, Modbus (TCP/IP, RS485)		
Alarm	1x malfunctioning, 4x user-configurable, max. 24 VDC/0.5 A, potential free contacts		
Protection Class	Analyzer cabinet: IP55 / Panel PC: IP65		
Material	Hinged part: Thermoform ABS, door: plexiglass Wall section: Galvanized steel, powder coated		
Dimensions (H x W x D)	690 mm x 465 mm x 330 mm		
Weight	25 kg (55 lbs.)		
Certifications	CE compliant / UL certified		

*Subject to change without notice.

Dimensions

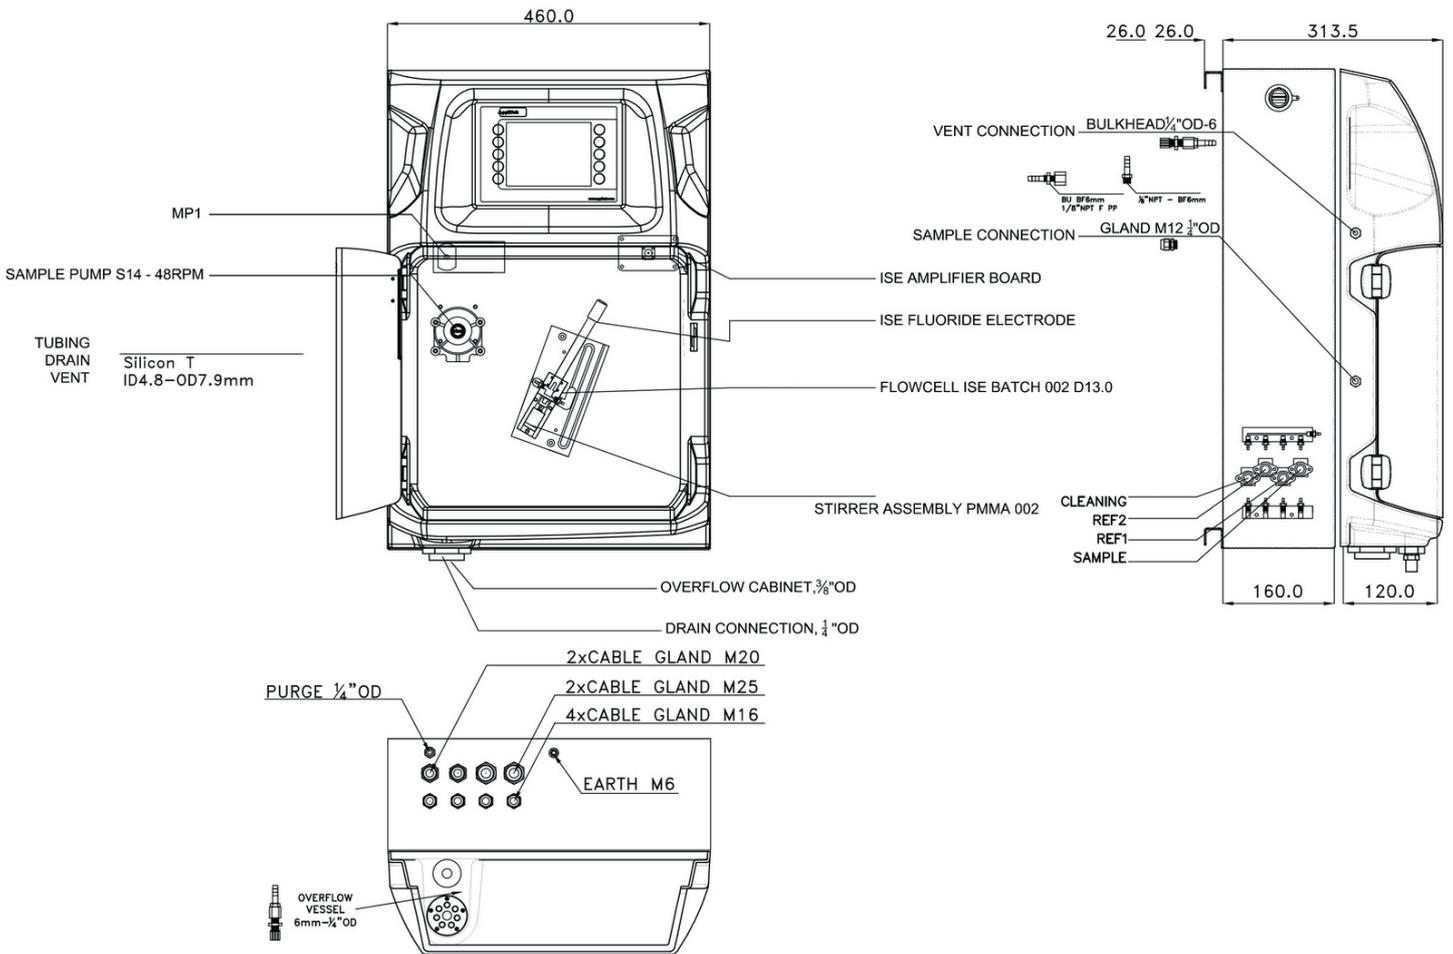

Hach Service

With Hach Service, you have a global partner who understands your needs and cares about delivering timely, high-quality service you can trust. Our Service Team brings unique expertise to help you maximize instrument uptime, ensure data integrity, maintain operational stability, and reduce compliance risk.

Order Information - Part Number Configurator

Standard range, 1-10 mg/L Cl ⁻	EZ3003.99						
Standard range, 10-100 mg/L Cl ⁻	EZ3004.99	X	X	X	X	X	2
Standard range, 100-1,000 mg/L Cl ⁻	EZ3005.99						
Measurement range settings / Dilution options							
25% of standard range (only EZ3004 + EZ3005)		B					
50% of standard range		C					
Standard range		0					
Power supply							
Standard 100 - 240 VAC, 50/60 Hz			0				
Number of sample streams							
1 stream				1			
2 streams				2			
3 streams				3			
4 streams				4			
5 streams				5			
6 streams				6			
7 streams				7			
8 streams				8			
Outputs							
1x mA					1		
2x mA					2		
3x mA					3		
4x mA					4		
5x mA					5		
6x mA					6		
7x mA					7		
8x mA					8		
RS232					A		
Modbus TCP/IP					B		
Modbus RS485					C		
1x mA + Modbus RS485					E		
2x mA + Modbus RS485					F		
3x mA + Modbus RS485					G		
4x mA + Modbus RS485					H		
1x mA + Modbus TCP/IP					I		
2x mA + Modbus TCP/IP					J		
3x mA + Modbus TCP/IP					K		
4x mA + Modbus TCP/IP					L		
No adaption, standard version							0