


CASE STUDY: BG DIESEL FUEL SYSTEM PERFORMANCE RESTORATION FOR LIGHT DUTY

PRODUCT BG Diesel Fuel System Performance Restoration, PN PD15




VEHICLE: 2017 BMW 3-Series 328d 37,000 miles (59,545 km)

RESULTS FROM PD15



[Conducted by BG Proving Ground. 04/30/2020]




Combustion Chamber A



. - .



Piston Top A





AFTER

BEFORE


Continued on next page

© copyright 2021 BG Products, Inc. • Wichita, Kansas 67213 • The information contained herein based on BG Products, Inc. best professional judgment. The information intended for the use of the individual or entity named on the report. Any dissemination to third parties is unauthorized. If you have received this information in error, please notify us immediately by telephone (1-888-570-0842) and we will arrange for the return of the original paperwork to our office. Disclosure, copying, distribution or use of the contents strictly prohibited.

Continued

RESULTS FROM PD15

[Conducted by BG Proving Ground. 04/30/2020]

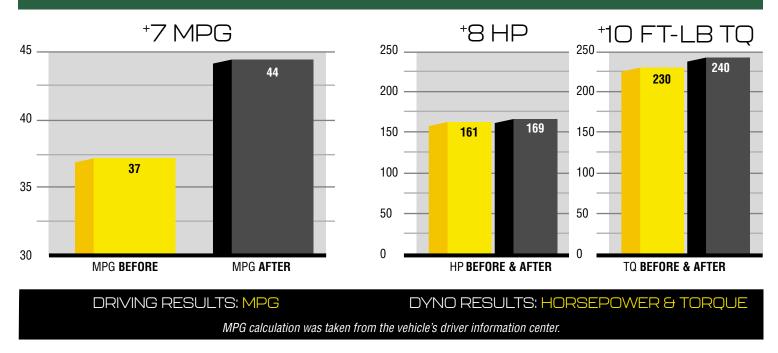

SERVICE RECOMMENDATION

We recommend pairing **BG Diesel Fuel System Performance Restoration**, **PN PD15**, with **BG EPR® Engine Performance Restoration®**, **PN 109**, for a complete engine and fuel system cleaning, including the removal of internal diesel injector deposits. When used as part of an oil change, this service will keep injectors and combustion chambers clean and reduce carbon packing of piston rings, thus restoring horsepower, torque, and fuel efficiency.



BG Diesel Fuel System Performance Restoration Service

- Add BG Diesel Fuel System Performance Restoration, PN PD15, to the fuel tank. Treat ratio: 11 oz. (325 mL) treats up to 20 gallons (75 Liters) of diesel fuel.
- Add BG EPR[®] Engine Performance Restoration[®], PN 109, to the crankcase. Treat ratio: 11 oz. (325 mL) treats 4–6 quarts/Liters of engine oil.
- With vehicle safely in park and exhaust ventilation applied to vehicle's exhaust system, start the vehicle. Apply BG throttle depressor to elevate idle to 1,200 RPM for a minimum of 20 minutes.
- Turn off vehicle and perform an oil change while the engine and oil are still warm, replacing all
 engine oil filters. Fill the fuel tank(s) completely full with fuel. BG Diesel Fuel System Performance Restoration
 will be performing the fuel system service throughout the entire tank of treated fuel.

© copyright 2021 BG Products, Inc. • Wichita, Kansas 67213 • The information contained herein based on BG Products, Inc. best professional judgment. The information intended for the use of the individual or entity named on the report. Any dissemination to third parties is unauthorized. If you have received this information in error, please notify us immediately by telephone (1-888-570-0842) and we will arrange for the return of the original paperwork to our office. Disclosure, copying, distribution or use of the contents strictly prohibited. R01