


# OWNER'S MANUAL





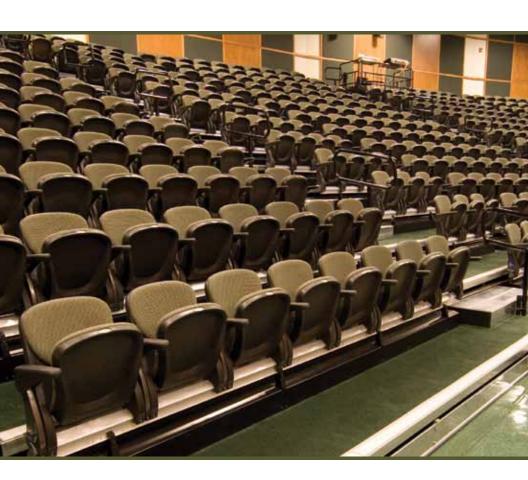

Congratulations on your new Hussey Metro Seating System purchase.

Metro sets a new aesthetic standard for upholstered seating, combining distinctive style with comfort, durability and value.

Please take the appropriate time to read and understand this manual to make the most of your Metro purchase.

It will not only help you understand the features and benefits your new product has to offer, but it will also help you gain an understanding of the product's preventive maintenance requirements, which will help extend the product life.

Congratulations and thank you,

Hussey Seating Company Metro Product Manager Ron Bilodeau

#### INTRODUCTION

The following manual provides information for general maintenance and operation of the Metro system. Contact your local dealer or Hussey Seating Company Customer Service for more detailed information or if you have any additional questions.

#### **TABLE OF CONTENTS**

1-1 Polymer

1-2 Fabric

1-3 Paint-Metal

1-4 Lubrication

#### Section 2 Maintenance & Operation of Components

2-1 Anchors - Fixed-Footing Metro

2-2 Chair Modules

2-3 Armrest Assembly

2-4 Armrest Replacement

2-5 Fold-down Mechanism

2-6 Easy Access Armrests

Section 3 Warranty





### 1-1 Polymer

Section 1: Product Cleaning

Use a soft damp cloth with mild (non-bleach) detergent. Rinse with warm water and wipe clean with a soft, dry, clean cloth.



#### 1-2 Fabric

Clean 100% nylon fabrics with standard upholstery fabric cleaners as specified for use on nylon, leather, or olefin fabrics. Follow fabric manufacturers recommendations for cleaning. Hussey Seating Company uses "Texize K2R Spot Remover". Use in a hidden area to determine the effects for your type of fabric as specified by the manufacturer.



#### 1-3 Paint - Metal

Clean with mild soap and water. Wipe area dry with towel to prevent rusting. When fixing scratches or nicks in the paint contact your local Hussey representative for paint and touch-up process.



#### 1-4 Lubrication

All chairs, tablet arms, etc., have been pre-lubricated at the factory and should not require any further lubrication for the life expectancy of the product



#### Section 2: Maintenance & Operation of Components

Note: Since it is possible that chair parts may loosen with time and heavy usage, Hussey Seating Company recommends that the following components be checked every six months:

#### **Inspection Areas**



#### 2-1 Anchors - Fixed-Footing Metro

Make sure connection bolts between the foot and floor or riser surfaces are tight. Also verify if the hardware, which connects the foot to the beam is tight. Replace any broken or missing hardware




#### 2-2 Chair Modules

Inspect attachment hardware and verify they are not loose. Try to move the chair module side to side and front to back. If hardware is loose, tighten and replace any missing or damaged hardware.













#### 2-3 Armrest Assembly

Inspect attachment hardware and verify they are not loose. Try to move the armrest side to side and front to back. If hardware is loose, tighten and replace any missing or damaged hardware.

#### 2-4 Armrest Replacement

- A. Check to see if armrest is secure by trying to slide armrest forward. If armrest is damaged, remove small screw (located underneath) in the middle of the armrest. This will allow the entire armrest to slide forward so that it can be removed from the stanchion.
- **B.** If replacing entire armrest, slide the new armrest on to the armrest bracket and re-attach the screw located underneath the armrest.
- **C**. If replacing the top "Arm Cap" portion, repeat step A and remove the (2) remaining armrest cap screws located underneath at the rear and forward portion of the armrest. Replace with new cap and fasten with (2) previously removed screws. Then re-attach armrest to the stanchion as described in step B. Replace any missing or damaged hardware.












#### 2-5 Fold-down Mechanism

A. Inspect the connection between the beam and the folddown mechanism and verify the hardware is not loose or missing (see picture below). Tighten any loose hardware and replace any missing hardware.

- B. Operate the mechanism by unlocking the row from its upright "use" position and laying the row onto the deck to its "stored" position. Then lift the row into the initial position, cycling this procedure a couple of times. Make sure the mechanism operates freely and is not bound up with debris. Clean out any debris from the mechanism area.
- C. Review the amount of motion, front to back, of the chair modules in the "use" position. Setting the adjustment screw on the mechanism can eliminate a majority of the movement.

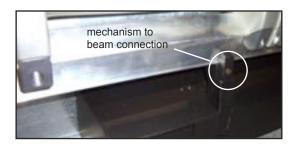

#### 2-6 Easy Access Arm

- **A.** The Metro armrest designated for Easy Access is pinned at the rear and can be raised to a vertical position. Metro has a unique design that allows every stanchion to become an Easy Access armrest if required. These armrests allow for enhanced access for disabled patrons. This can be accomplished at any time by simply removing the pin which hinges the armrest in the fixed down position. Please see Metro Assembly Instructions for further information.
- **B.** Rotate armrest up and down repeatedly. If arm sticks, remove armrest and inspect rotation pin. Clean area around pin and remove any dirt that may be present. This part requires no additional lubrication.



## **Hussey Metro Seating Collection**

Five-Year Product Warranty



Hussey Seating Company, hereafter referred to as HSC, warrants the products described on the attached schedule against defects due to faulty design, material or workmanship on HSC's part for a period of 5 years from the date of completion, provided that the products furnished and installed in the designated project, are continuously used and maintained in accordance with HSC published instructions on maintenance and periodic inspection, and installation is completed by HSC approved installers. Completion date is determined as the date of official hand over and will be confirmed in writing by HSC at the time the Official Warranty is issued.



Normal wear and tear, abuse, vandalism, alterations of products, acts of God, casualty loss or other matters beyond HSC control will not be construed as fault in design, material or workmanship. "This Warranty only applies to products sold by Hussey that are: manufactured and or supplied by HSC. The manufacturer's warranty shall apply for all other items included in, or components of, HSC products (including fabrics)."



This warranty may not be altered except in writing by an officer of HSC. HSC obligations are limited to repair and/or replacement of any HSC product found to be defective due to faulty design, material or workmanship.



THIS WARRANTY IS AN EXCLUSIVE WARRANTY AND ALL OTHER WARRANTIES, IMPLIED OR OTHERWISE, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE HEREBY DISCLAIMED.

HSC shall not be liable (in contract, tort or otherwise) for any special, indirect, incidental, punitive or consequential damages of any kind. In any event, no claim of any kind shall be greater than, nor shall HSC in any event be liable for, an amount in excess of the purchase price of the HSC product about which any such claim has been made.

Timothy B. Hussey, President Chief Executive Officer







# Hussey Seating Company<sup>™</sup>

Hussey. Your partner for seating solutions.





YOUR PARTNER FOR SEATING SOLUTIONS

38 Dyer Street Extension
North Berwick, Maine 03906 USA
Toll Free (USA) 1.800.341.0401
Tel: +1.207.676.2271 • Fax: +1.207.676.2222
info@husseyseating.com • www.husseyseating.com