

WX BREACH 2.5

TACTICAL SERIES

WILEY X



1 PURPOSE-BUILT DURABLE FRAME DESIGN

Every line of the bold, aggressive frame is engineered for strength and function delivering uncompromising protection and performance in the most demanding conditions

2 REMOVABLE FACIAL CAVITY™ SEAL AND A DYNAMIC VENTILATION SYSTEM

While the Removable Facial Cavity Seal shields from wind, dust, and airborne debris, the Dynamic Ventilation System allows controlled airflow behind the lenses, preventing heat and moisture buildup that can cause fogging. Together, they ensure your eyes stay protected without compromising visibility, even in the toughest conditions

3 RUBBER TEMPLE TIPS AND NOSEPIECE WITH HYDROPHILIC PROPERTIES

Ensures a secure, no slip fit that gets even better with sweat or moisture ideal for active or high intensity use

4 EXTRA THICK 2.5MM SHATTERPROOF LENSES

Lenses meet military grade standards for impact protection. They're tough enough to shrug off flying debris, resist scratches, and block 100% of harmful UV rays, delivering crystal clear vision in the harshest conditions, whether you're on the job, in the field, or off the grid

FALL 2025 LAUNCH

The WX Breach 2.5 is engineered for tactical environments where failure isn't an option. High wrap frames deliver full coverage against impact, wind, and debris, while a removable gasket and Dynamic Ventilation System help prevent fogging in the heat of the moment. Rubberized temples and nose pads lock in a secure, comfortable fit. Available in Regular and XL sizes with interchangeable lenses for adaptable performance.



CHBRC01

F Matte Black

L CAPTIVATE™ Smoke Grey / Clear

VO

NP



CHBRC02

F Matte Black

L Smoke Grey

VO

NP



CHBRC03

F Matte Black

L Clear

VO

NP



CHBRC08

F Matte Black

L Smoke Grey / Clear / Light Rust

VO

NP

F Frame Color L Lens Color

VO .15 Ballistic Impact Testing Standard


NP Non Polarized

SPECIFICATIONS

WX BREACH 2.5



FIT

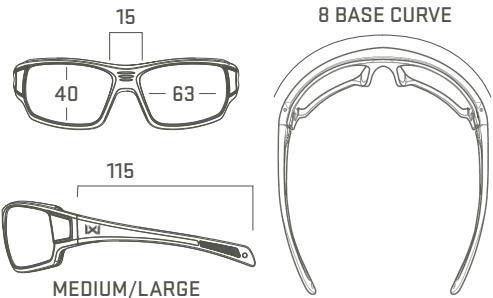

FEATURES

- Rx Ready
- ANSI Z87.1+ Impact Protection/Optical Standards
- VO Ballistic Testing Standard
- 8-Base Lenses, High-Wrap Frames
- UVA/UVB Light Blocking
- Super-Tough Triloid Nylon Frame
- Dual-Injected rubber nose pads and temple tips
- Interchangeable Lenses
- Assembled in America


ADDITIONAL ACCESSORIES

- Black Zippered Case (DN800L)
- Microfiber Bag (DN900)
- Black Zippered Case (DN600)
- 2 and 3 Lens Packs



ANSI HIGH-MASS IMPACT TEST

Wiley X ANSI Z87.1 frames and lenses must withstand the impact of a 11 lb projectile dropped from a height of 50 to ensure your eyes are protected from unexpected blunt force impacts



ANSI HIGH-VELOCITY IMPACT TEST

Wiley X ANSI Z87.1 frames and lenses must withstand the impact of a 25 diameter steel ball For spectacles, the projectile must be traveling 150-160 fps and for goggles, the projectile must be traveling 250-260 fps



VO BALLISTIC TESTING

WX Breach 2.5 styles meet U.S. military standards for ballistic eye protection For spectacles the projectile must be traveling 700-725 fps



DYNAMIC VENTILATION

Our Dynamic Ventilation system works with the Removable Facial Cavity seal, allowing you to control airflow and reduce fogging Side vents open to allow air to flow in and behind the lenses to clear condensation Close the side vents to stop airflow



REMOVABLE FACIAL CAVITY™ SEALS

Fine dust and pollen, as well as wind, can cause long term eye irritation, such as Dry Eye Syndrome Peripheral light can also diminish optical clarity Wiley X's removable soft foam Facial Cavity Seals block out even the finest irritants and peripheral light, protecting the eyes and allowing polarized lenses to perform at peak levels

PRESCRIPTION SPECIFICATIONS

WX BREACH	Power Range	Single Vision Minimum PD	Progressive Minimum PD	Add Power Range
DIGIFORCE 2™	-7.00 to +5.00	56	58	0.75 to 3.50
STANDARD	-4.00 to +4.00	56	58	0.75 to 3.50



SCAN QR CODE TO SEE IN ACTION