



2

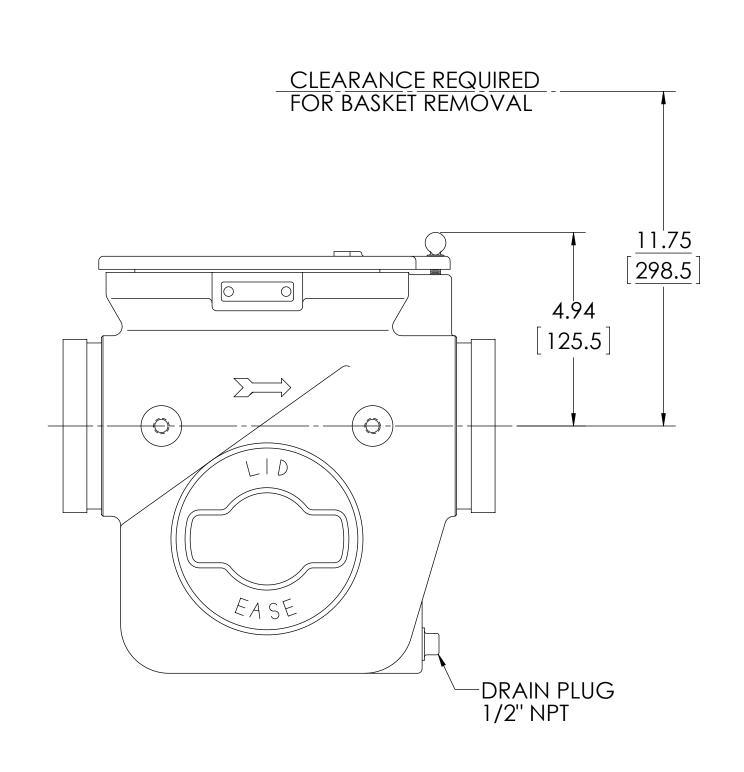

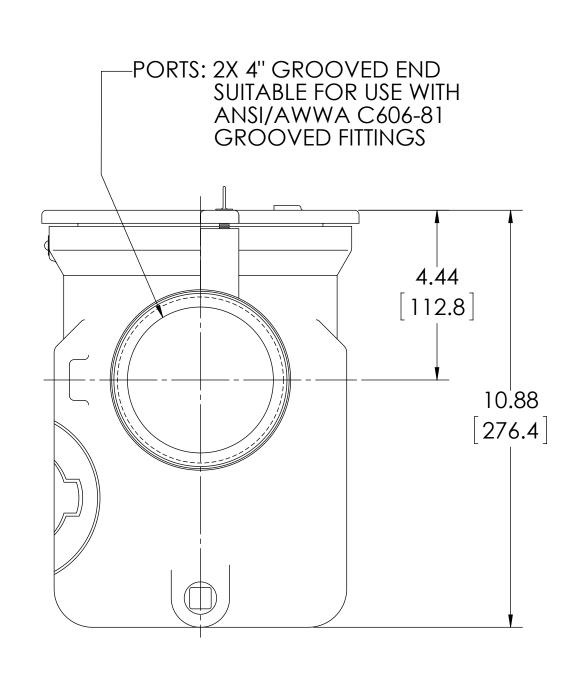

NOTES:

1. REFER TO VIKING CATALOG SECTION 640 FOR -XXX MODEL NUMBER CLARIFICATION.

| | MESH | 10 | 20 | 40 | 60 | 80 | 100 | USE AND RELATED INFORMATION | |
|---|----------------------|------|------|------|-------|------|-------|-----------------------------|---|
| A | OPENING (INCHES) | .075 | .034 | .015 | .0092 | .007 | .0055 | | |
| | OPENING (MICRONS) | 1910 | 860 | 380 | 230 | 190 | 140 | MATERIAL: WAS: | _ |
| | 0 | | l | 7 | | 1 | , | | |

----- UNLESS OTHERWISE SPECIFIED -----DIMENSIONS ARE IN **INCHES.**INTERPRET DIM AND TOLERANCES PER VIKING PUMP ES-47
BREAK EDGES .005-.015 RADIUS OR CHAMFER
.XX ±.02 .XXX ±.005 ANGLES ±5°

ALL FINISHED SURFACES (AA .030 CUTOFF)

ACCEPTABILITY OF SCREW THREADS SHALL BE DETERMINED BASED ON SYSTEM 21 ASME B1.3

| | STATE | Relec | ased | 07/26/2013 |
|----|------------|-------|------|----------------|
| 47 | DRAWN | rmenn | enga | 7/6/2011 |
| | CHECKED | BAM | | 07/25/2013 |
| | PROJECT | | 2D | WEIGHT: LBS |
| | SCALE: 2:5 | | | |

| 3 | VIKING PUMP, INC. A Unit of IDEX Corporation Cedar Falls, IA 50613 U.S.A. | THIS DRAWING IS THE PROPERTY OF VIKING PUMP, INC. AND IS PROPRIETARY IN GENERAL AND DETAIL. IT SHALL NOT BE COPIED OR ITS CONTENTS REVEALED TO OUTSIDE PARTIES WITHOUT THE WRITTEN CONSENT OF VIKING PUMP, INC. |
|---|--|---|
| 3 | STRAINER ASSEMBLY, 4" GROOV F-1040-GSST-XXX, F-1040-GALM-X | |
| | A.2 | |



| SI7F | DWG. NO. | SHFFT 1 OF 1 |
|-------|-------------|--------------|
| U.L.L | | OTTLET TOT T |
| | | \wedge |
| | ⊢_ I () /I | ()_(_ |
| | F-104 | ・しょくフ |
| _ | | • |

THIRD ANGLE PROJECTION

CASTING NUMBER

3

A.2