

VIEW A-A


PORTS: 2X 2" FLANGES

DRILLED AND TAPPED SUITABLE FOR USE WITH

CLASS 125 ANSI FLANGES (124A, 1124A, 4124A, 4124B, 4624B)

CLASS 150 ANSI FLANGES

18.12 **−** 1.25 2.25 1.75 \bigcirc 0 **(1)**

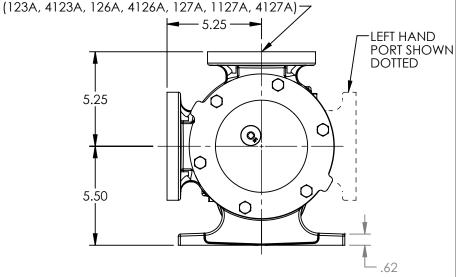

STANDARD MODELS:

K123A, K4123A, KK123A, KK4123A, K126A, K4126A, KK126A, KK4126A,

K127A, K1127A, K4127A, KK127A, KK1127A, KK4127A

MODELS WITH OPTIONAL FLANGED PORTS:

K124A, K1124A, K4124A, K4124B, KK124A, KK1124A, KK4124A, KK4124B, K4624B, KK4624B

NOTES:

1. ALL DIMENSIONS ARE FOR REFERENCE ONLY.

DIMENSIONS ARE IN STATE Released 11/12/2019 **INCHES** DRAWN sjakel 05/02/2019 PROJECT: CHECKED AA 11/12/2019 WAS:

VIKING PUMP, INC. A Unit of IDEX Corpor Cedar Falls, IA 50613 THIS DRAWING IS THE PROPERTY OF VIKING PUMP, INC. AND IS PROPRIETARY IN GENERAL AND DETAIL. IT SHALL NOT BE COPIED OR ITS CONTENTS REVEALED TO OUTSIDE PARTIES WITHOUT THE WRITTEN CONSENT OF VIKING PUMP, INC.

DWG. NO. KV-2114 SHEET 1 OF 1

REV. D.2

11/12/2019