


Technical data sheet

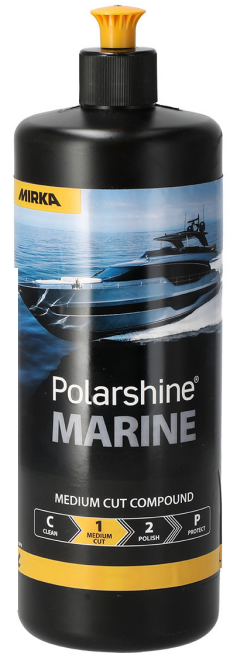


Product information

Water borne, silicone-free polishing compound designed to quickly remove oxidation and sanding scratches from grit 1000 and finer, leaving a high-gloss finish.

Product advantages

- Removes scratches from grit 1000 and finer quickly and permanently
- Removes heavy oxidation
- Water borne and silicon-free

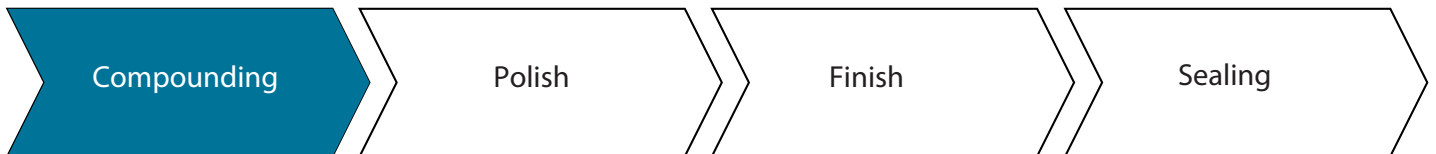

Surfaces

- Gelcoat
- Ceramic clear coats
- Old paint
- Wood high gloss coatings
- Top coats
- Clear coats

Polishing machine

- Rotating 800 – 2000 rpm

Polishing pad

- Twisted lambswool
- Lambswool

Product properties

Speed: 

Polish, gloss: 

Work instruction

1. Shake or stir polishing compound before use.
2. Do not use too much compound at a time. Use a small amount which is consumed on a focused area - less messing and clean up!
3. Clean thoroughly before and after polishing.
4. Work focused on an area of 40x40 cm at a time.
5. Polish until a scratch free surface is achieved.
6. Wipe the surface with a microfiber cloth after application.
7. Keep the pad clean, a dirty pad causes deep swirls and scratches.

Technical specifications

Density: 1,45 kg/l
 Viscosity: 20,5 Pas
 Colour: White

Storage recommendations

Recommended storage temperature:
 5° - 35° C / 41° - 95° F
 Keep from freezing