

Acoustic Ceiling Tile

Urban

Never cut corners

The Urban system never cuts acoustic corners. Its simple square forms are layered for dimensionality and depth, forming a bustling, urban atmosphere that belies the silence they bring.



Image by Blaque

How To Specify

Key Information

Urban is a modular ceiling tile system with multiple depths. Consider these questions as you design your layout. If shop drawings are required for your project, please follow steps 1 - 7.


Fast Track

If you're looking to expedite your project, this product is available as Turf Fast Track! Using Fast Track, our standard lead time for shop drawings is eliminated allowing the project to move directly into production.

Fast Track Notes


Installation and seaming drawings are not included in this process. Turf recommends 10-15% additional tiles to cover overage / attic stock.

1

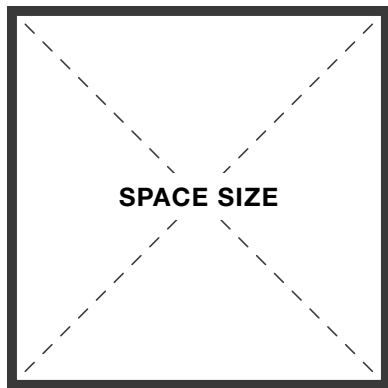

What are the dimensions of the space?


2

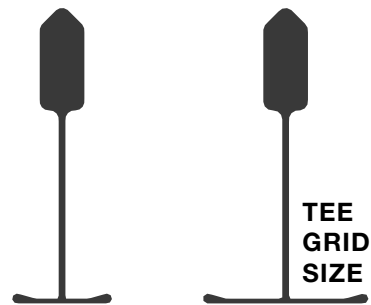

What is the size of the tee grid?

PAGE 3


3

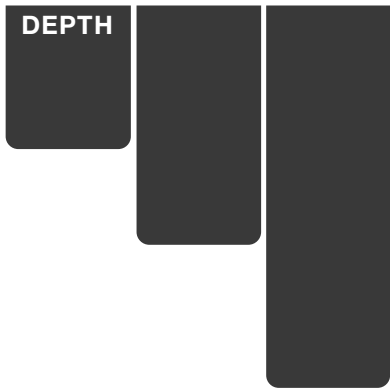

Do you need specific depths?

PAGE 4


4

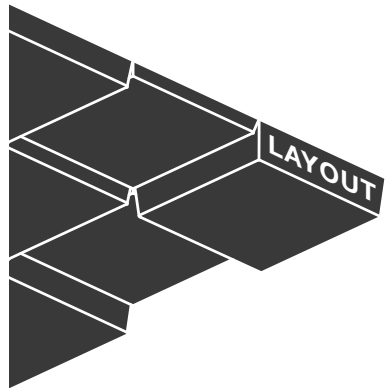

What is the proposed layout?

PAGE 5


5

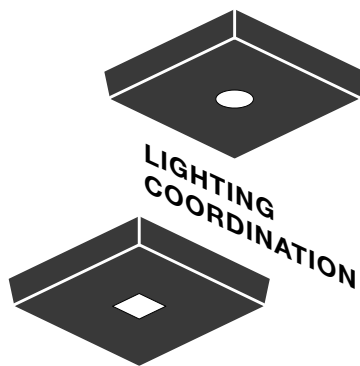

Does the project need tiles for lighting coordination?

PAGE 9


6

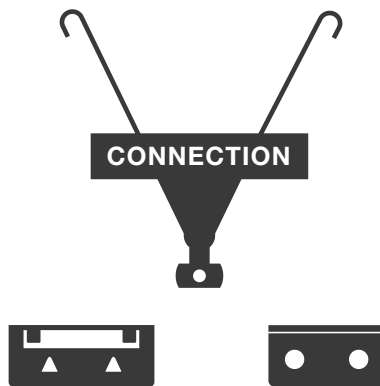

How will the tiles mount to the ceiling?

PAGE 6

7

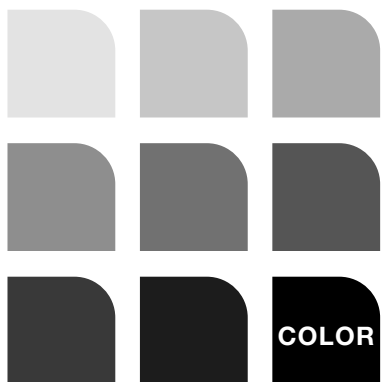

What is the color?

PAGE 12



1. Are you using 9/16" or 15/16" tee grid?
2. Which Urban tile types do you need?
See "Tile Types" & "Lighting Coordination" pages for details.
3. Are you using Magnetic Clip, Grid Clip or Torsion Spring connection?
4. What is the color of the tiles?
5. How many tiles do you need?
6. Do you need additional infill tiles?
7. Do you want to include any additional product for overage or attic stock?

Dimensions


Standard Size	24" L x 24" W
Standard Depths	2"D, 4"D, 6"D
	See Tile Types page for more details.

Connection Options

9/16" or 15/16" Flat Tee Grid	Magnetic Clips Grid Clips Torsion Spring
	See Connections page for more details.

Color

5mm Palette	Urban Tiles can be specified in any of our 5mm felt colors.
Tee Grid Color	Turf recommends coordinating the tee grid color with our 5mm tile color to account for flexibility in the material. For example, using black tee grid with M07 Onyx.

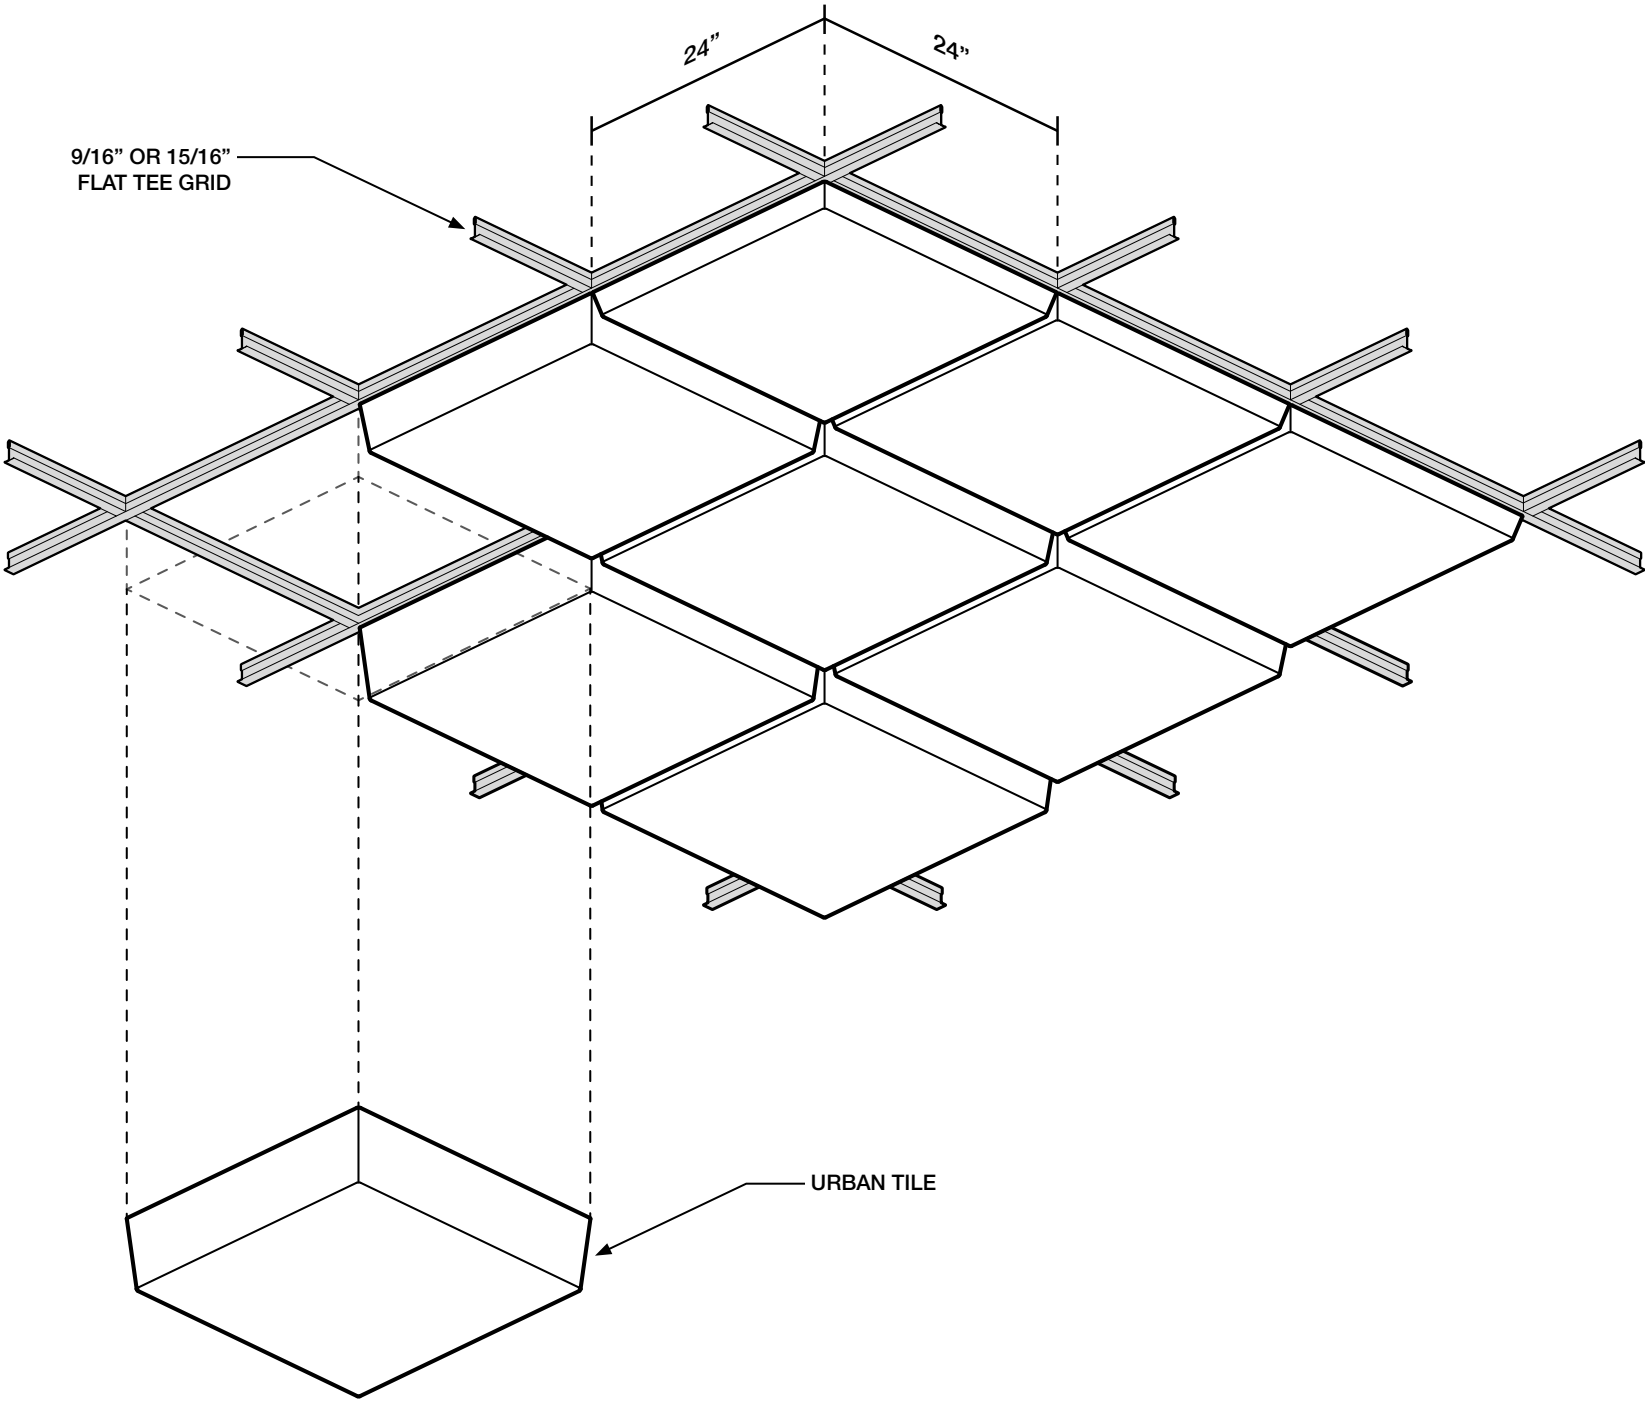


ALL DIMENSIONS NOMINAL UNLESS NOTED OTHERWISE



Tile Types

Design

Urban Tiles come in three standard depths. Choose one profile or coordinate with multiple to create a dynamic ceiling system.

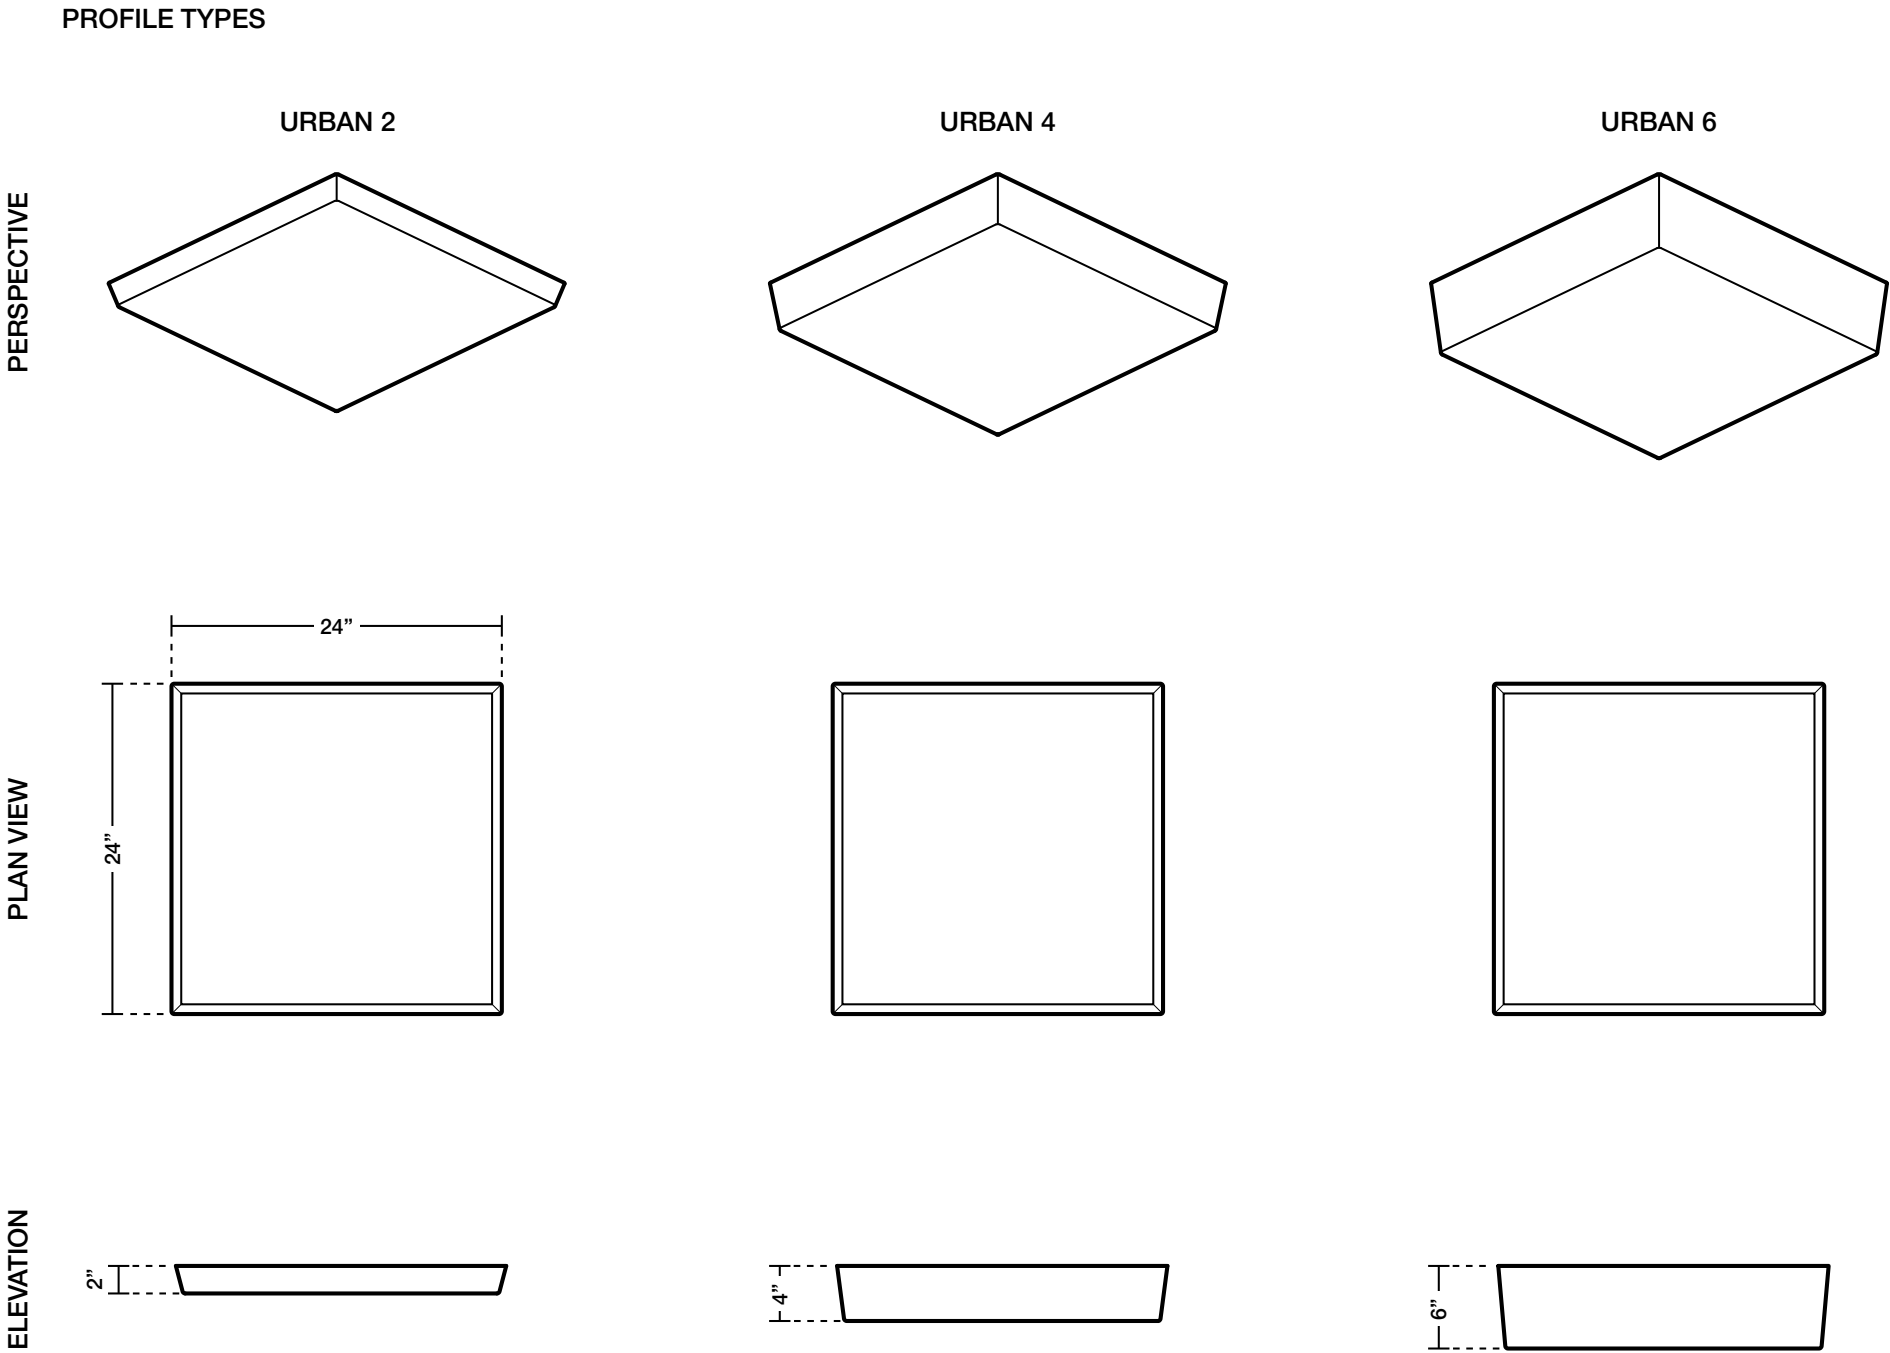


ALL DIMENSIONS NOMINAL UNLESS NOTED OTHERWISE




Typical Layouts

- Uniform
Use the same tile across the ceiling to create a consistent look.
- Crosshatch
Alternate different tile depths to create a staggered look.
- Random
Mix all the tile depths to create a dynamic look.
- Combination
Combine tiles across families, make sure to review the Tile Coordination & Lighting Coordination pages


UNIFORM

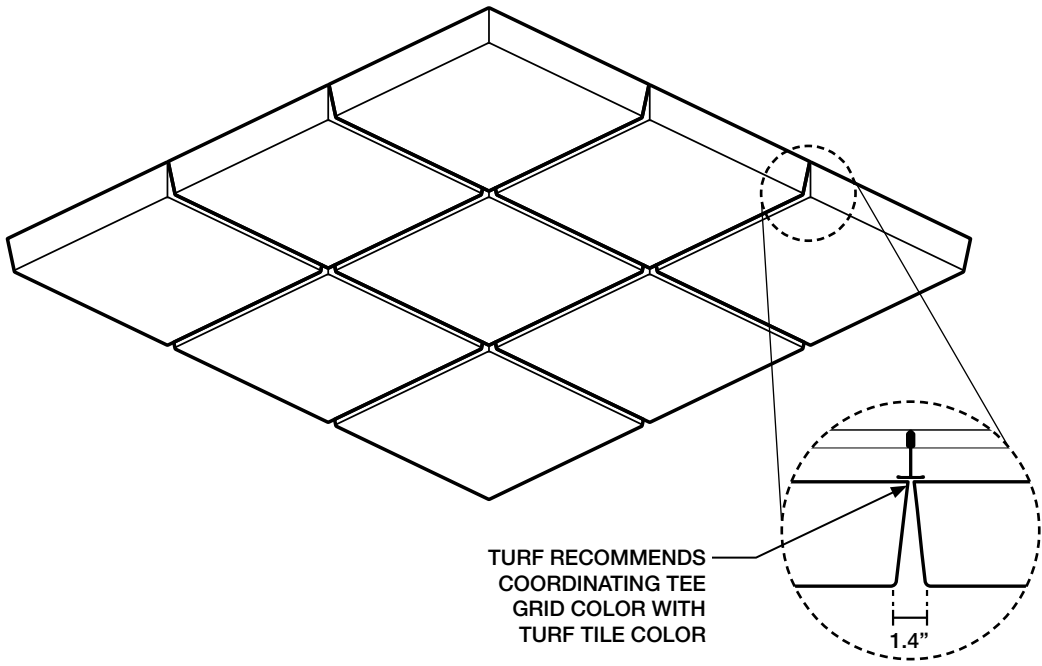


CROSSHATCH

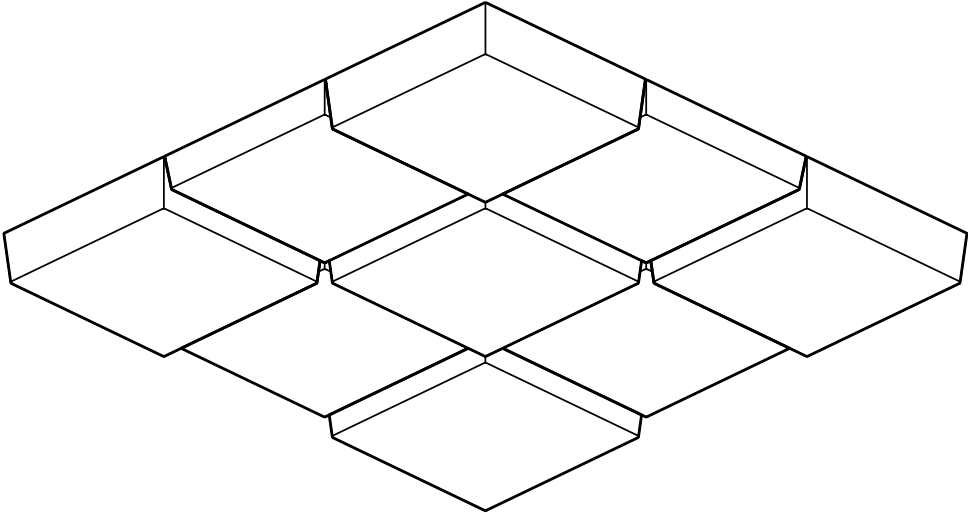

RANDOM

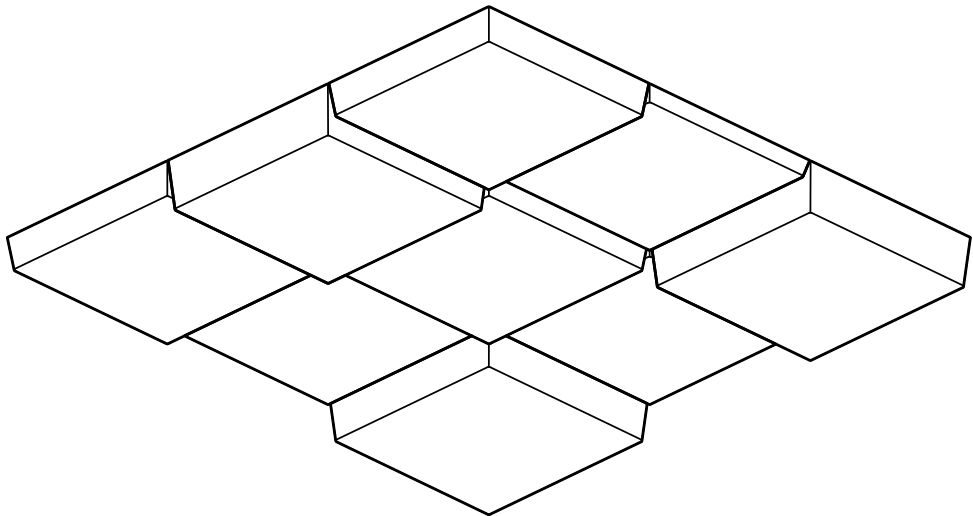

COMBINATION

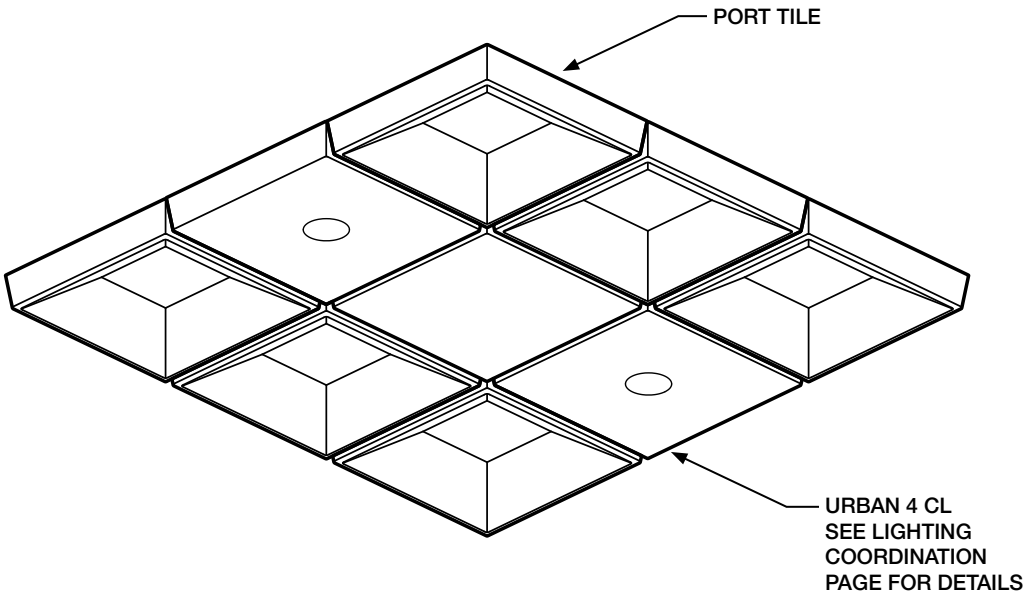

ALL DIMENSIONS NOMINAL UNLESS NOTED OTHERWISE

Connections


9/16" or 15/16" Tee Grid

Seismic Connection


Magnetic Clips
Grid Clips
Torsion Spring

If your project is located in a seismic zone, use our Torsion Spring connection.


MAGNETIC CLIP & GRID CLIP

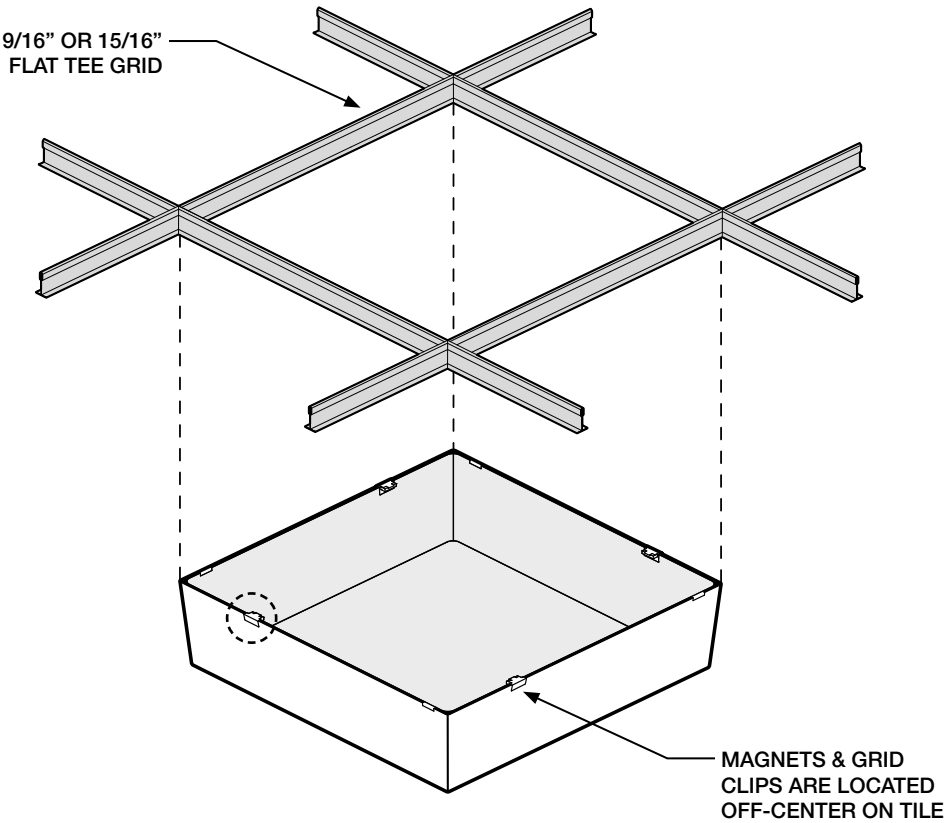


MAGNETIC CLIP




GRID CLIP




TORSION SPRING

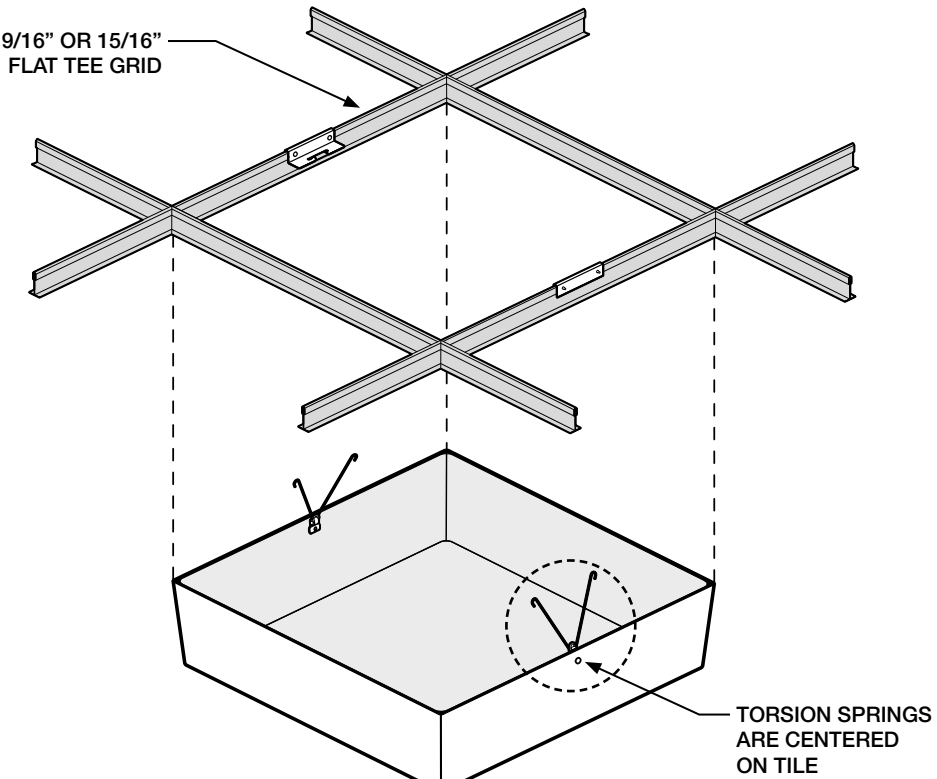

TORSION SPRING ASSEMBLY



TORSION SPRING LOCKED IN PLACE



1 DRILL 1" SCREW THROUGH ONE OF THE PRECUT HOLES IN THE TILE

2 PLACE LOOP CLAMP THROUGH CENTER OF SPRING AND USE WELD NUT TO HOLD ENTIRE ASSEMBLY IN PLACE



Mounting Considerations

- Adhesive Strips

The adhesive strips are used to hide the exposed edge of the magnets.
- Knock Outs

Each side of the tile includes pre-cut knock outs in case magnets need to be moved during installation.
- Torsion Spring Assembly

The Torsion Spring mounting height can be adjusted in field.

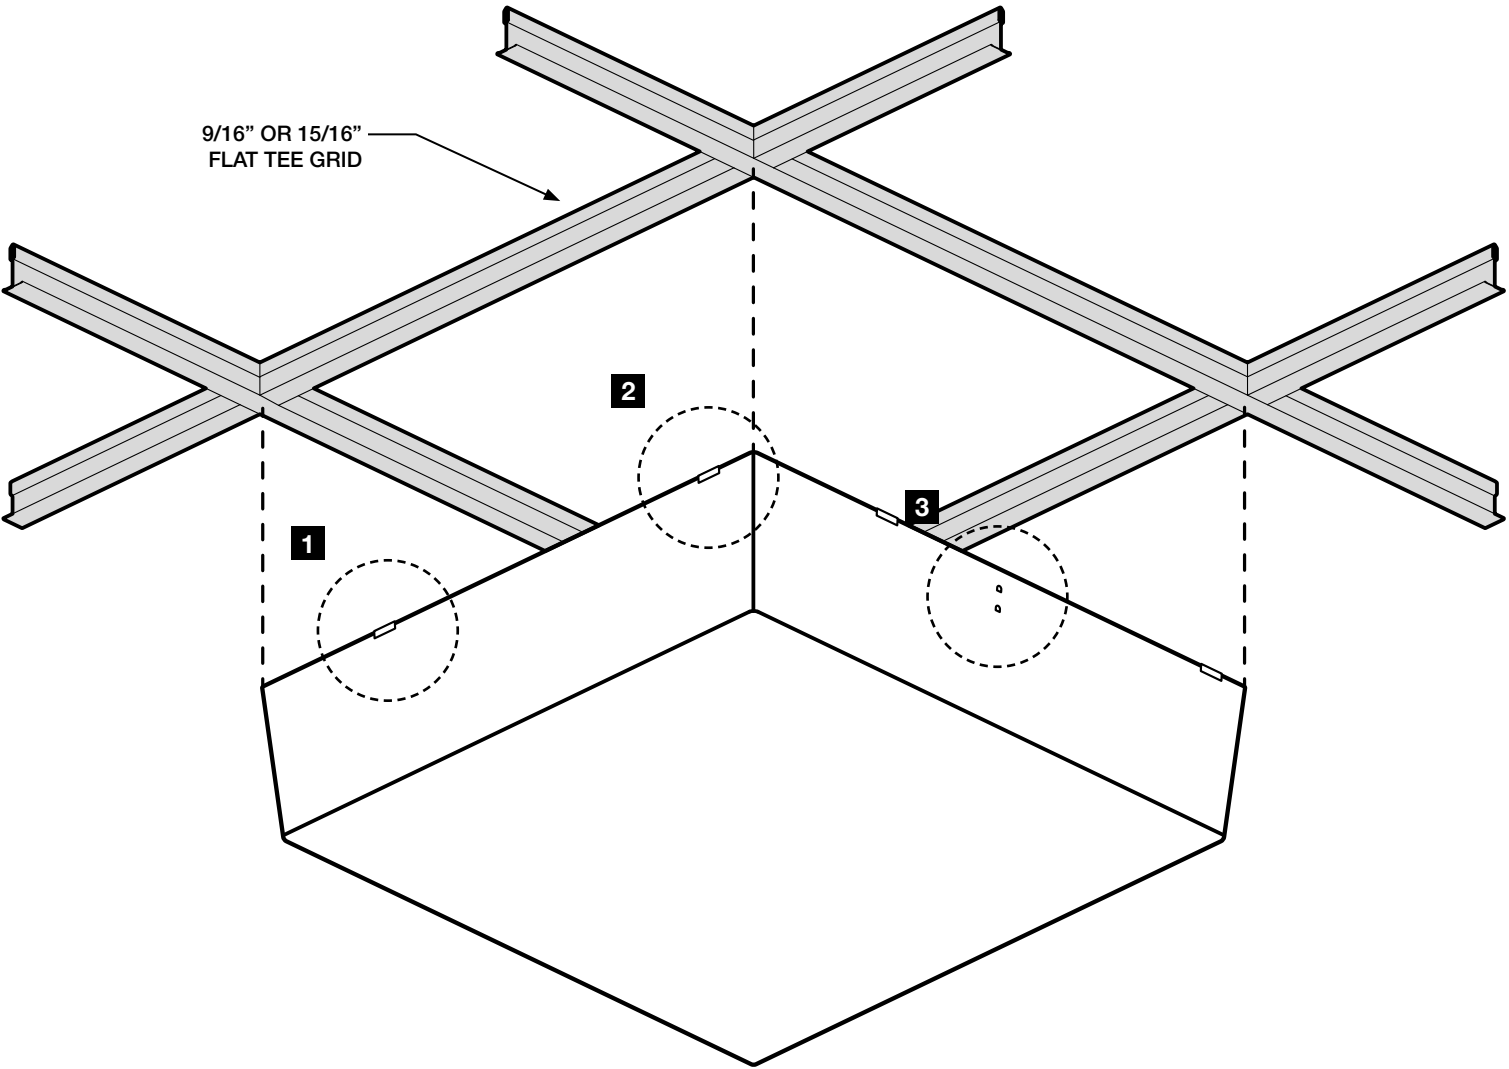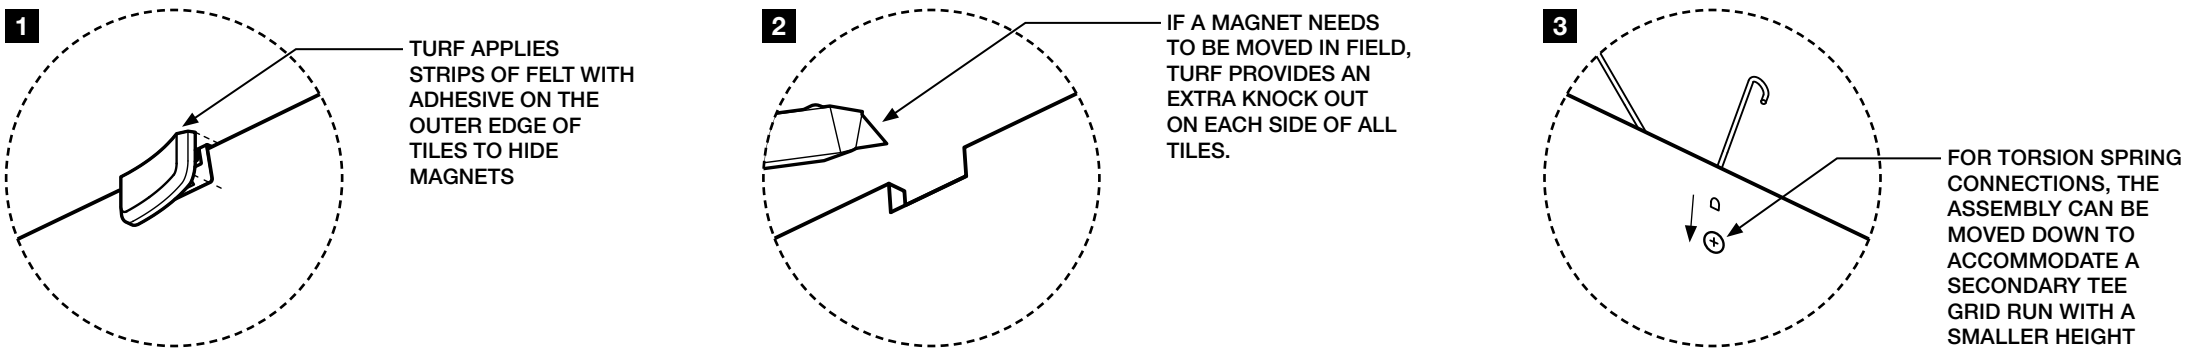

Tile Coordination

Tile Line

Tiles within the same family or similar depths can work well together.

See Typical Layouts page for examples.

Infill Tiles


Plain, flat tiles can be used where field cutting is required to work around obstructions.

Infill tiles act like traditional lay-in ACT tiles. Magnets can be added upon request to hide the grid.


Infill Standard Size

24"L x 24"W x 14mm D


2" DEEP COORDINATION




URBAN 2




VORONOI




CREASE



PYRAMID




ARCADE




INFILL TILE


4" DEEP COORDINATION




URBAN 4



VORONOI




PORT




INFILL TILE


6" DEEP COORDINATION




URBAN 6




CREASE



ARCADE



INFILL TILE

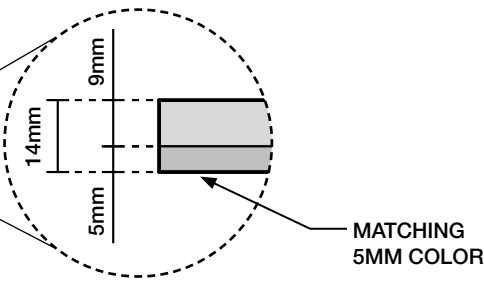

Lighting Integration

Design

Turf offers multiple precut holes that are designed to work with fixtures by USAI.

USAI Fixtures

BeveLED Mini® for Turf - 3" Round
BeveLED® 2.2 for Turf - 4.5" Round
BeveLED Mini® for Turf - 3" Square
BeveLED® 2.2 for Turf - 4.5" Square


For more information visit www.usailighting.com/turf-design

Coordination

Tiles have precut square or round holes in two different sizes.

Please note, tiles do not include light fixtures.

PROFILE TYPES

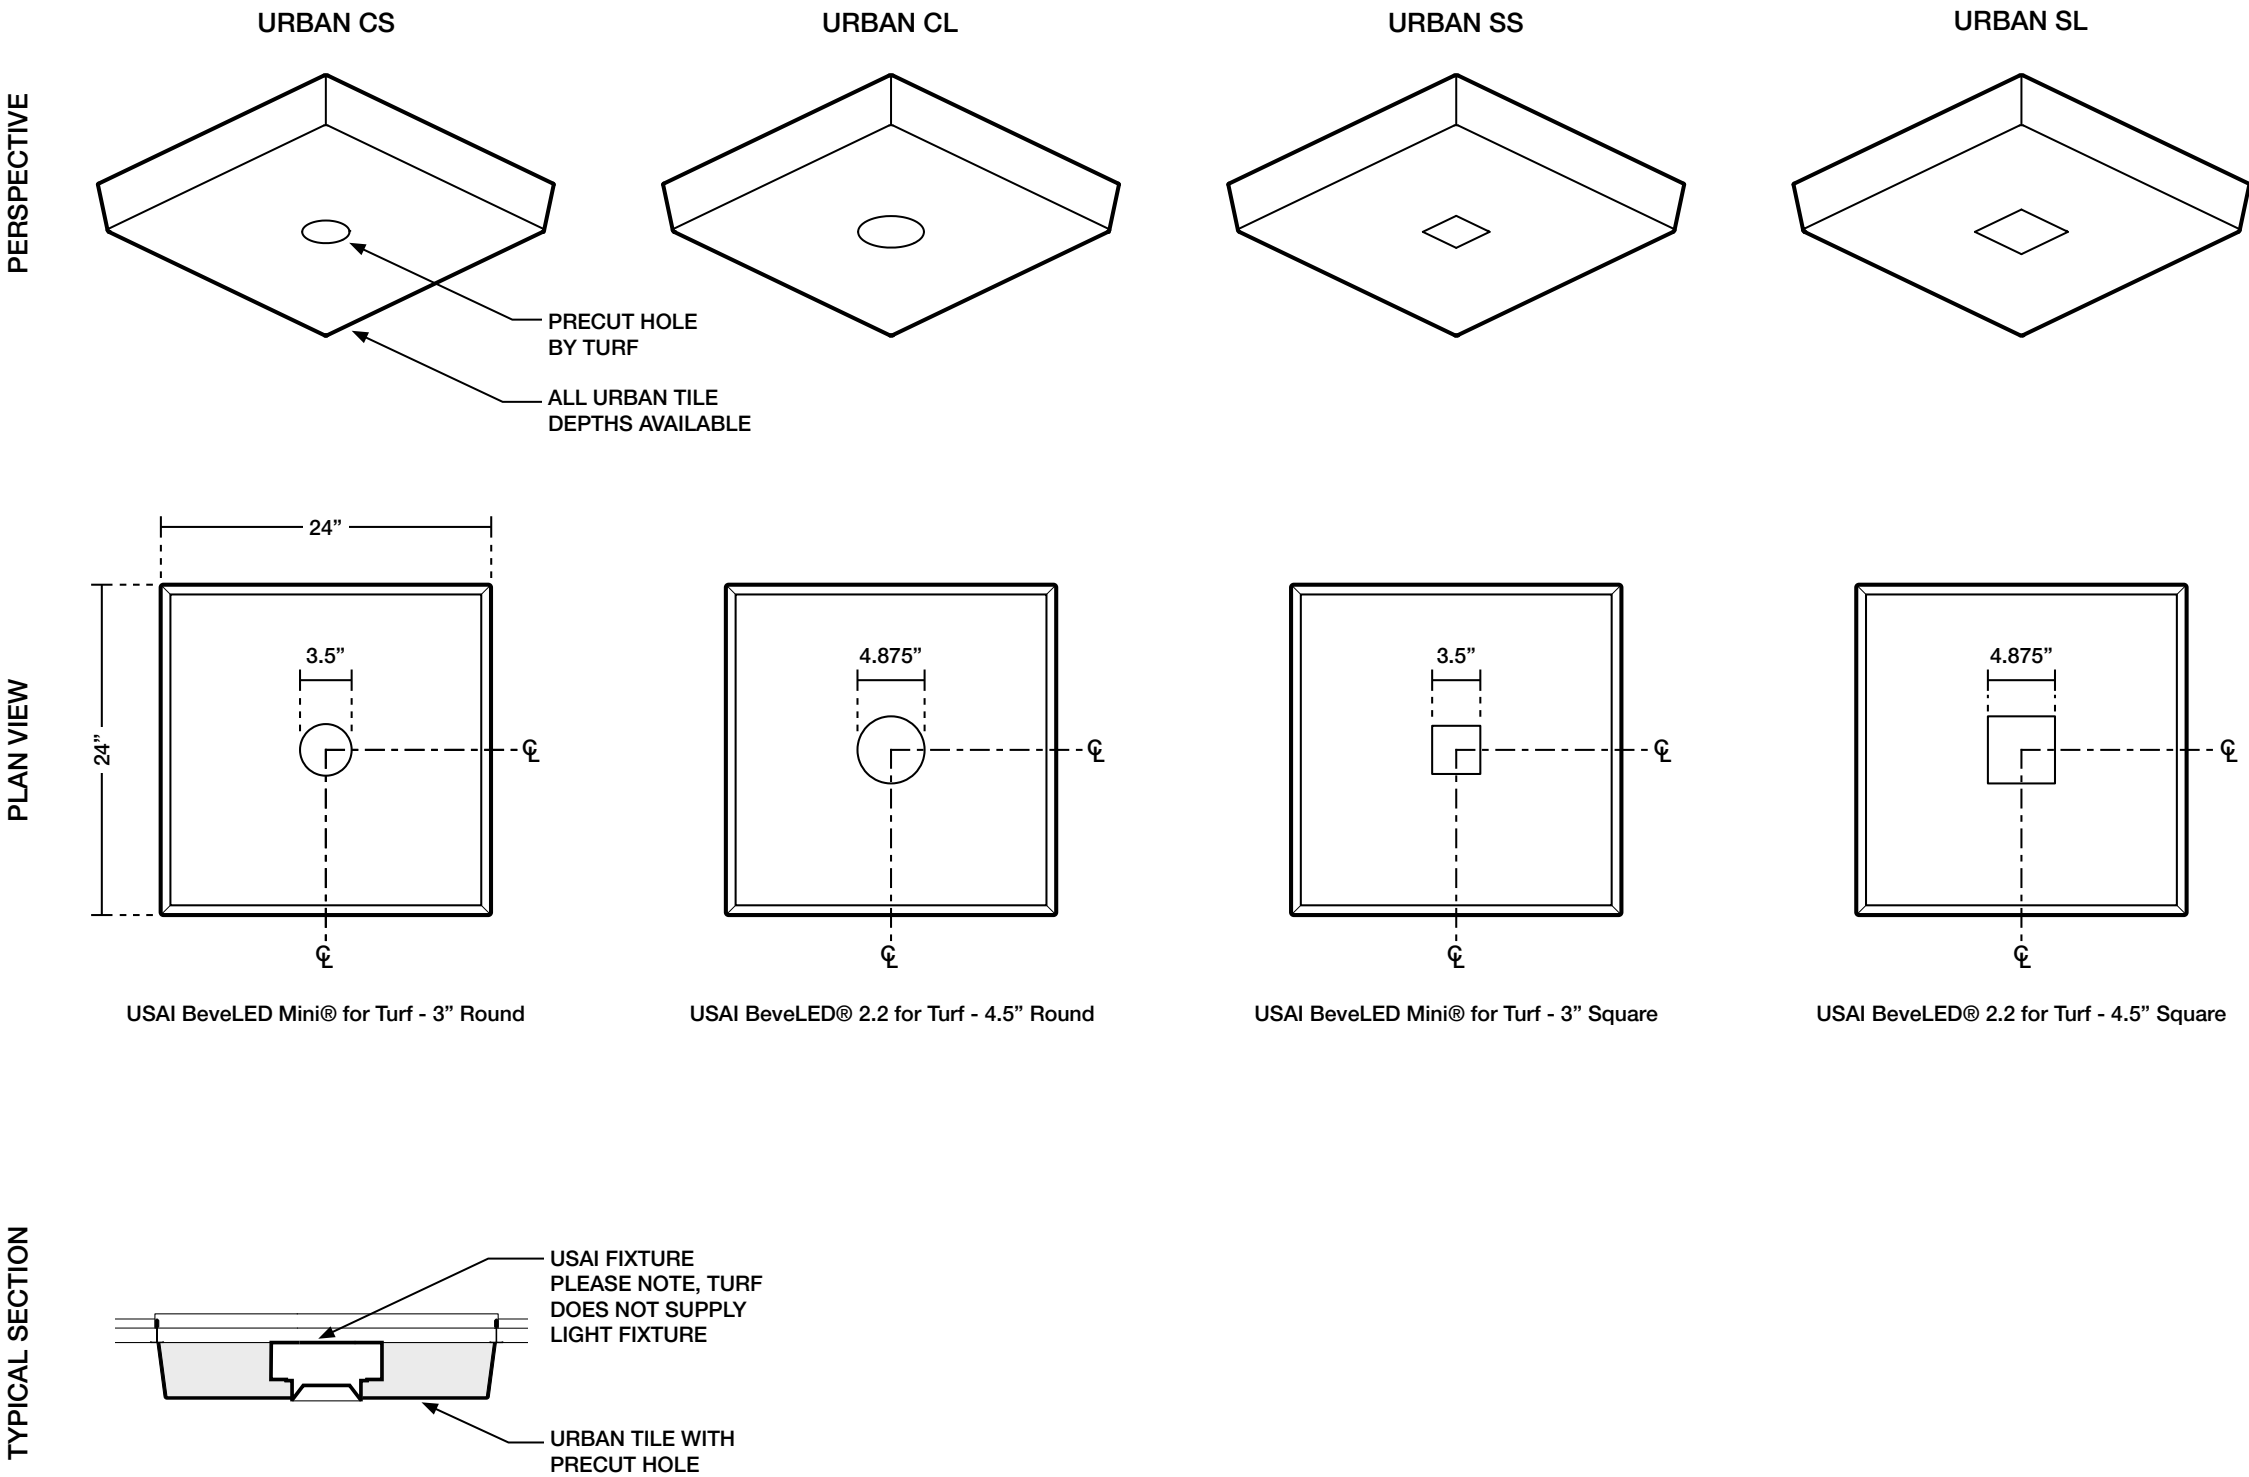


ALL DIMENSIONS NOMINAL UNLESS NOTED OTHERWISE




Trim Guide

Our tiles are designed to install quickly, with modifications that are easily done in the field.


Tools Required




SHARP BLADE



STRAIGHT
EDGE




DRILL



HOLE SAW

1 - TRIM OR DRILL TILE FACE


TRIM OR DRILL TILE
FACE TO ACCOMMODATE
FIXTURES AND
OBSTRUCTIONS

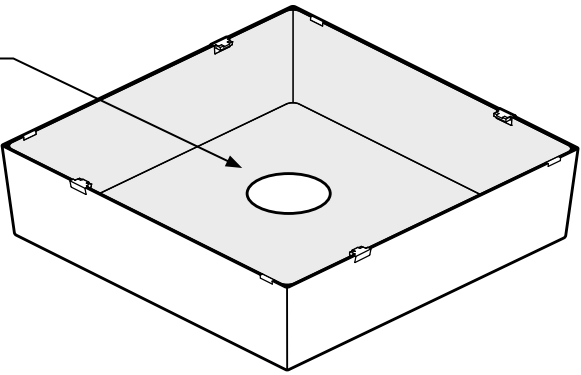

*PLEASE NOTE, TO CUT CIRCULAR HOLES TURF RECOMMENDS
USING A HOLE SAW IN REVERSE FOR A CLEANER EDGE

3 - TRIM TILE TO FIT - TORSION SPRING


TRIM TILE AS REQUIRED
TO FIT SPACE

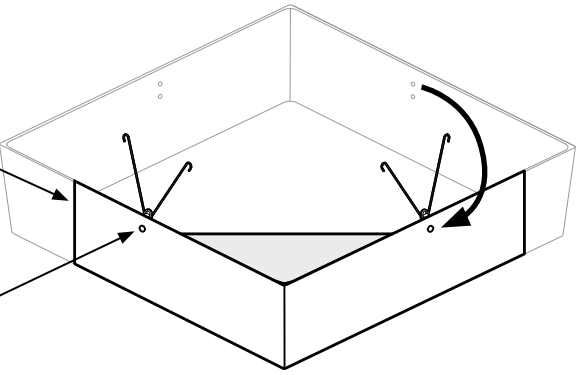

TURF RECOMMENDS THAT
TILES MAINTAIN A MINIMUM
OF TWO CONNECTION POINTS
FOR TORSION SPRINGS, MOVE
SPRINGS AS REQUIRED

2 - TRIM TILE TO FIT - MAGNETIC OR GRID CLIPS

TRIM TILE AS REQUIRED
TO FIT SPACE

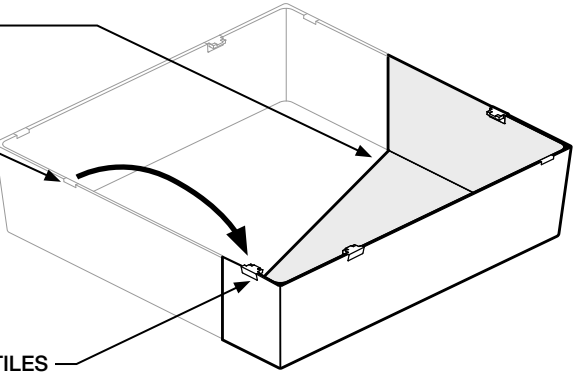


MAGNETS OR CLIPS
CAN BE MOVED AS
REQUIRED. ADDITIONAL
MAGNETS OR CLIPS CAN
BE ADDED IN FIELD.

TURF RECOMMENDS THAT TILES
MAINTAIN A MINIMUM OF THREE
CONNECTION POINTS FOR
MAGNETIC OR GRID CLIPS

4 - TRIM OR DRILL INFILL TILE

TRIM OR DRILL TILE TO
ACCOMMODATE FIXTURES
AND OBSTRUCTIONS

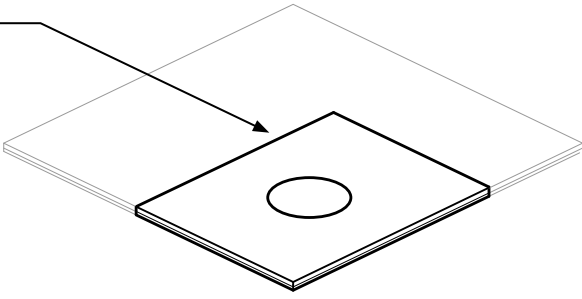

*PLEASE NOTE, TO CUT CIRCULAR HOLES TURF RECOMMENDS
USING A HOLE SAW IN REVERSE FOR A CLEANER EDGE

Tech	
Acoustics	ASTM C423-17 Type E-400 Mounting
Fire Rating	ASTM E-84 – Class A
VOC	ASTM D5116 Compliant

Details	
Lead Time	Check the Turf website for current lead times.
Warranty	Five (5) years
Maintenance	Vacuum to remove any particulate matter and air-borne debris or dust. Compressed air can be used to dust the material in difficult to reach areas for large assemblies. Contact us for more information relative to spot cleaning.
Weight	Turf products cannot support the weight of any other items in field.

Acoustic Rating	
NRC = 0.95	
	A grid of ceiling tiles arranged in four rows of four units.

Certifications







Image by Blaque

5mm Colors

Turf's compression molded ceiling tiles are made with 5mm PET felt.

The process used to create PET felt often results in a heathered effect where multiple tones are present. Slight variations in color should be expected when using this sustainable

Felt Thickness
5mm +/-0.5 mm


Monitors and printers vary.
Please request a material sample to verify felt colors.



M07 ONYX



M06 CARBON



M04 PUMICE



M05 TALC



M01 SANDSTONE



M48 TRAVERTINE