Acoustic Ceiling Baffle

Contour

Sculpt quiet surfaces

Curate sculptural acoustic art with Contour baffles. Designed to account for every architectural detail (from windows to sprinklers) this system's dimensional forms are infinitely flexible. A dulcet sight to remember.





Photograph by Mark Herboth


How To Specify


Key Information


Contour can take shape in your space in a variety of ways. Consider these questions as you design your layout.

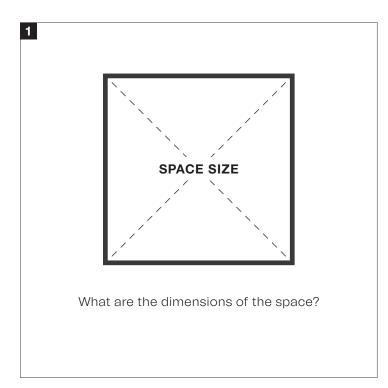


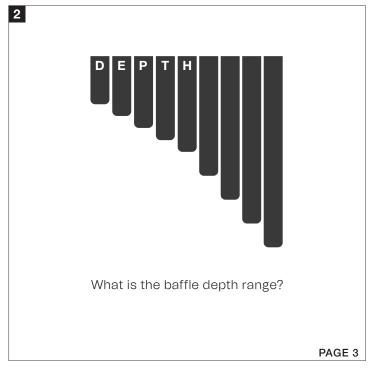

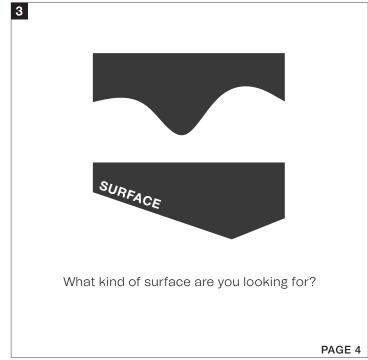

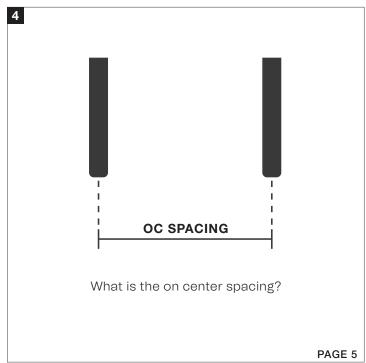

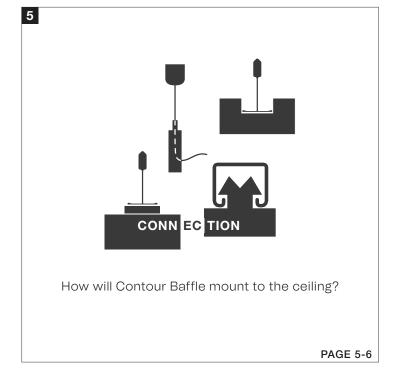

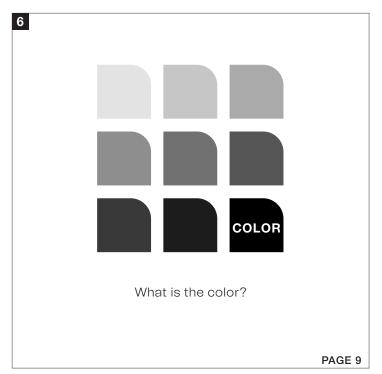

turf.design Contour Baffle | 04.04.2023 2

Dimensions

Variable Length 12"L Min - 119"L Max

Small Range 12" ≤ L < 36"

Medium Range 36" ≤ L < 72"

Large Range 72" ≤ L ≤ 119"

Variable Depth 4"D Min - 47.5"D Max

Contour Baffle can have any depth within the above range.

Standard Depths 6"D, 7.5"D, 9.375"D, 11.5"D

Recommended Connection Options

P1000T Unistrut Feltlock

9/16" or 15/16" Tee Grid Gridlock

Cable Hung Cable To Deck

Magnetic Exposed Magnet

See our "Recommended & Alternative Connections" pages for more Connection

options.

Color

9mm PaletteContour Baffle can be

specified in any of our 9mm


felt colors.

Color Match Have another color in mind?

Our UV printing process can match almost any hue.

Note: cut edges of Contour will show the baffle's base felt

color.

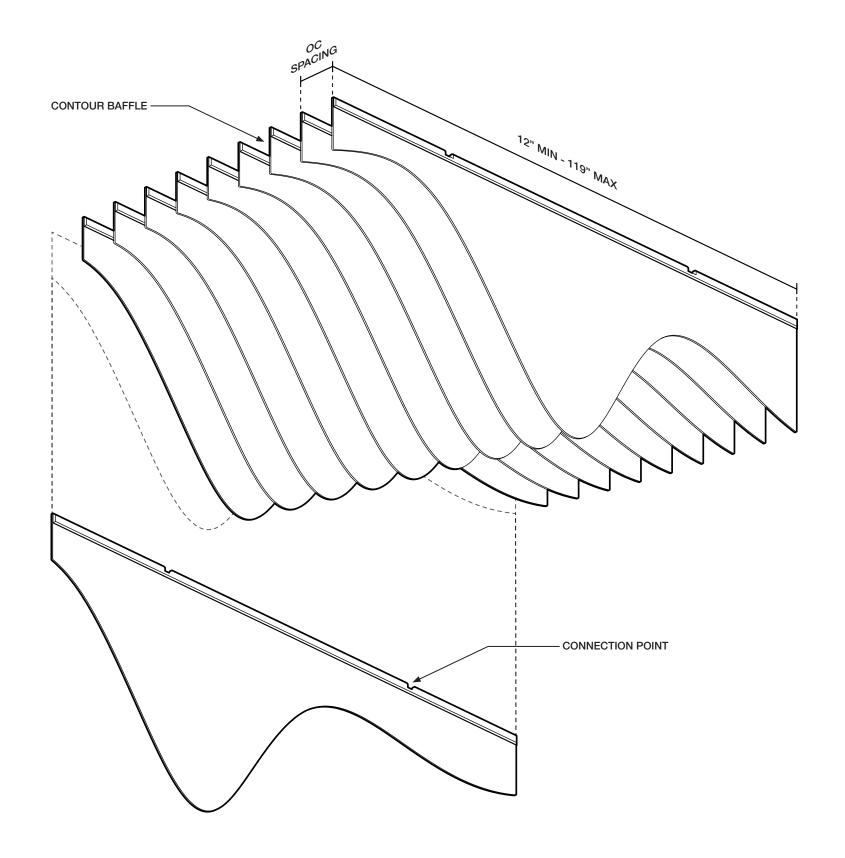

ALL DIMENSIONS NOMINAL UNLESS NOTED OTHERWISE



Custom Surface

Contour Form Organic flows or geometric

forms, sculpt Contour to fit your space and vision.

Client Surface Have a custom surface you'd

like to use Contour with? Send us a model and we'll


take it from there.


Turf Design Team Send us a description of

what you're looking for.
Our designers will create
something uniquely tailored


to you.


EXAMPLE SURFACE

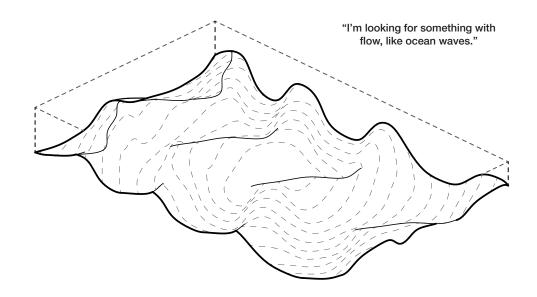

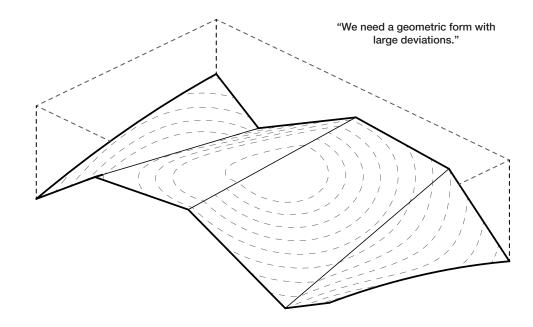

CONTOUR BAFFLE GENERATION

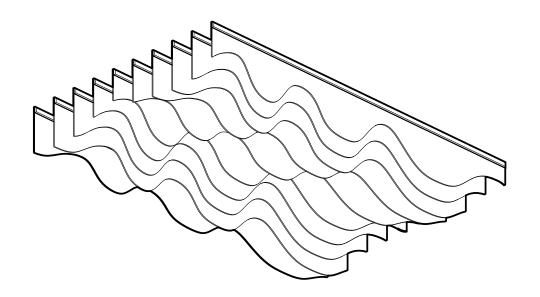

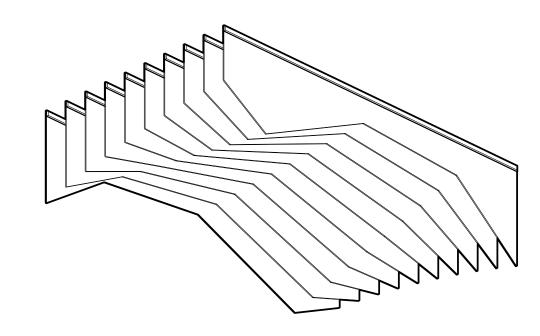

7

Recommended Connections

Connection Spacing

60" OC Max

Spacing varies per project.
Baffles require a minimum of two connection points.

Feltlock

Products with Turf's patented Feltlock flex and compress to

insert into Unistrut.

P1000T Unistrut, raw galvanized finish or

powder-coated, hardware is

required.

Painted unistrut may damage Feltlock installations and will void the product warranty.

Cable To Deck

Baffles with embedded cable grippers snap into deck-

mounted aircraft cables.

10' aircraft cable supplied by

Turf should be trimmed in the

field as needed.

Gridlock

The Gridlock attachment flexes to grasp the tee grid.


9/16" or 15/16" flat tee grid is

required.


Exposed Magnetic


A powerful attachment to 9/16" or 15/16" tee grid for secure and easy installation.


CONNECTION SPACING

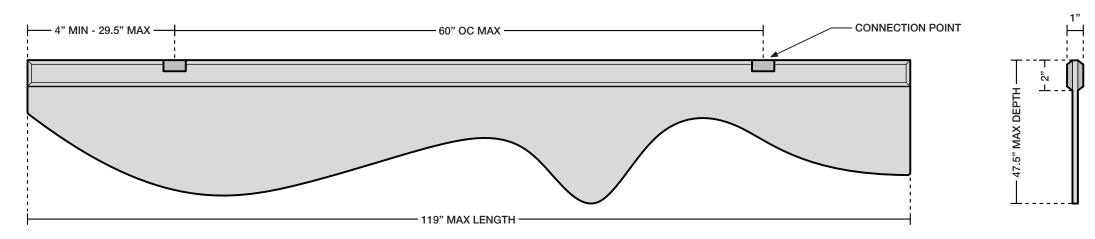

RECOMMENDED CONNECTIONS

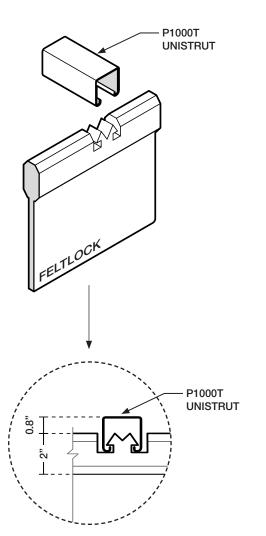

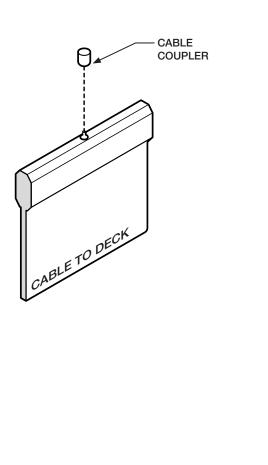

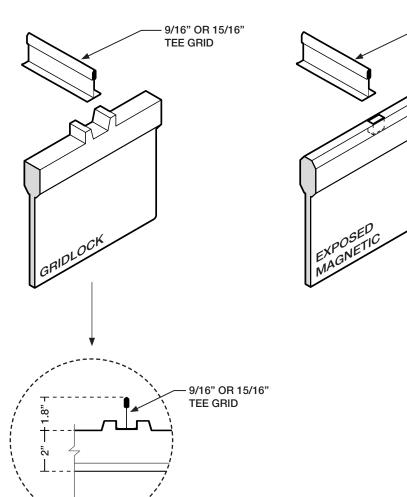



9/16" OR 15/16" TEE GRID

7

Alternative Connections

Additional Options Beyond our standard

connections, we offer the following connection options

for Contour too.

Cable to Unistrut P1000T Unistrut

Threaded Rod to Unistrut

Rotated Feltlock

9/16" or 15/16" Tee Grid Cable to Tee Grid


Embedded Nut to Bolt-Slot


Grid Clip

Panel Clip Miscellaneous


> Embedded Nut Threaded Rod

ALTERNATIVE UNISTRUT CONNECTIONS

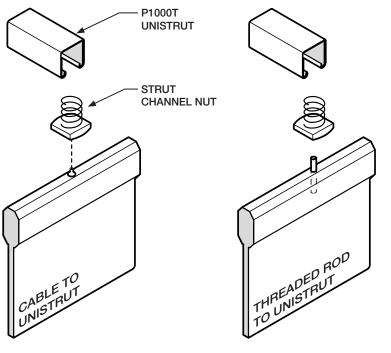


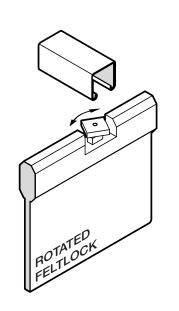



ALTERNATIVE TEE GRID CONNECTIONS

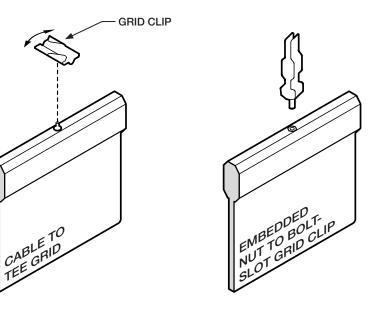

ALTERNATIVE MISCELLANEOUS CONNECTIONS





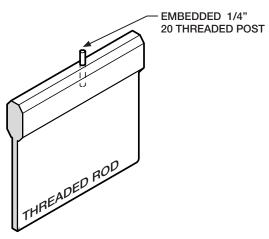

Layout Considerations

Wall Clearance Turf recommends a 4" clearance from the wall to

our baffles.

Adjacent Baffle Clearance


Turf recommends a 1" gap between all rows of baffles. This clearance supports a uniform look and build.


If you're looking for no clearance between baffles, we can supply hardware to accommodate at an additional cost.


Trim in Field


Contour Baffle ends can be trimmed in field as required.

Please do not trim between baffle connection points or connection pieces.

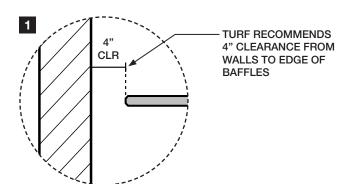

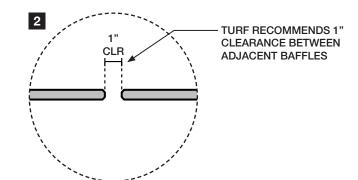

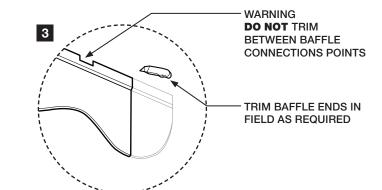

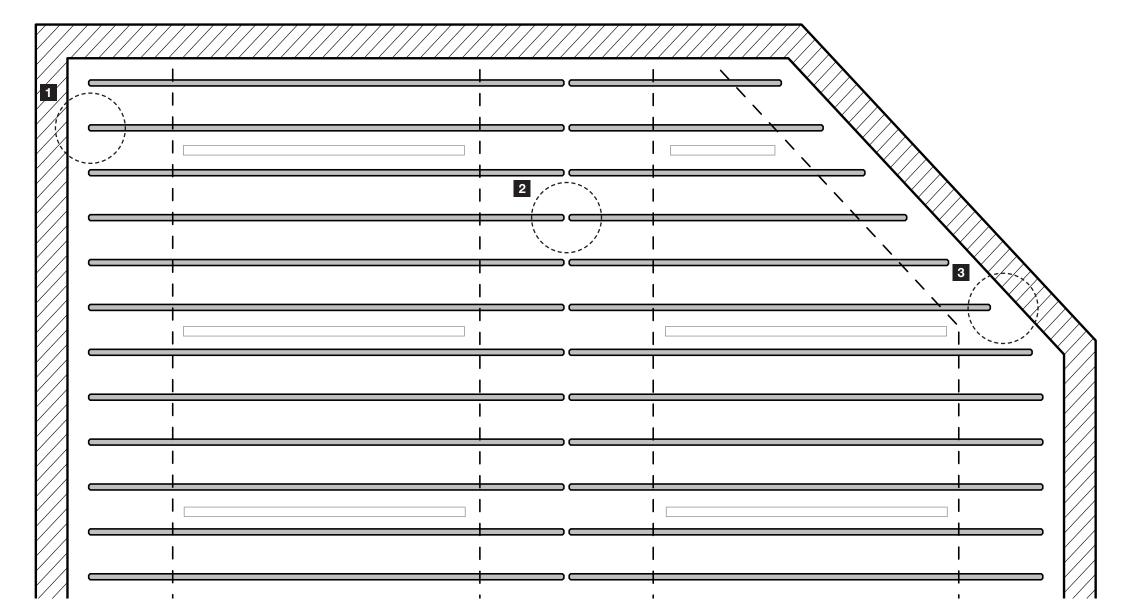

CONTOUR BAFFLE - EXAMPLE RCP

turf.design Contour Baffle | 04.04.2023 7

Tech

Acoustics ASTM C 423-17: Type J

Fire Rating ASTM E-84 – Class A

VOC ASTM D5116 Compliant

Acoustic Rating

Contour Baffle NRC				
Depth	6" OC	12" OC	18" OC	24" OC
4"	0.4	0.25		
6"	0.55	0.4	0.3	0.25
7.5"	0.65	0.5	0.35	0.3
9.375"	0.75	0.55	0.45	0.4
12"	0.85	0.65	0.55	0.45
16"		0.85	0.65	0.55
24"		1.1	0.9	0.75
48"				1.35

The table displaces information for an array of sound absorbing baffles suspended by cables, evenly distributed in four rows of four units.

Details

Lead Time Check the Turf website for

current lead times.

Warranty Three (3) years

Maintenance Vacuum to remove any

particulate matter and air-borne debris or dust.
Compressed air can be used to dust the material in difficult to reach areas for large assemblies. Contact us for more information relative to

spot cleaning.

Weight Turf products cannot support the weight of any other items

in field.

Certifications









Photograph by Mark Herboth



Photograph by Steve Hall

turf.design Contour Baffle | 04.04.2023 8

9mm Colors

Introducing Hues, our new 9mm color palette designed for the senses.

The 9mm PET felt board is used as our primary construction material. Select one of our coordinating neutrals to blend in, or go for a contrasting element with one of our hues.

The process used to create PET felt often results in a heathered effect where multiple tones are present. Slight variations in color should be expected when using this sustainable material.

Felt Thickness 9mm +/-0.5 mm

Monitors and printers vary. Please request a material sample to verify felt colors.



turf.design Contour Baffle | 04.04.2023 9

07 BLACK

06 CHARCOAL