

Acoustic Ceiling Baffle

Doppelganger

Shift your perspective

Shift perspective from every angle with Doppelganger. With a two-tone design, the baffles' dominant color changes based on one's vantage point, energizing your space in surprising ways while damping superfluous sound.



How To Specify

Key Information

Doppelganger can shape shift through your space in a variety of ways. Consider these questions as you design your layout.


Spacers & End Caps

Turf supplies Spacers & End Caps for baffle orders that require P1000T unistrut.

Follow the link below for more detailed information.

[Spacers & End Caps Guide](#)

1

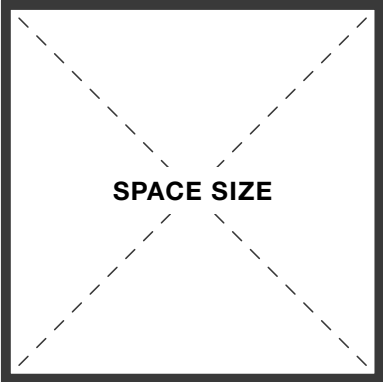


SPACE SIZE

What are the dimensions of the space?

PAGE 3

2



D E P T H

What is the baffle depth range?

PAGE 3

3




SURFACE

What kind of surface are you looking for?

PAGE 4

4

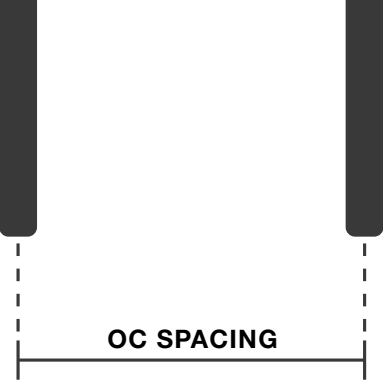


OC SPACING

What is the on center spacing?

PAGE 5

5

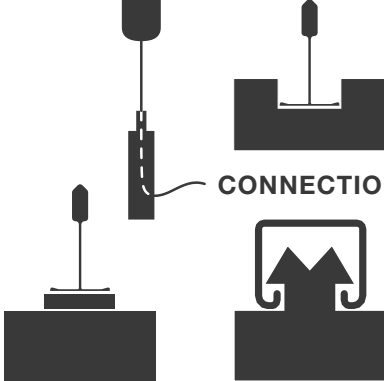


CONNECTION

How will Doppelganger Baffle mount to the ceiling?

PAGE 5-6

6



COLOR

What is the color?

PAGE 9



Dimensions


Variable Length	12"L Min - 119"L Max
Small Range	12" ≤ L < 36"
Medium Range	36" ≤ L < 72"
Large Range	72" ≤ L ≤ 119"
Variable Depth	4"D Min - 48"D Max Doppelganger Baffle can have any depth within the above range.
Standard Depths	6"D, 7.5"D, 9.375"D, 11.5"D

Recommended Connection Options

P1000T Unistrut	FeltLock
9/16" or 15/16" Tee Grid	GridLock
Cable Hung	Cable To Deck
Magnetic	Exposed Magnet
	See our Recommended & Alternative Connections pages for more Connection options.

Color

9mm Palette	Doppelganger Baffle can be specified in any of our 9mm felt colors.
-------------	---

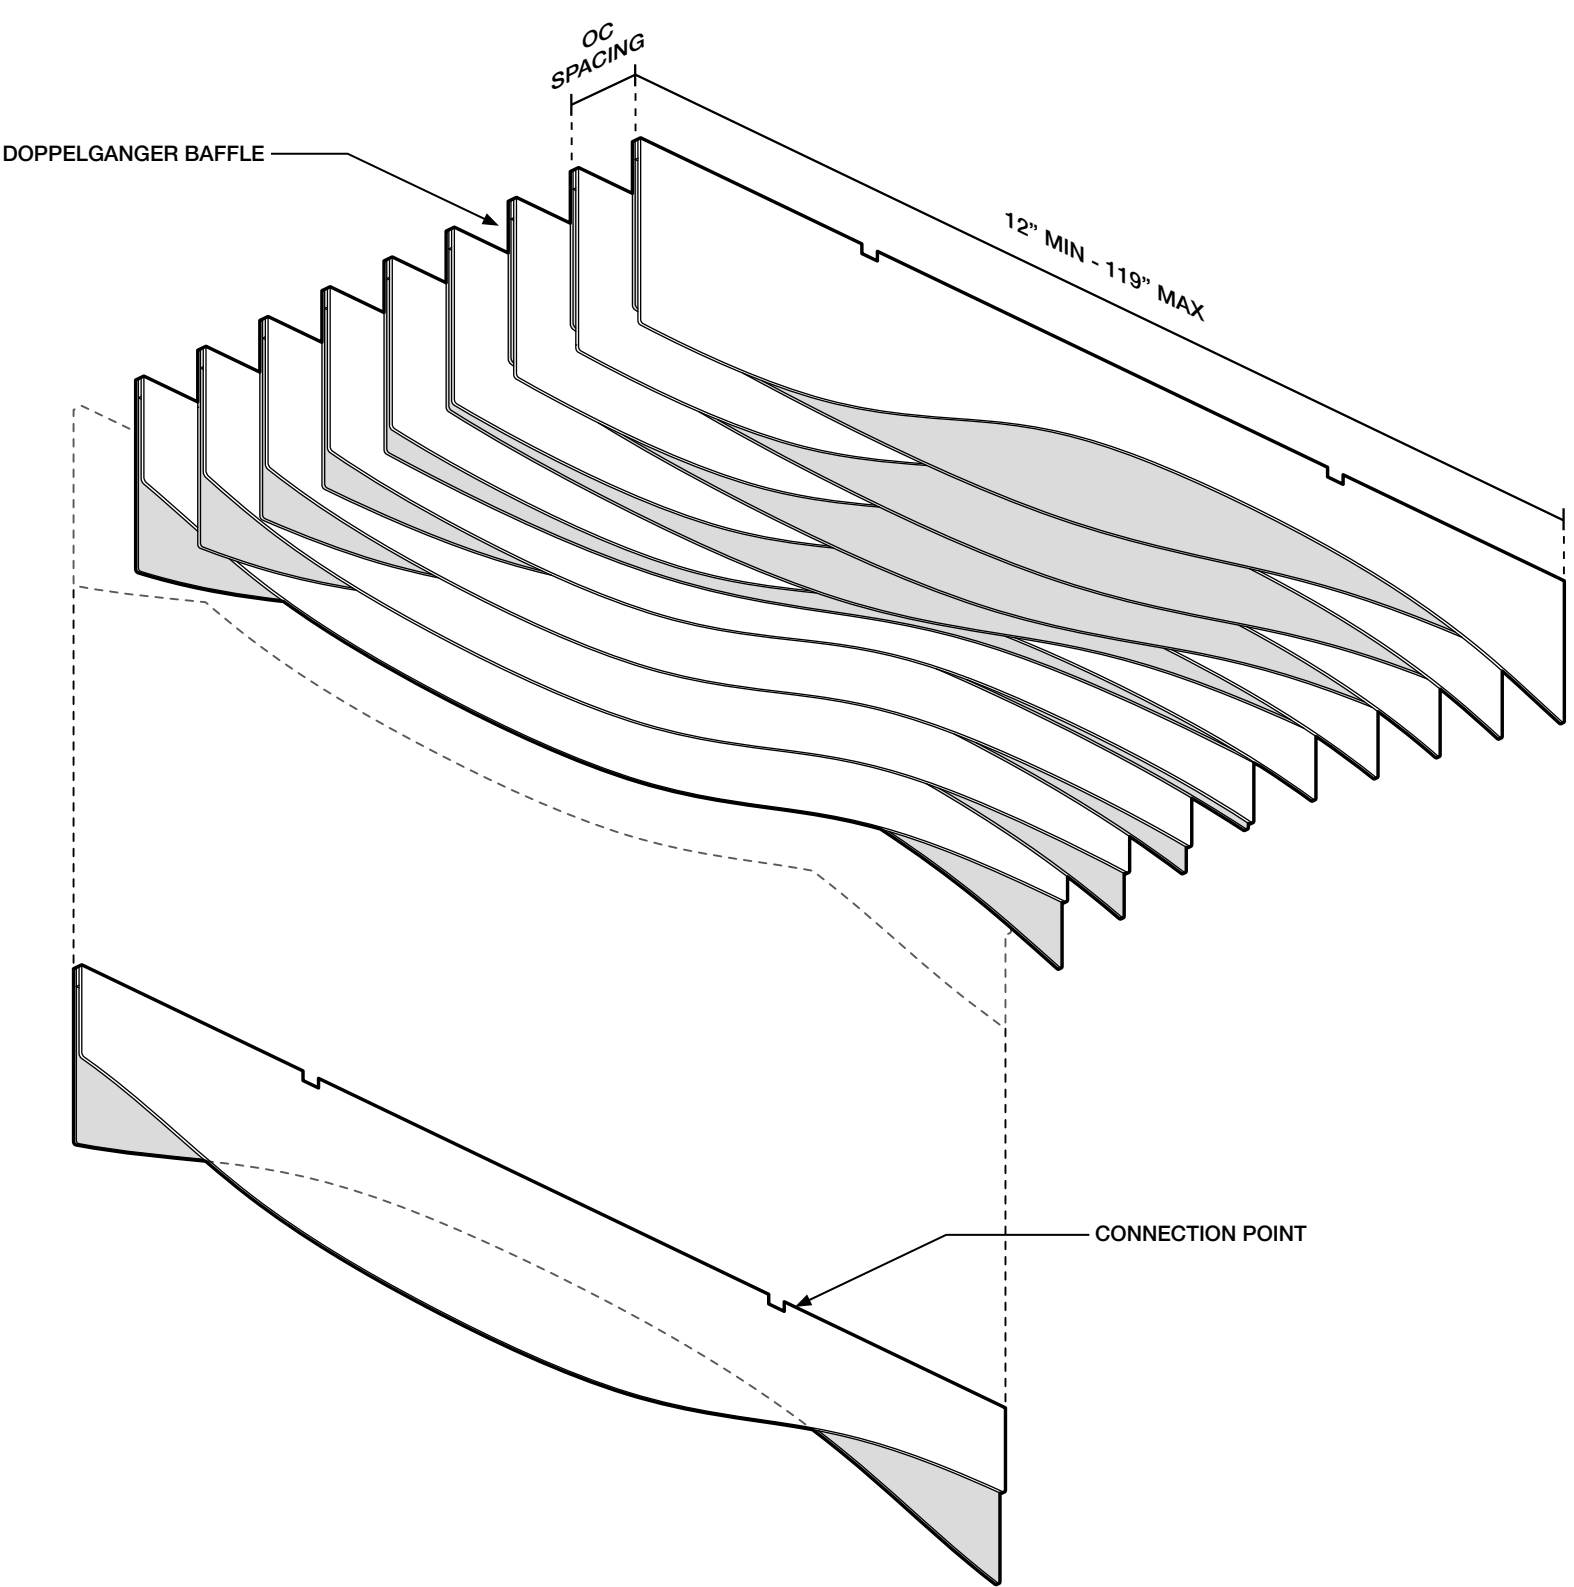

ALL DIMENSIONS NOMINAL UNLESS NOTED OTHERWISE



Custom Surface



- Doppelganger Form

Organic flows or geometric forms, sculpt Doppelganger to fit your space and vision.
- Client Surface



Have a custom surface you'd like to use Doppelganger with? Send us a model and we'll take it from there.
- Turf Design Team

Send us a description of what you're looking for. Our designers will create something uniquely tailored to you.

EXAMPLE SURFACE

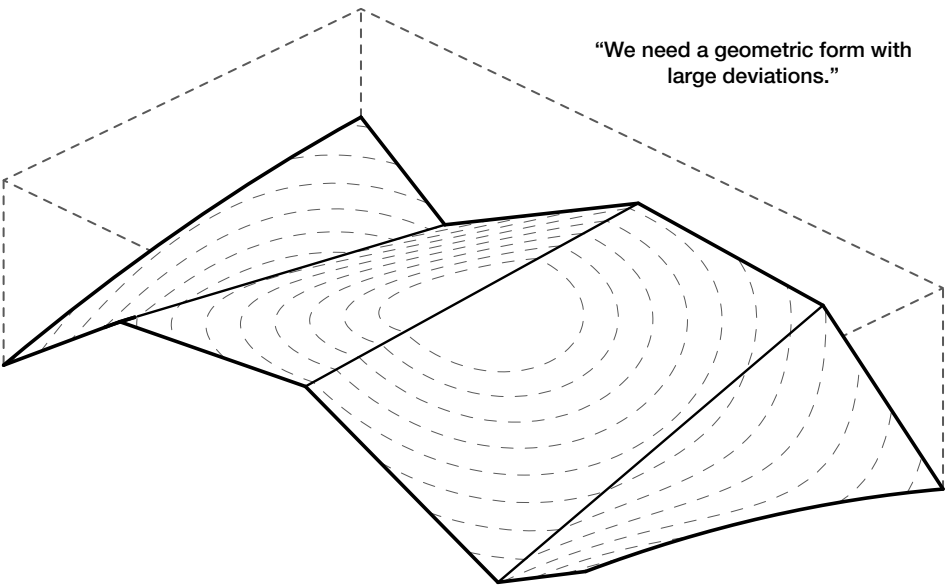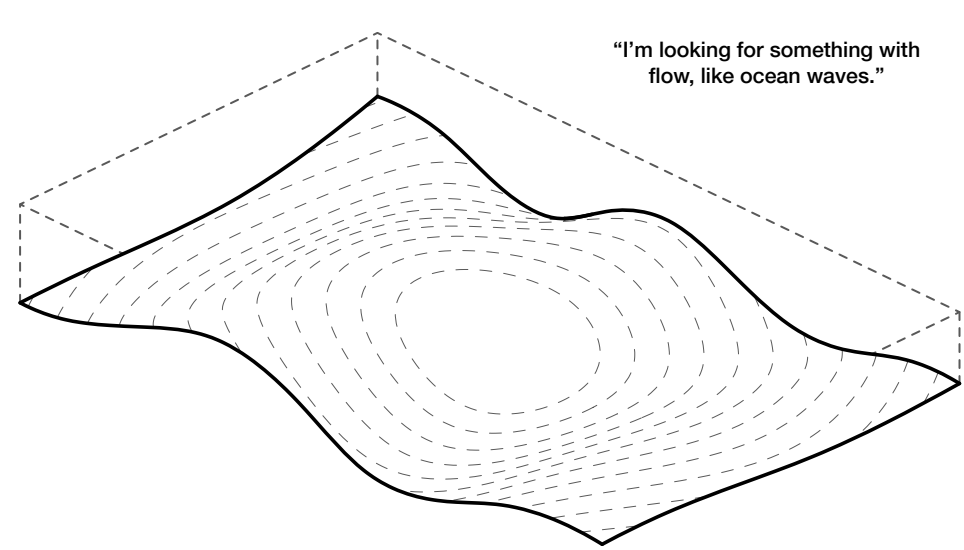

DOPPELGANGER BAFFLE GENERATION

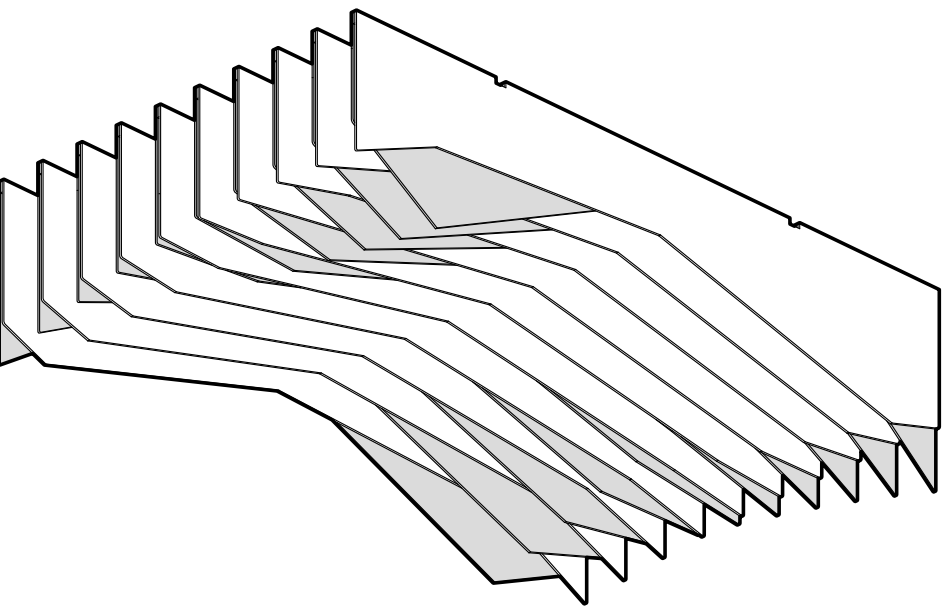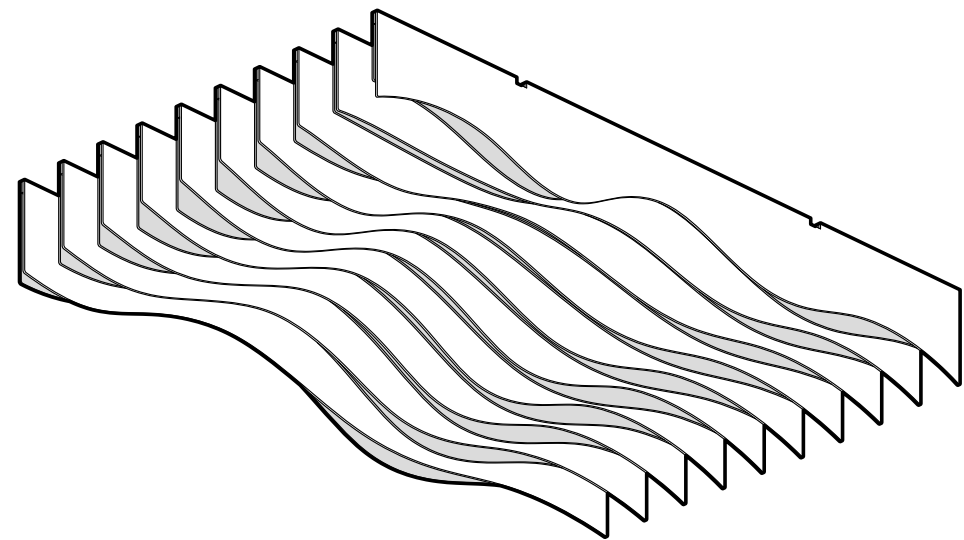

Elevations and Connections

Connection Spacing

60" OC Max

Spacing varies per project. Baffles require a minimum of two connection points.

FeltLock

Products with Turf’s patented FeltLock flex and compress to insert into Unistrut.

P1000T Unistrut, raw galvanized finish or powder-coated, hardware is required.

Painted unistrut may damage FeltLock installations and will void the product warranty.

Cable To Deck

Baffles with embedded cable grippers snap into deck-mounted aircraft cables.

10’ aircraft cable supplied by Turf should be trimmed in the field as needed.

GridLock

The GridLock attachment flexes to grasp the tee grid. GridLock is incompatible with ACT tiles.

9/16" or 15/16" flat tee grid, or 9/16" bolt-slot tee grid is required.


The maximum spacing for this connection is 24" OC.

Exposed Magnetic


A powerful attachment to 9/16" or 15/16" tee grid for secure and easy installation.

The maximum spacing for this connection is 24" OC.

CONNECTION SPACING

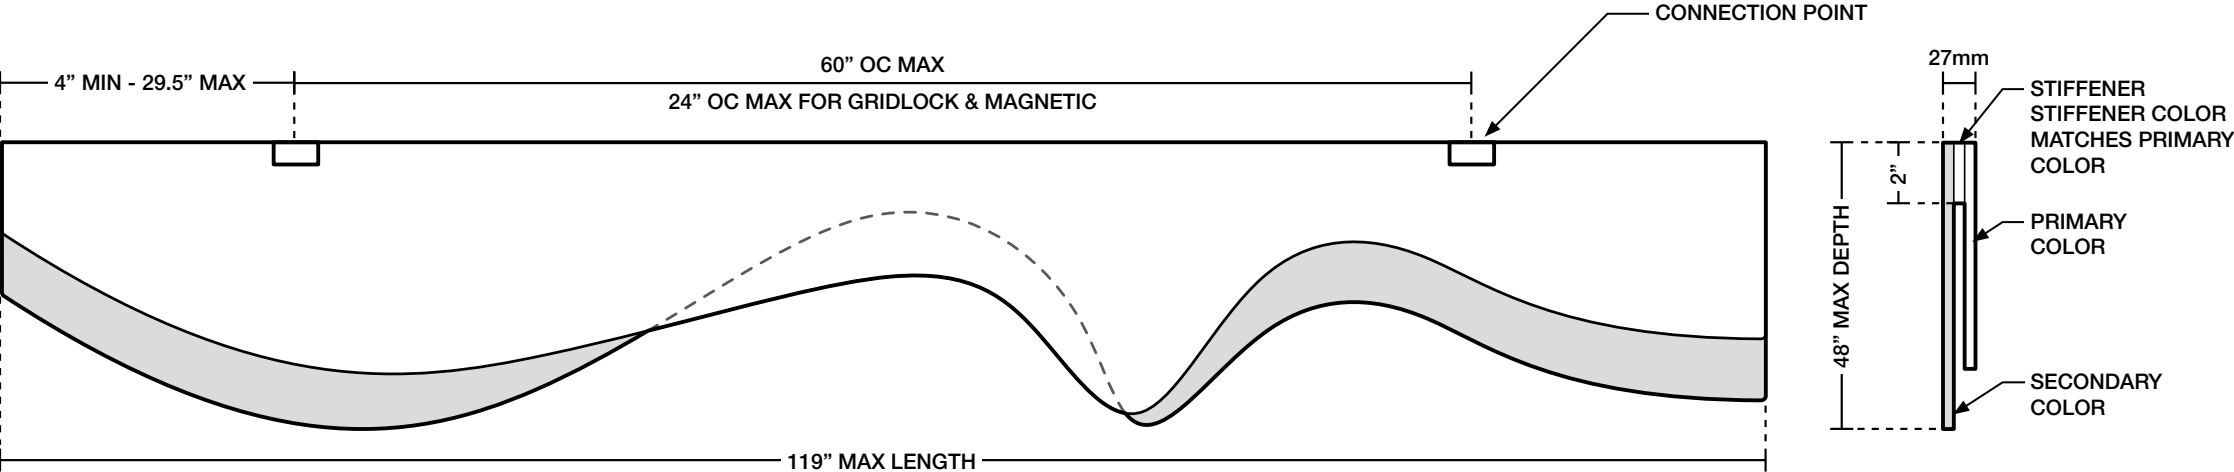

RECOMMENDED CONNECTIONS

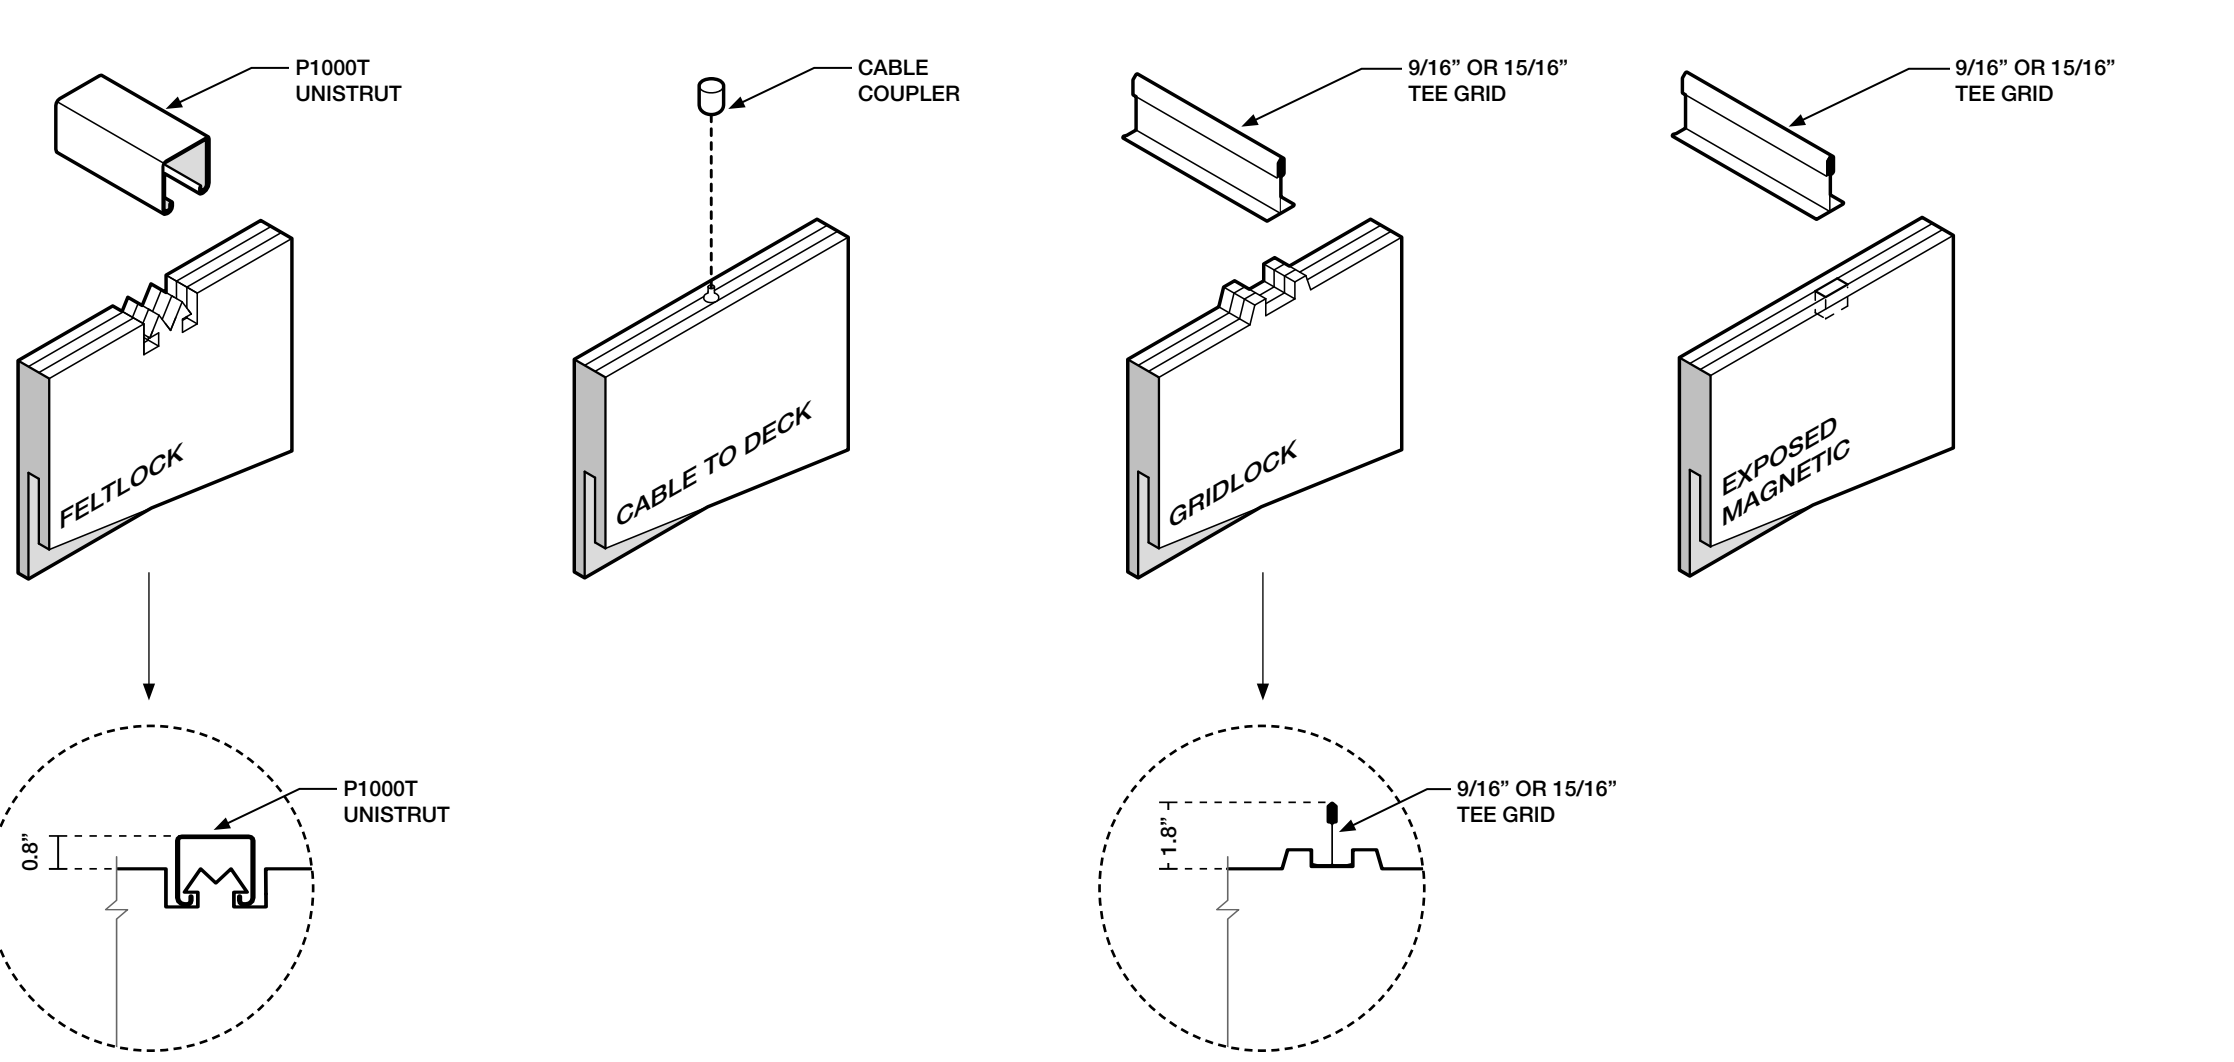

ALL DIMENSIONS NOMINAL UNLESS NOTED OTHERWISE



Alternative Connections

Additional Options

Beyond our standard connections, we offer the following connection options for Doppelganger too.

P1000T Unistrut

Cable to Unistrut
Threaded Rod to Unistrut
Rotated FeltLock


9/16" or 15/16" Tee Grid

Cable to Tee Grid
Embedded Nut to Bolt-Slot
Grid Clip


Miscellaneous

Embedded Nut
Threaded Rod


ALTERNATIVE UNISTRUT CONNECTIONS

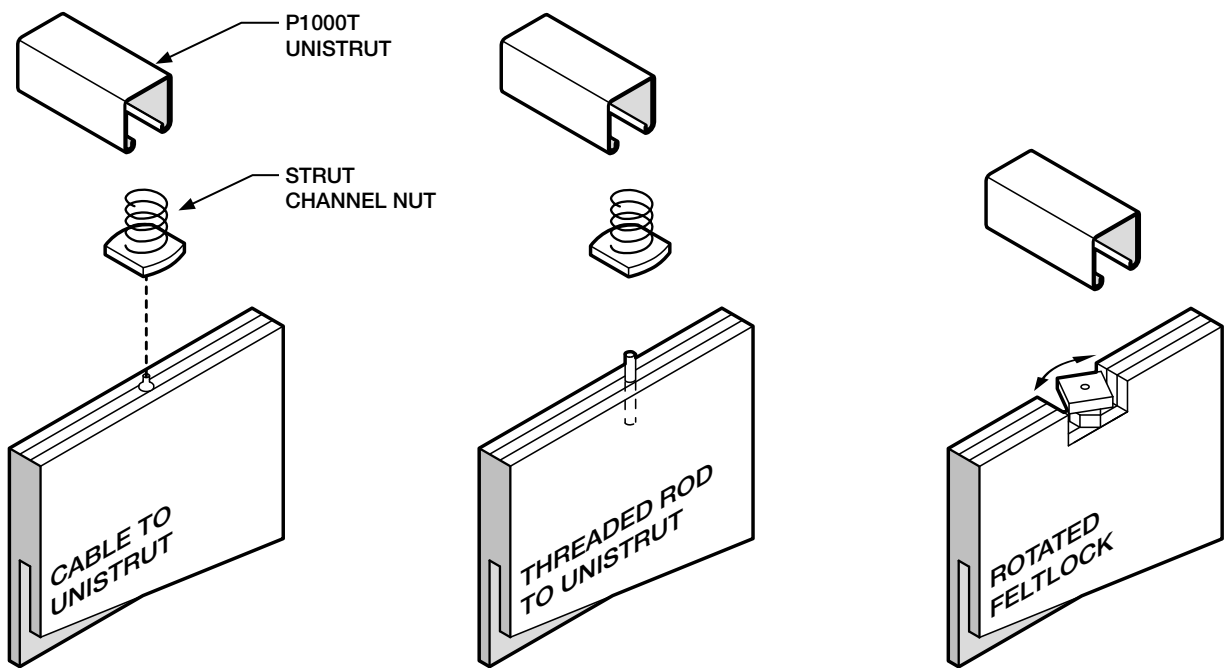

ALTERNATIVE TEE GRID CONNECTIONS

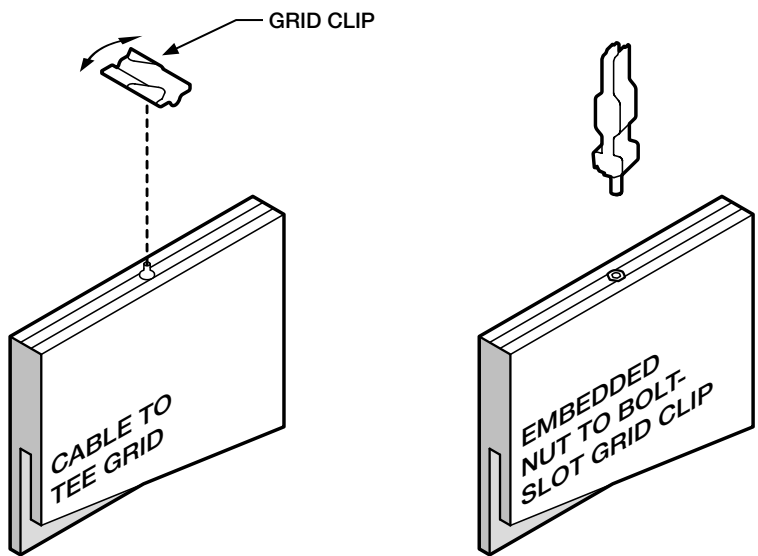

ALTERNATIVE MISCELLANEOUS CONNECTIONS

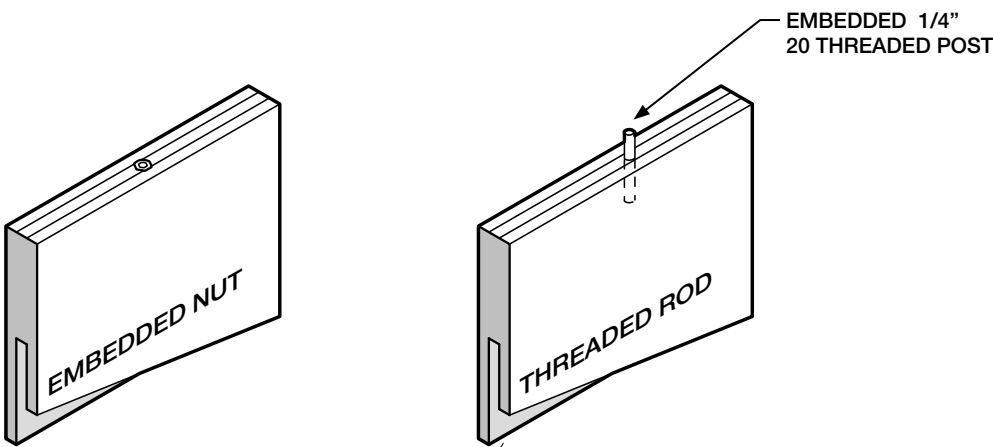

Layout Considerations



- Wall Clearance

Turf recommends a 4" clearance from the wall to our baffles.
- Adjacent Baffle Clearance

Turf recommends a 1" gap between all rows of baffles. This clearance supports a uniform look and build.
- Trim in Field

Doppelganger Baffle ends can be trimmed in field as required.

Please do not trim between baffle connection points or connection pieces.

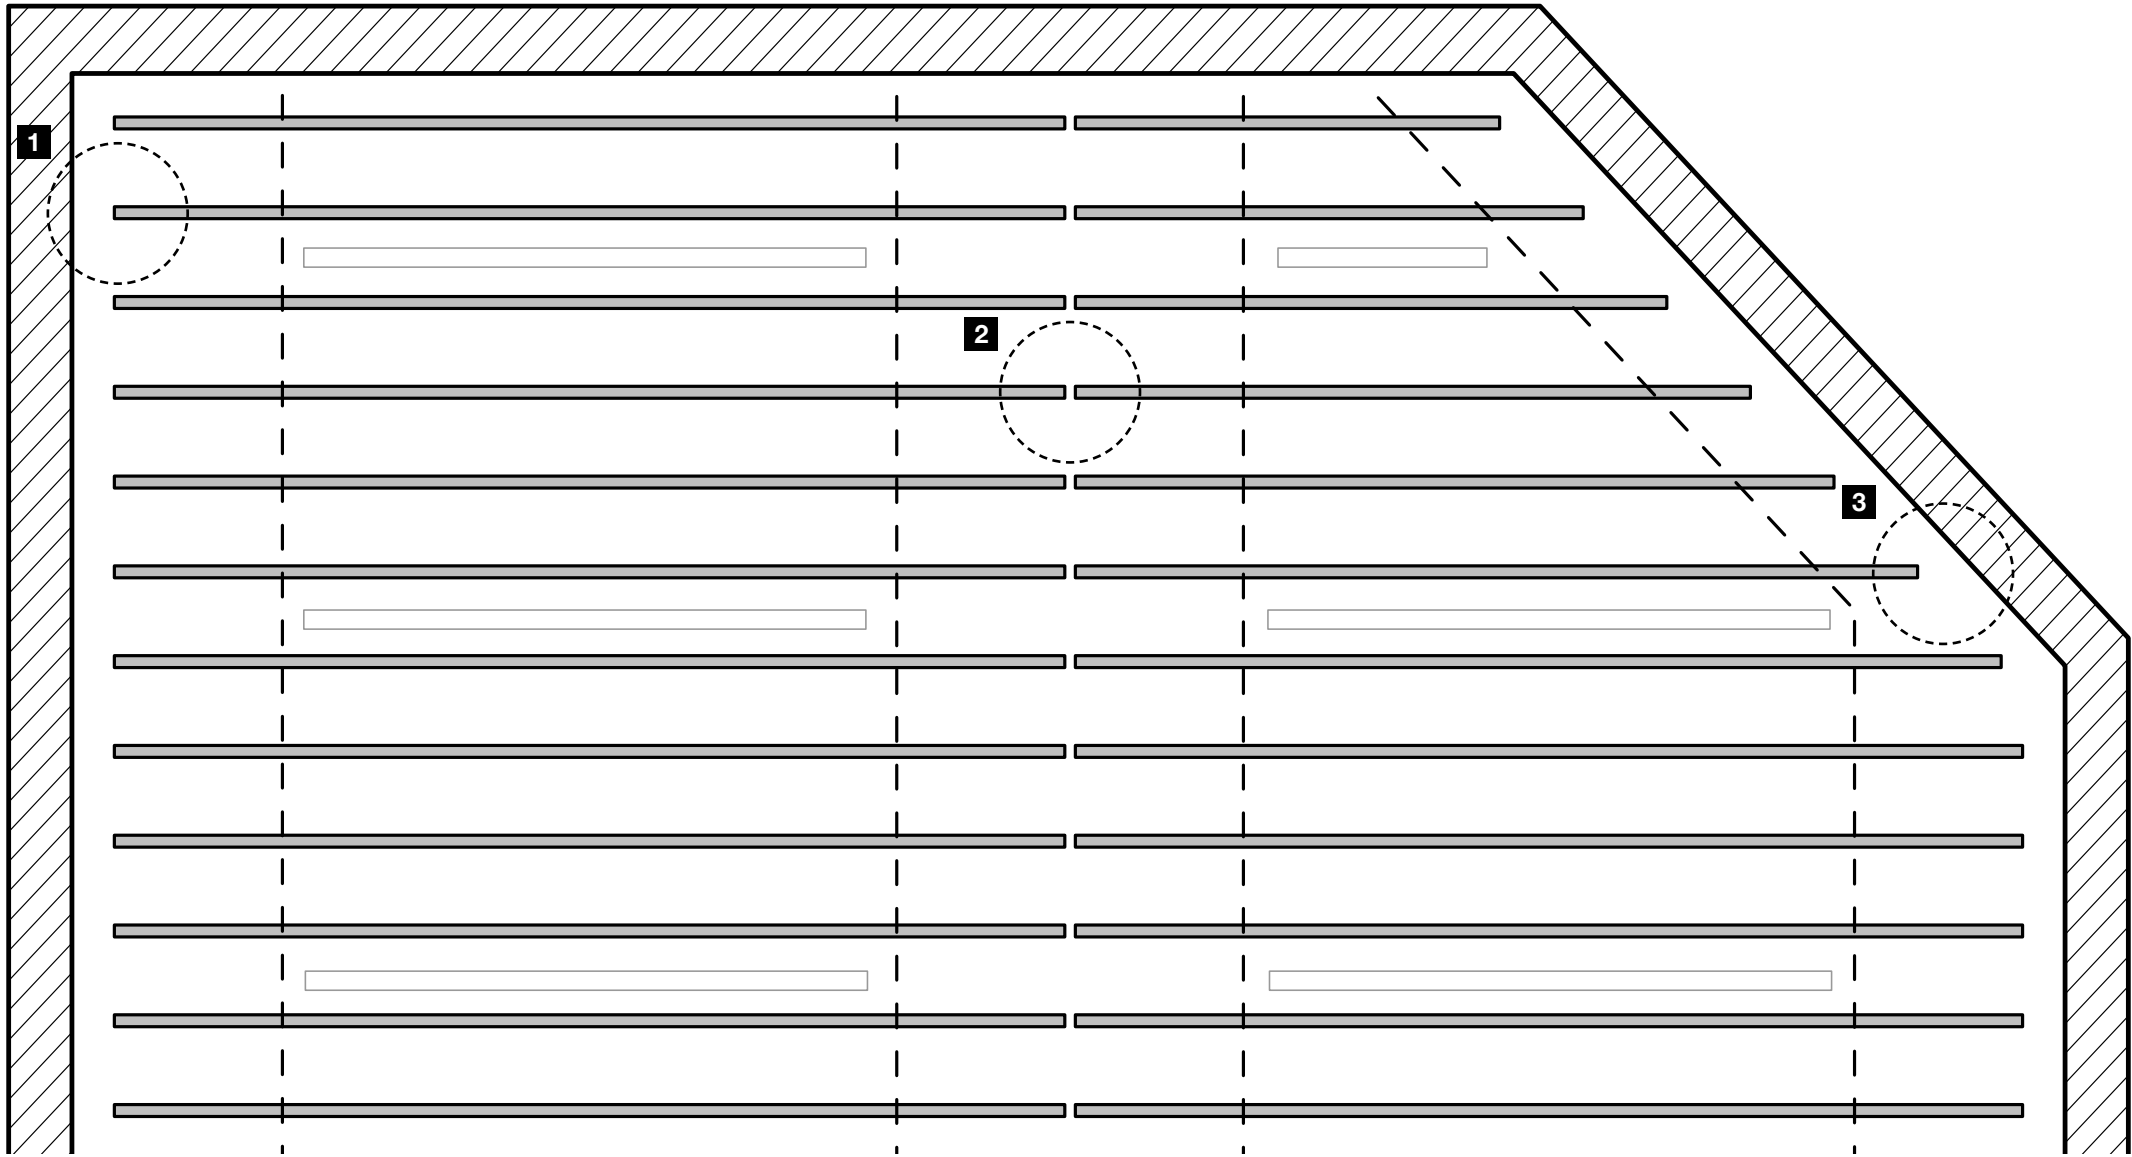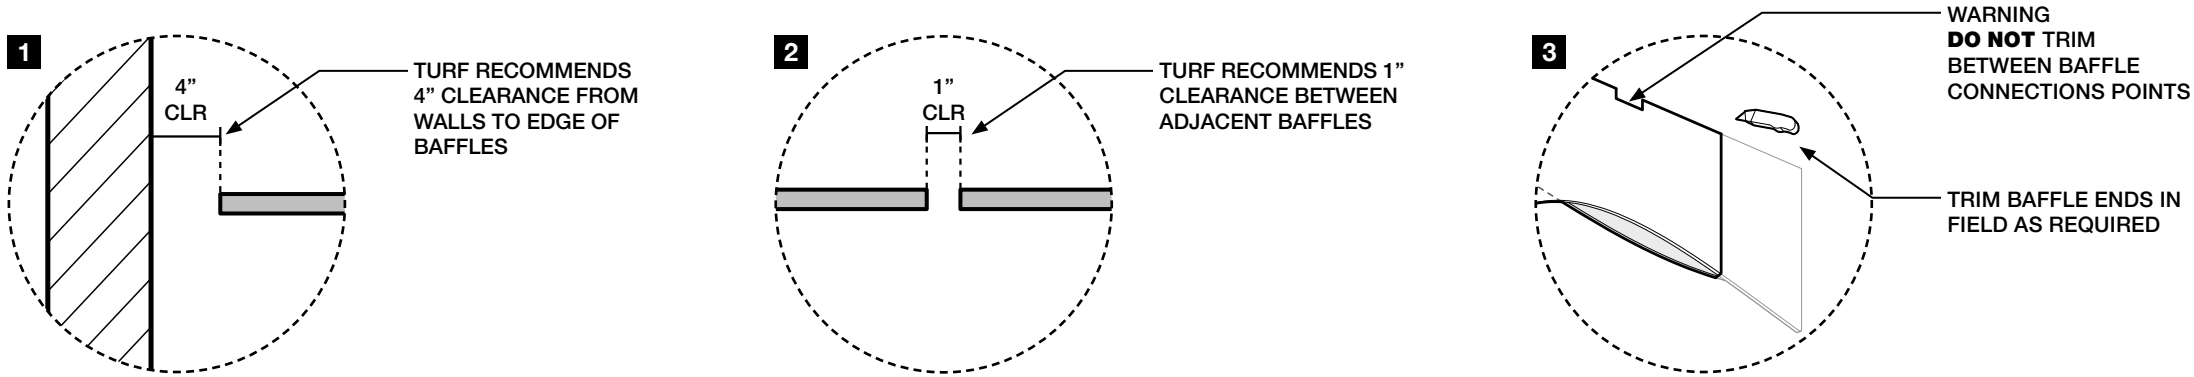

DOPPELGANGER BAFFLE - EXAMPLE RCP



Tech

Acoustics	ASTM C 423-17: Type J
Fire Rating	ASTM E-84 – Class A
VOC	ASTM D5116 Compliant

Details


Lead Time	Check the Turf website for current lead times.
Warranty	Five (5) years
Maintenance	Vacuum to remove any particulate matter and air-borne debris or dust. Compressed air can be used to dust the material in difficult to reach areas for large assemblies. Contact us for more information relative to spot cleaning.
Weight	Turf products cannot support the weight of any other items in field.

Acoustic Rating

Doppelganger Baffle NRC			
Depth	6" OC	8" OC	12" OC
9.375"	1.05	0.95	0.7

The table displays information for an array of sound absorbing baffles suspended by cables, evenly distributed in four rows of four units.

Certifications

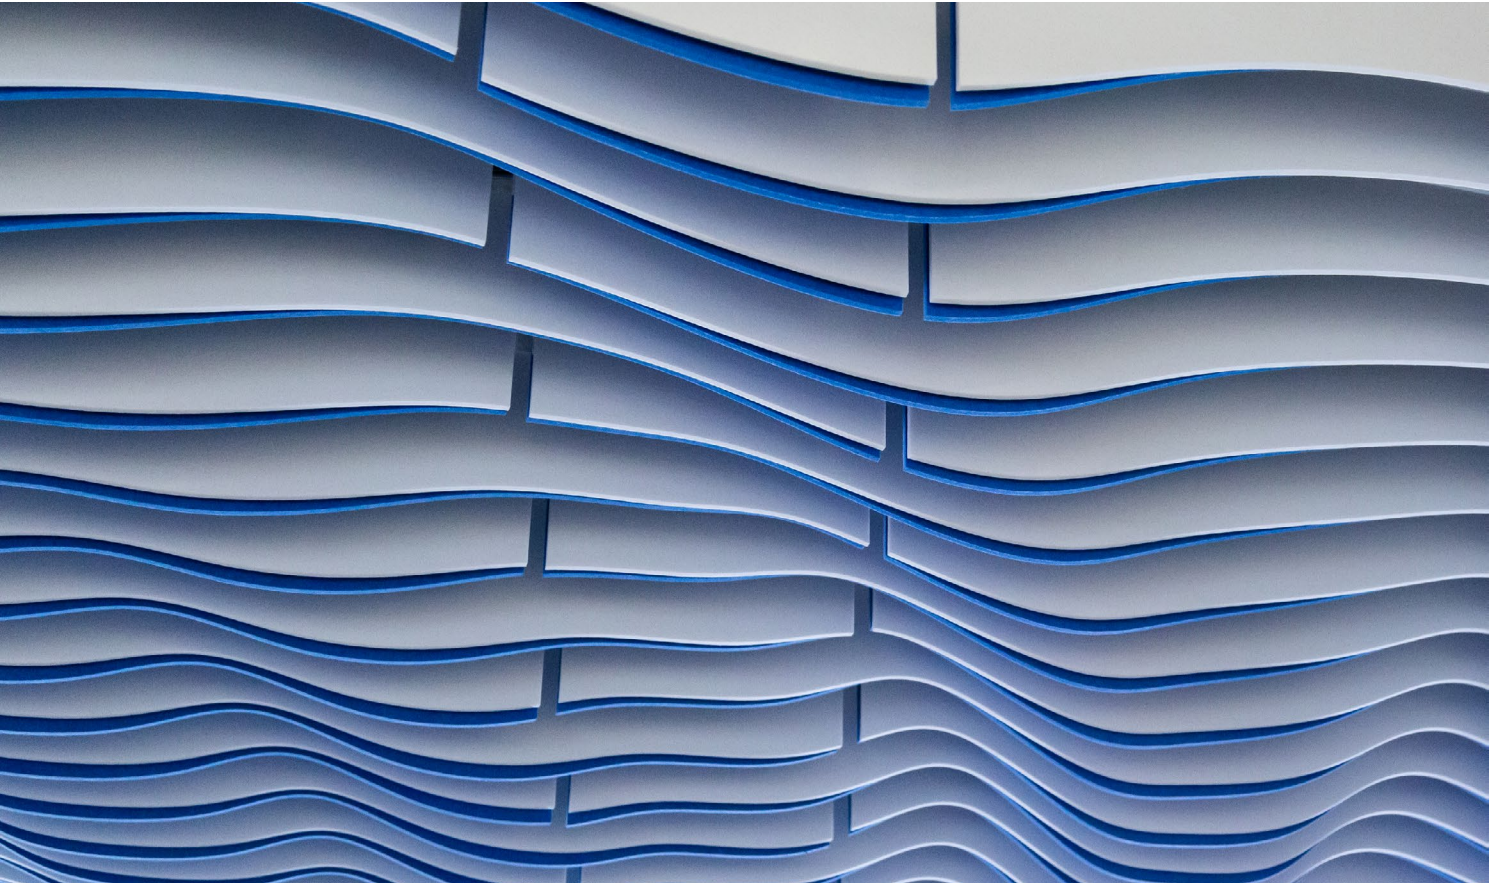

9mm Colors

Introducing Hues, our new 9mm color palette designed for the senses.

The 9mm PET felt board is used as our primary construction material. Select one of our coordinating neutrals to blend in, or go for a contrasting element with one of our hues.

The process used to create PET felt often results in a heathered effect where multiple tones are present. Slight variations in color should be expected when using this sustainable material.

Felt Thickness
9mm +/-0.5 mm

Monitors and printers vary.
Please request a material sample to verify felt colors.



10 TOPO GREEN



12 GRASSHOPPER



11 CELADON



63 SAFFLOWER



64 PLANTAIN



43 ORANGE CRUSH



18 ULTISOL



17 BLUSH



23 RED



15 MERLOT



50 IVORY



33 LUMINARY



83 HOLLAND OATS



82 BARLEY



34 TONAL TAUPE



35 BARK



28 INDIGO



30 CYAN



24 ROYAL BLUE



31 AZURE



27 JEAN JACKET



26 FADED DENIM



40 MAGENTA



41 DRIED LAVENDER



66 PEWTER



05 WHITE



01 CREAM



04 LIGHT GREY



98 STORM



09 DAMASCUS



06 CHARCOAL



07 BLACK

