


FLOW movable screen

Go with the Flow

Separate your space in statement-making style with the Flow Wall — the acoustic wall partition system that's equal parts beauty and brains, with an NRC rating of .85 and original patterns and colors to enhance your design. Easy to order, inexpensive to ship and quick to install, the Flow Wall proves that on-demand acoustic privacy can be a beautiful thing.

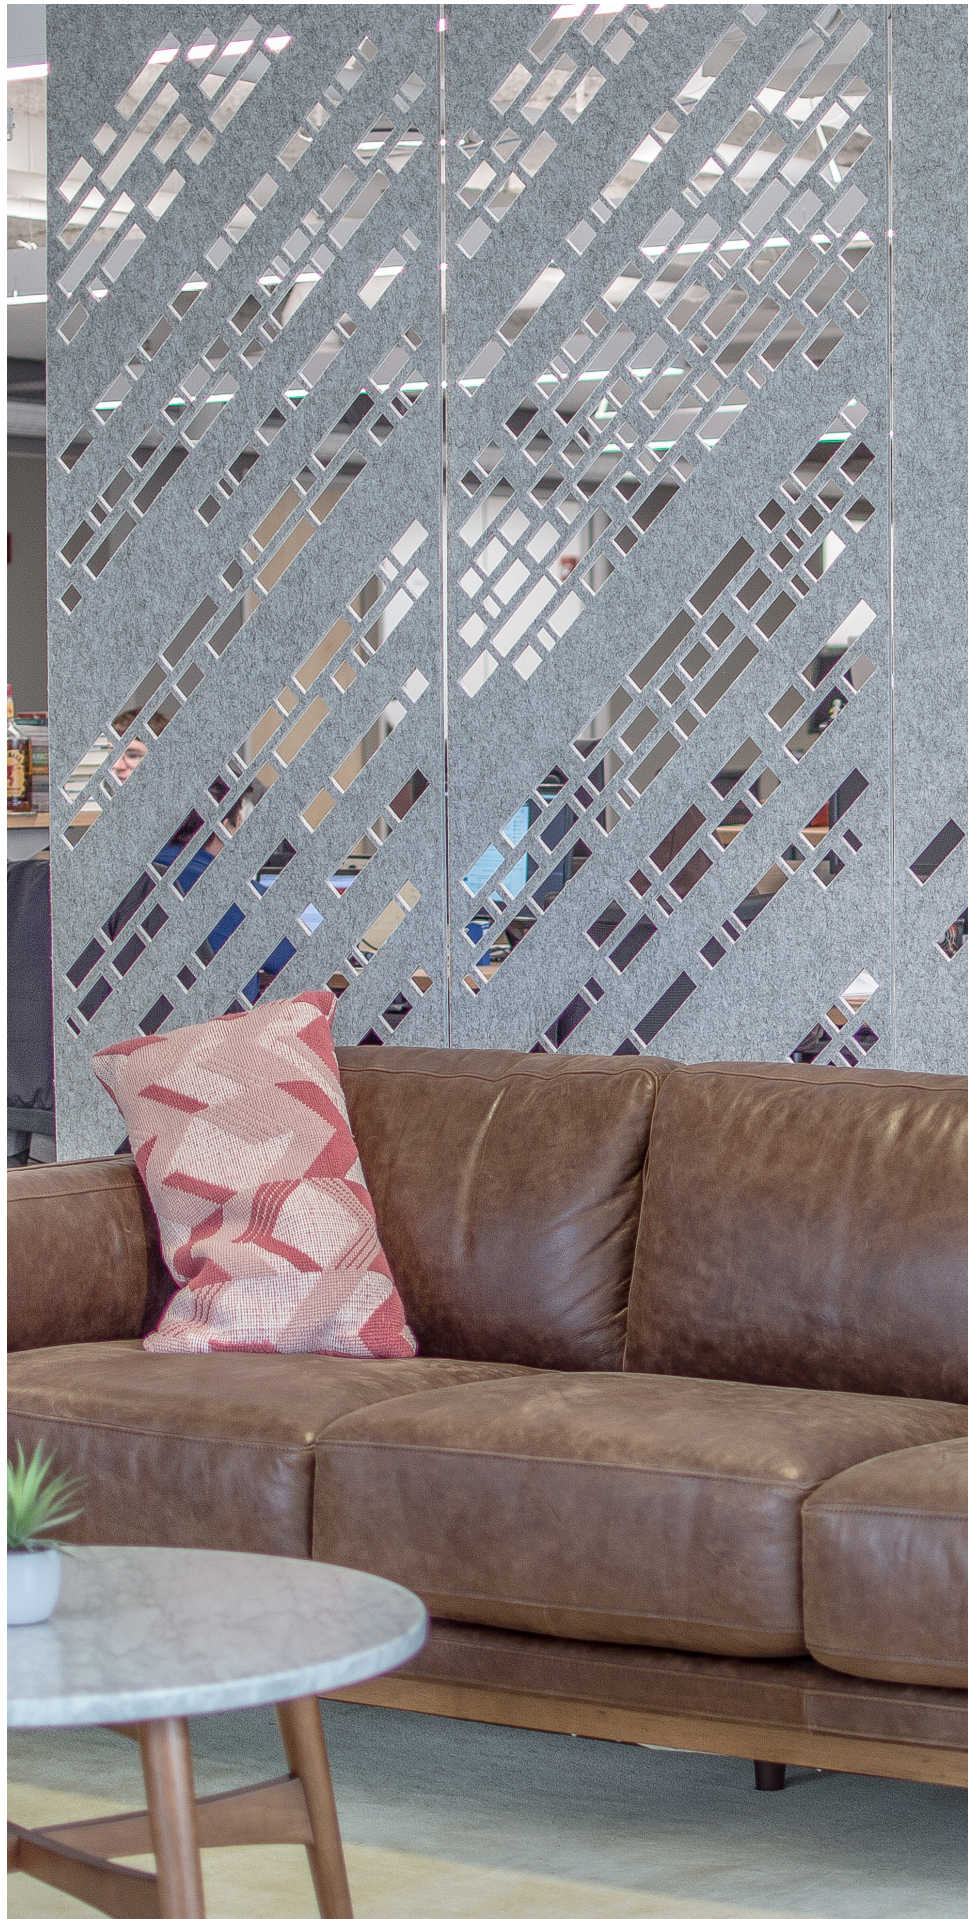

PATENT PENDING

SPECS

PRODUCT
Flow Wall

CONTENT
Polyester (PET) felt
60% pre-consumer recycled

SIZING
Custom is TURF's standard.
Everything is made to order, and
can be adapted to fit unique
spaces.

DIMENSIONS

LENGTH
Varies and is specified in order

INDIVIDUAL PANEL SIZE
Up to 48" x 120"


THICKNESS
9 mm

TRACK WIDTH
3.5"


CONNECTIONS

**ALUMINUM ROLL TRACK
PANEL SYSTEM**
(Supplied by TURF)


Mounting brackets are supplied in
quantities of 1 per 2 linear feet of
channel track.

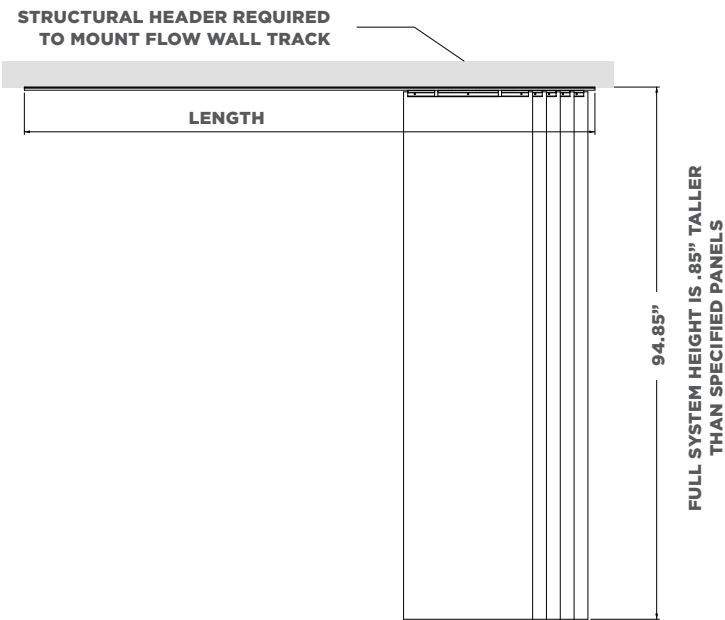

SIDE TRACK DETAIL

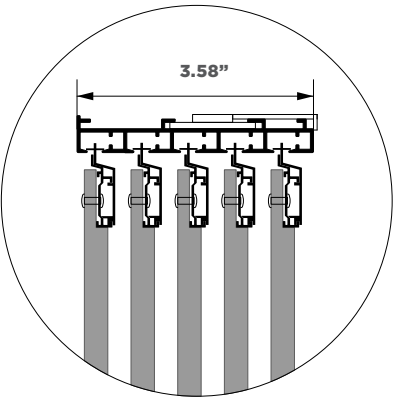


**5 FLOW WALL PANELS W/
EMBEDDED HANGER TRACK**

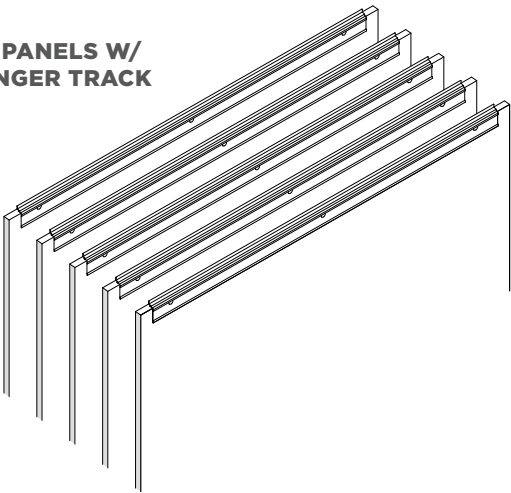

PATTERNS

FRONT ELEVATION

Patterns shown will be modified to fit the size of the panels ordered.
Pattern will fill pattern area.

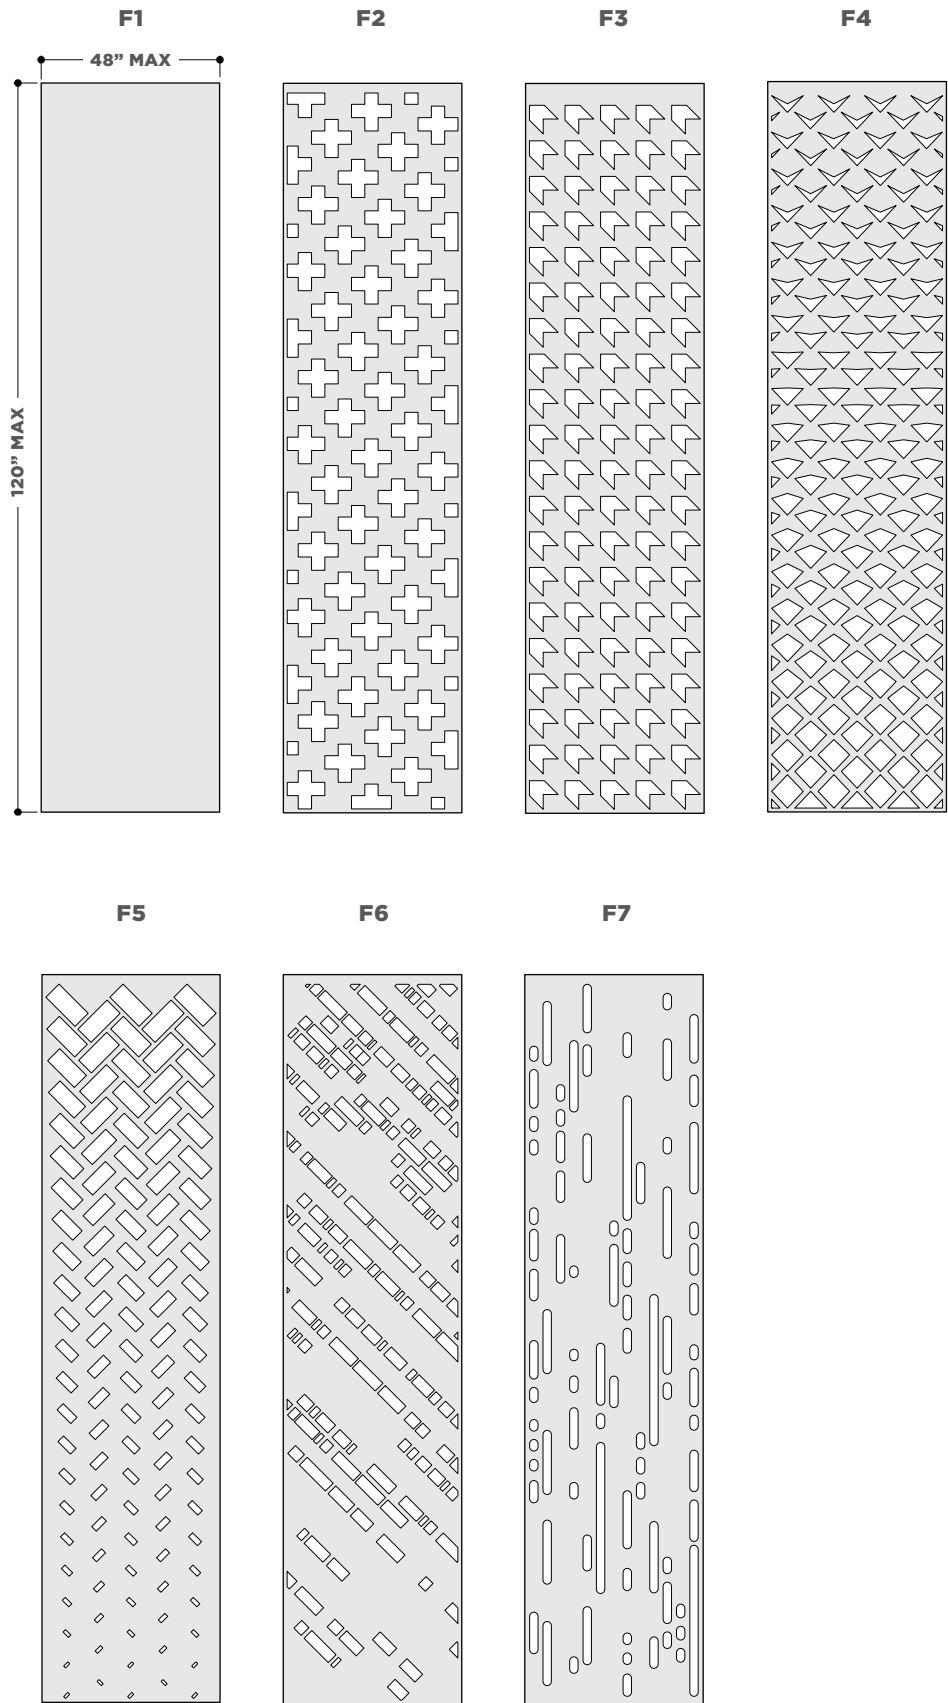

9MM FELT

This product is made with 9 mm PET felt board. The process used to create PET felt often results in a heathered effect where multiple tones are present. Slight variations in color should be expected when using this sustainable material.

Felt thickness is 9 mm +/- 0.5 mm.


Monitors and printers vary. Please request a material sample to verify felt colors.

Looking for the old color palette?

Old colors are still available for legacy projects, but check with us for availability if you're interested in using them for new projects.




07 BLACK




06 CHARCOAL




09 DAMASCUS




98 STORM




04 LIGHT GREY



66 PEWTER



50 IVORY



01 CREAM



33 LUMINARY



05 WHITE




35 BARK




34 TONAL TAUPE



82 BARLEY




83 HOLLAND OATS




24 ROYAL BLUE




10 TOPO GREEN




12 GRASSHOPPER




11 CELADON




40 MAGENTA




41 DRIED LAVENDER




28 INDIGO



30 CYAN



31 AZURE




27 JEAN JACKET




26 FADED DENIM




23 RED



15 MERLOT



18 ULTISOL



17 BLUSH



43 ORANGE CRUSH



63 SAFFLOWER



64 PLANTAIN

TECH

ACOUSTICS

ASTM C423-17: Type J Mounting

FIRE RATING

ASTM E-84 – Class A

VOC

ASTM D5116 Compliant

DETAILS

DURABILITY

Contract

LEAD TIME


Check the Turf website for current lead times.

WARRANTY

Three (3) years

MAINTENANCE

Vacuum to remove any particulate matter and air-borne debris or dust. Compressed air can be used to dust the material in difficult to reach areas for large assemblies. Contact us for more information relative to spot cleaning.

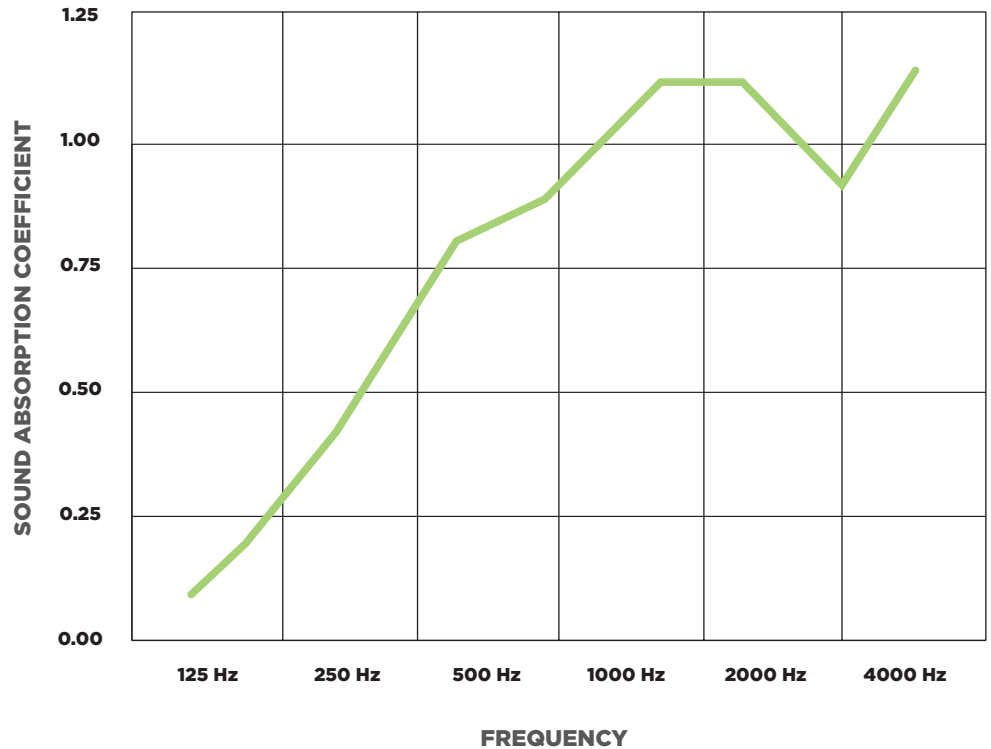

A20-254 NRC = .50

ASTM C 423-17: Type J Mounting: The specimen is an array of spaced sound absorbing baffles suspended from a cable approximately 1206.5mm (47.5 in.) above the horizontal test surface. This approximates the mounting method of a typical ceiling baffle installation. The baffles were evenly distributed in four rows four units each. Baffles were spaced 305 (12 in.) apart. Rows were spaced 762mm (30 in. apart)

