

Carved Wall Tile

Slash

Better sound ahead

All signs point to quieter spaces with Slash. The tile's signature backward and forward "slash" motif forms chevrons or diagonal stripes. Apply color to add a playful touch to these show-stopping, echo-dropping walls.



Image by Blaque

How To Specify

Key Information

Slash can navigate your space in a variety of ways. Consider these questions as you design your layout.

If shop drawings are required for your project, please follow steps 1 - 5.

Fast Track


If you're looking to expedite your project, this product is available as Turf Fast Track!

Using Fast Track, our standard lead time for shop drawings is eliminated allowing the project to move directly into production.

Please note, installation and seaming drawings are not included in this process.

Turf recommends 10-15% additional tiles to cover overage / attic stock.

1

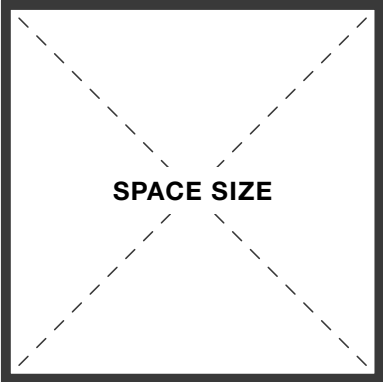


SPACE SIZE

What are the dimensions of the space?

PAGE 4

2

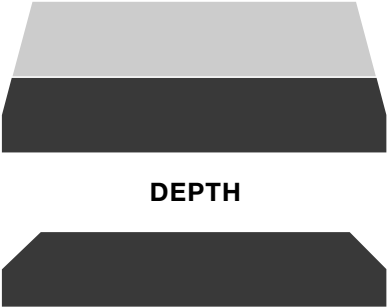


DEPTH

9mm or 18mm depth?

PAGE 3

3

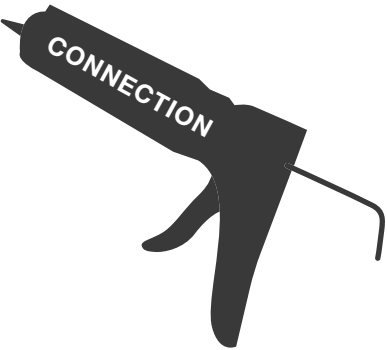


CONNECTION

Will Slash need adhesive backing or non-adhesive?

PAGE 3

4

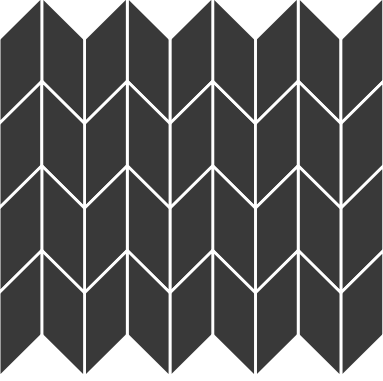


LAYOUT

What is the proposed layout?

PAGE 4

5

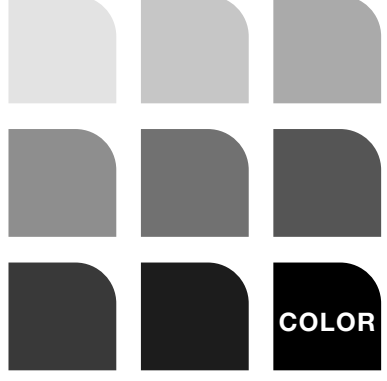

COLOR

What is the color or texture?

PAGE 7-8



FAST TRACK

1. 9mm or 18mm depth?
2. Do you want adhesive backing by Turf, or construction adhesive by others?
3. Do you want Forward Slash, Backslash or both?
4. What is the color of the tiles?
5. How many tiles do you need?
6. Do you want to include any additional product for overage or attic stock?



Dimensions




Standard Tiles	6"W x 18"L
Standard Depth	9mm, 18mm
Tile Types	Forward Slash, Backslash See our Typical Layouts pages for more information on tiles.

Connection Options

Standard Connection	Adhesive backing by Turf
Connection By Others	Construction adhesive Tiles can be installed with construction grade adhesive specified by the contractor.

Color

9mm Palette	Slash can be specified in any of our 9mm felt colors or Stone Textures. See Section Details on this page for more information.
-------------	---

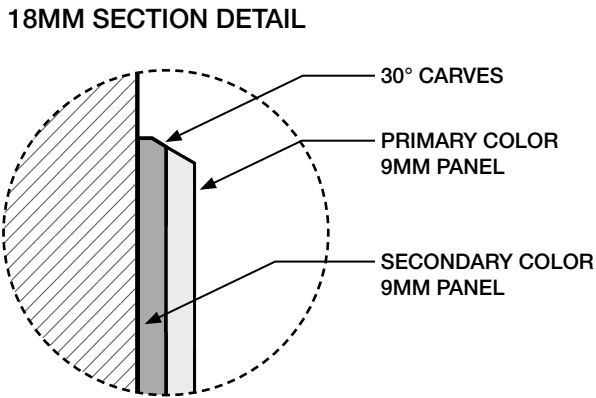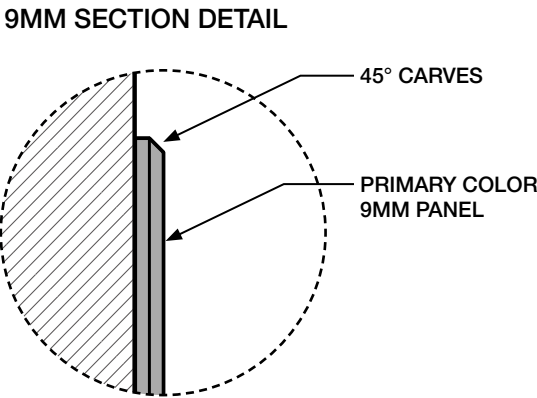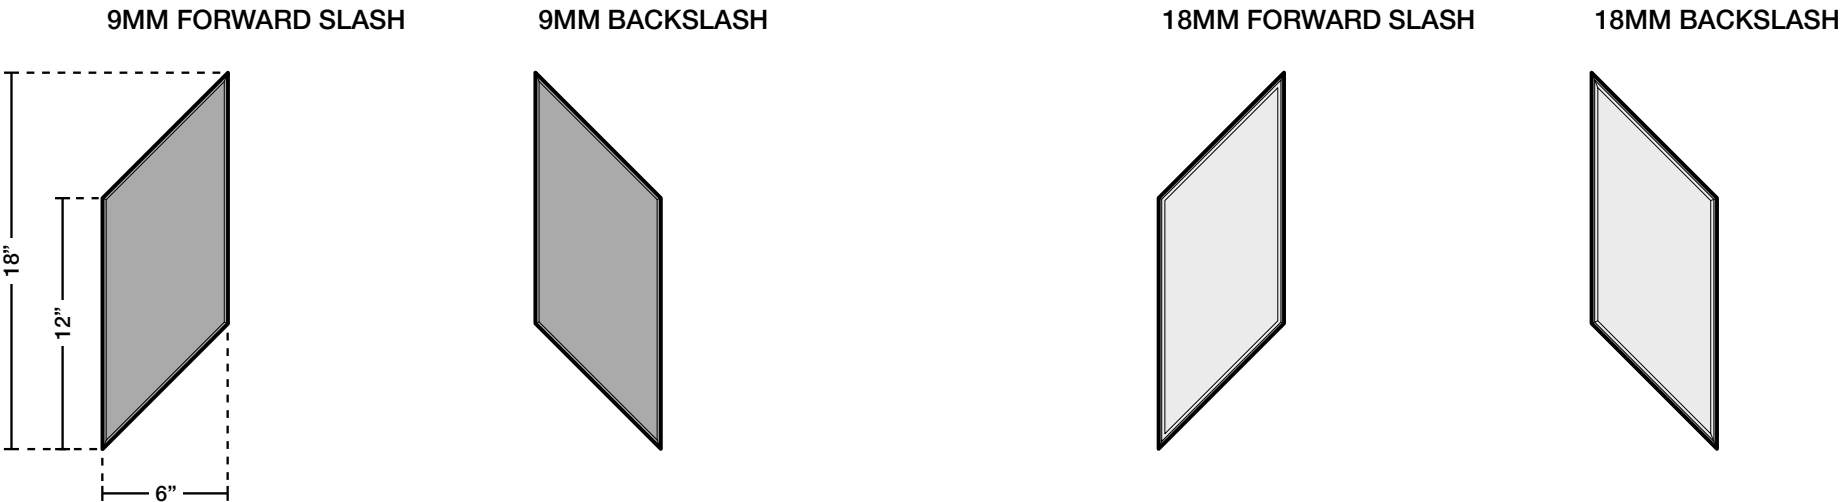


ALL DIMENSIONS NOMINAL UNLESS NOTED OTHERWISE



Typical Layouts


Uniform Vertical

Diagonal, vertical strokes sit together in Slash's Uniform layout. Choose multiple color options to make forward motion.

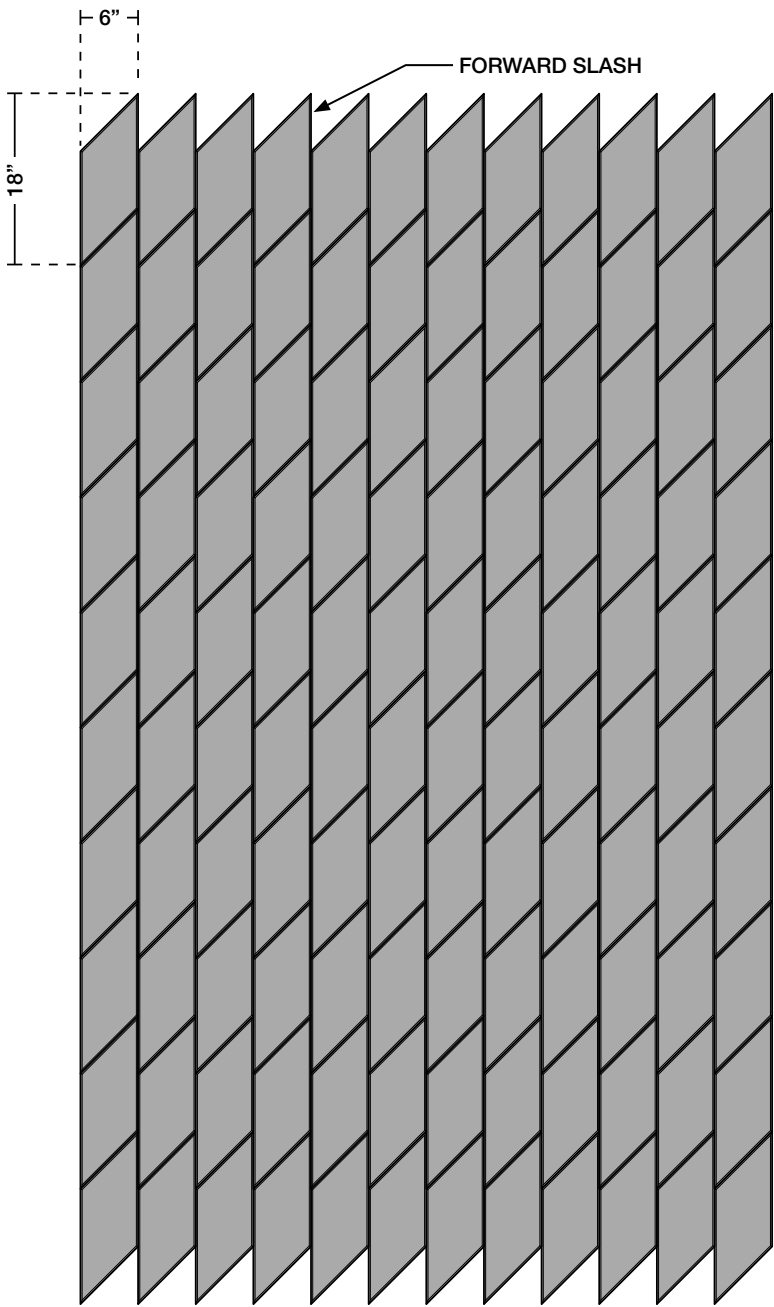


Mix Vertical

Vertical chevrons run up and down in Slash's Mix Vertical layout. Choose multiple color options and see Slash flow.

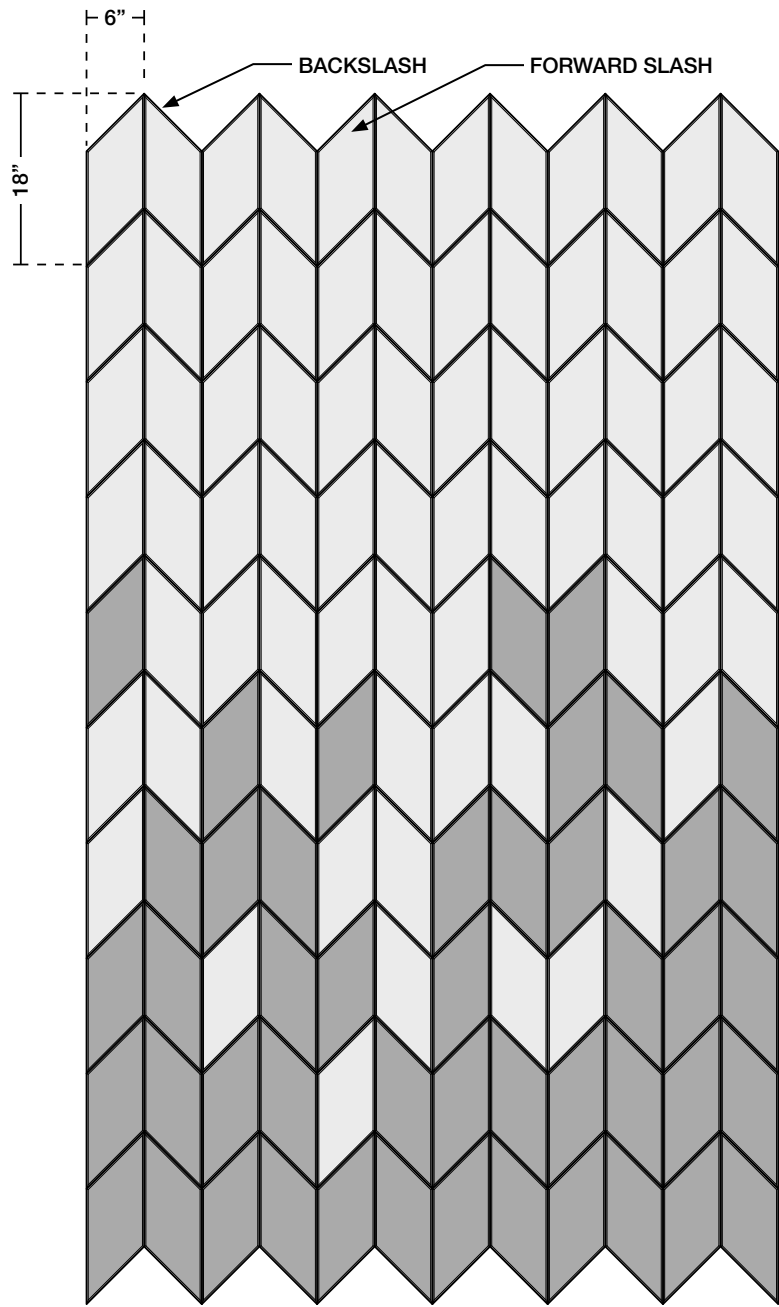

Mix Horizontal

Horizontal chevrons cut across Slash's Mix Horizontal layout. Choose multiple color options and point people through your space.

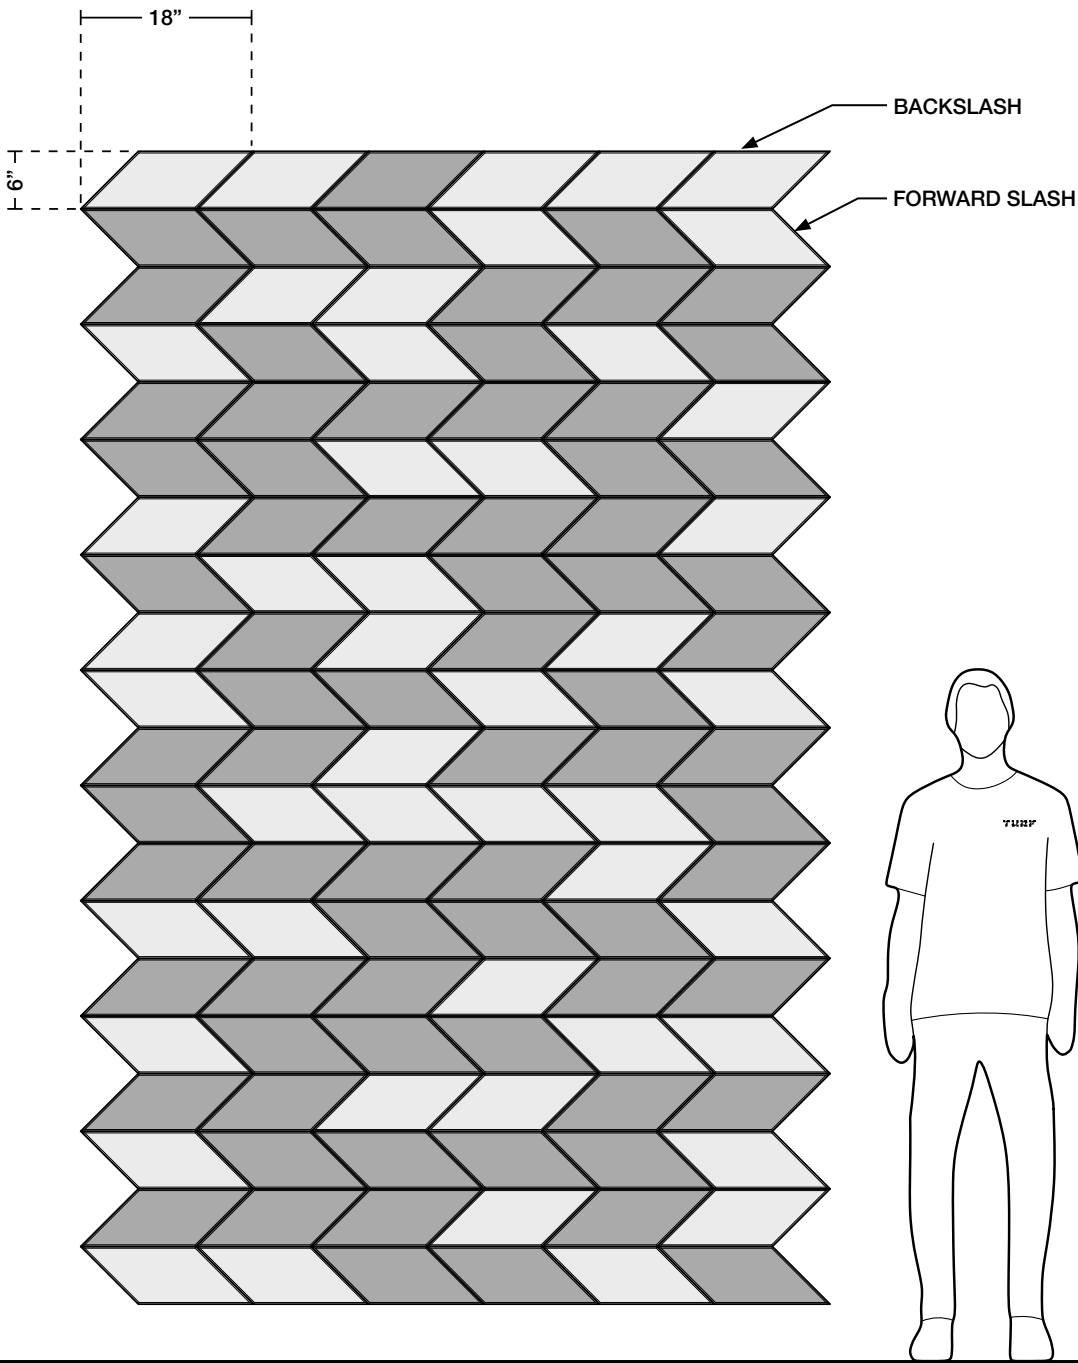

ALL DIMENSIONS NOMINAL UNLESS NOTED OTHERWISE

Installation & Field Trim Guide

Slash is designed for a quick and easily install, and can accommodate trimming in field — just follow this simple guide.


This guide shows Slash with Turf applied adhesive backing. Alternatively tiles can be installed with construction grade adhesive specified by the contractor.

Please note, prep the wall surface before application. Clean the surface of any dust or loose debris, making sure the surface is dry before application.


Follow the link below for more detailed information on adhering Turf products to walls.

[Turf Adhesives Guide](#)


Tools Required




SHARP BLADE



STRAIGHT
EDGE




DRILL




HOLE SAW


1 - ADHESIVE BACKING BY TURF

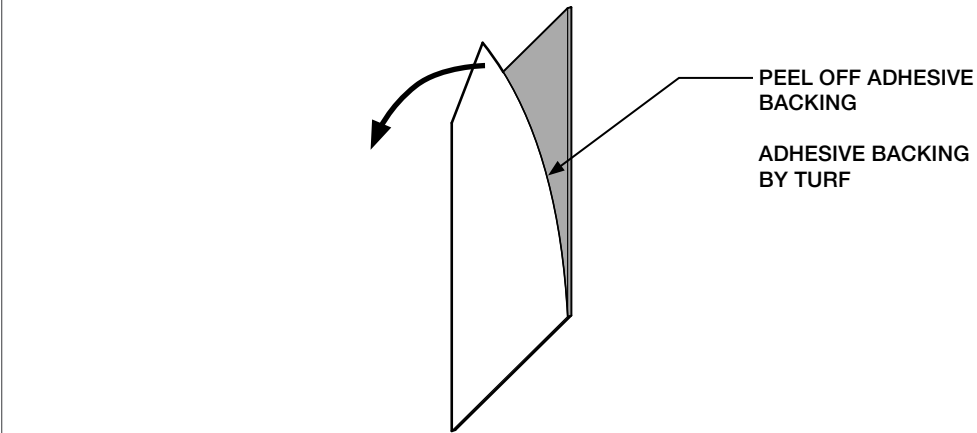


2 - MOUNT SLASH TO WALL

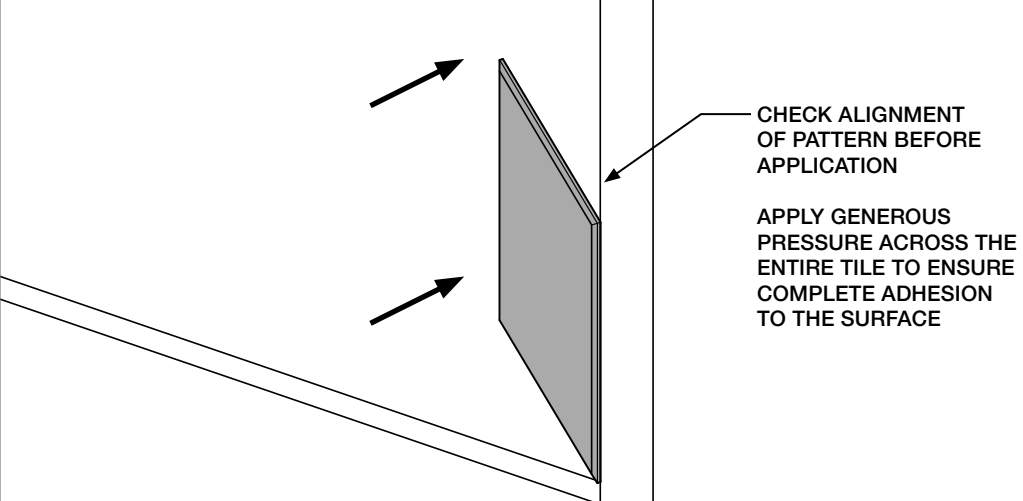

3 - TRIM AS REQUIRED

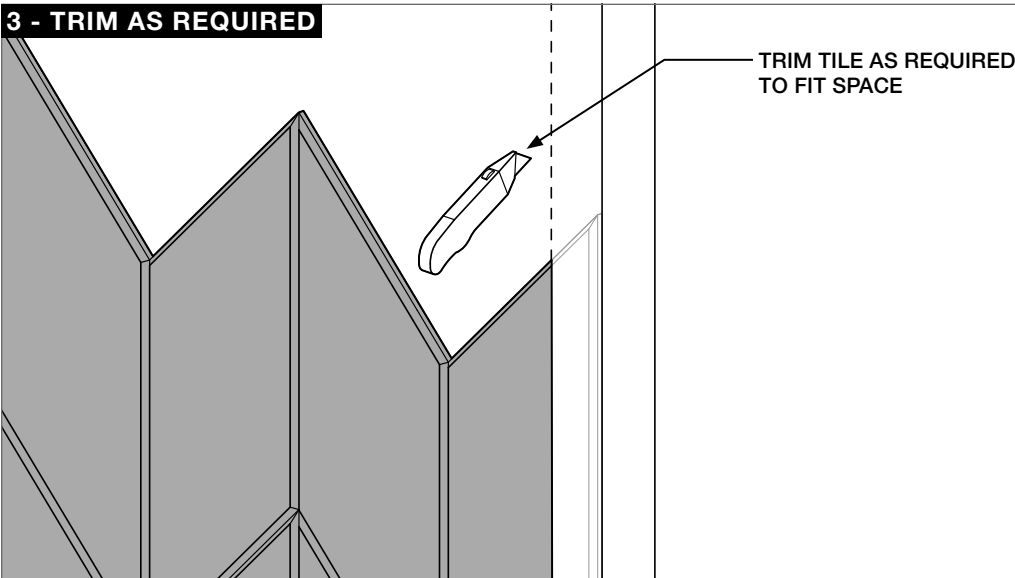

4 - TRIM CIRCULAR HOLES

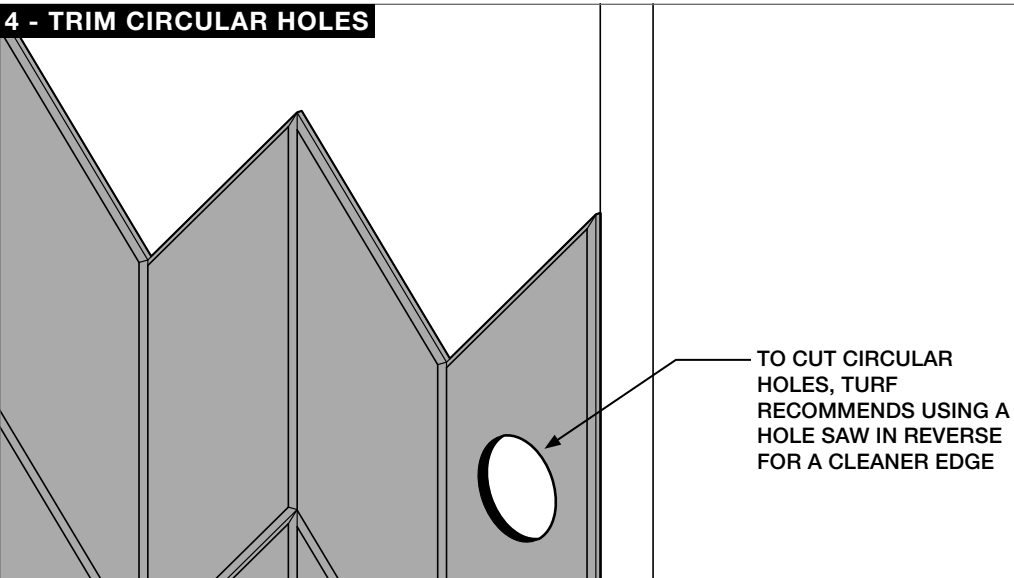

Tech

Acoustics	ASTM C 423-17: Type A
Fire Rating	ASTM E-84 – Class A
VOC	ASTM D5116 Compliant

Details

Lead Time	Check the Turf website for current lead times.
Warranty	Five (5) years
Maintenance	Vacuum to remove any particulate matter and air-borne debris or dust. Compressed air can be used to dust the material in difficult to reach areas for large assemblies. Contact us for more information relative to spot cleaning.
Attachments	Turf products are not designed to support the weight of other objects or fixtures.

Acoustic Rating

9mm Tile	NRC = 0.25
18mm Tile	NRC = 0.40
	Carved wall tile NRC varies depending on field conditions and arrangement. Contact Turf for testing details.

Certifications



Photo by Brandon Stengel, Farm Kid Studios



Image by Blaque Studio



9mm Colors

Introducing Hues, our new 9mm color palette designed for the senses.

The 9mm PET felt board is used as our primary construction material. Select one of our coordinating neutrals to blend in, or go for a contrasting element with one of our hues.

The process used to create PET felt often results in a heathered effect where multiple tones are present. Slight variations in color should be expected when using this sustainable material.

Felt Thickness
9mm +/-0.5 mm

Monitors and printers vary.
Please request a material sample to verify felt colors.




10 TOPO GREEN




12 GRASSHOPPER




11 CELADON




63 SAFFLOWER



64 PLANTAIN




43 ORANGE CRUSH




18 ULTISOL



17 BLUSH



23 RED



15 MERLOT



50 IVORY



33 LUMINARY



83 HOLLAND OATS




82 BARLEY




34 TONAL TAUPE




35 BARK




28 INDIGO




30 CYAN




24 ROYAL BLUE



31 AZURE




27 JEAN JACKET




26 FADED DENIM



40 MAGENTA




41 DRIED LAVENDER




66 PEWTER



05 WHITE




01 CREAM




04 LIGHT GREY



98 STORM



09 DAMASCUS



06 CHARCOAL



07 BLACK



9mm Stone Textures


Inspired by nature, designed for felt. Our digitally printed Stone Textures capture the character and nuance of stone on top of a curated color collection from our Hues palette with virtually no repeats. The three patterns in this family each capture unique elements from the stones for which they are named.

There is an additional product cost for Stone Textures.

Turf has curated this collection to include only the best pattern and color combinations.

Felt Thickness
9mm +/-0.5 mm


Monitors and printers vary.
Please request a material sample to verify felt colors.




Texture Edge Detail

Please note, all cut edges will reveal the base color of the felt if using a 9mm Stone Texture.


ST34 Granite used as an example above.

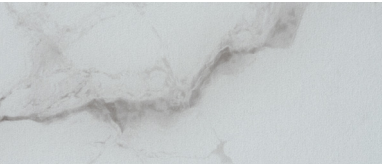


ST05 MARBLE

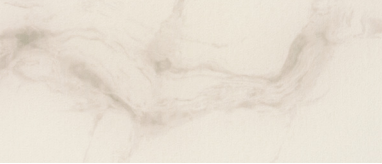


ST50 MARBLE

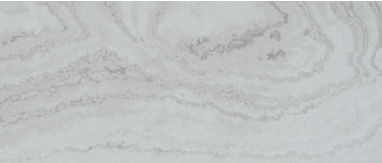


ST05 TRAVERTINE

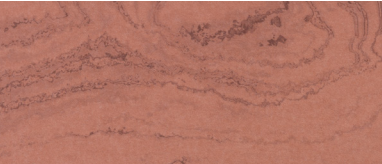


ST17 TRAVERTINE

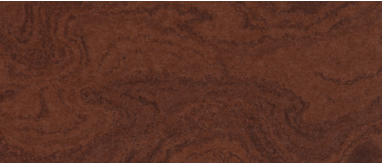


ST18 TRAVERTINE

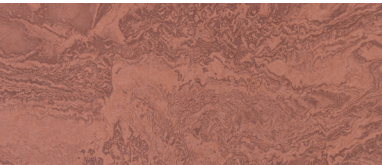

ST17 GRANITE

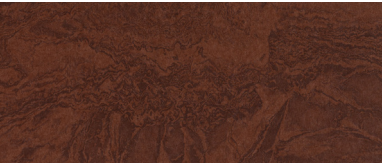


ST18 GRANITE

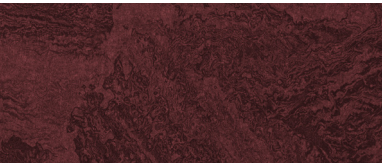


ST15 GRANITE



ST01 MARBLE

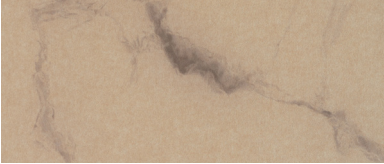


ST83 MARBLE

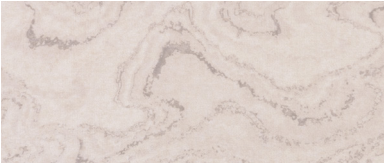

ST01 TRAVERTINE




ST83 TRAVERTINE

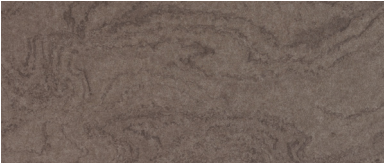


ST34 TRAVERTINE




ST34 GRANITE

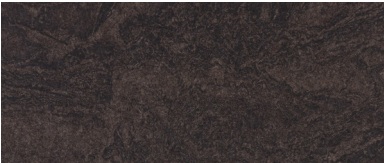


ST35 GRANITE

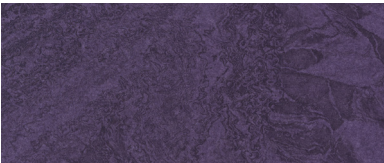

ST41 GRANITE

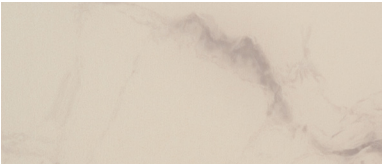


ST33 MARBLE

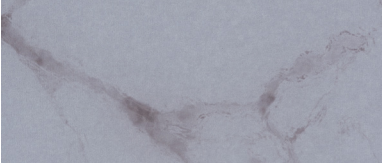


ST66 MARBLE




ST50 TRAVERTINE

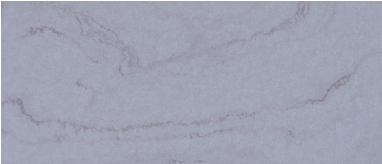


ST66 TRAVERTINE

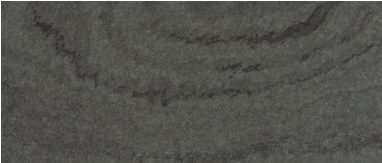


ST11 TRAVERTINE

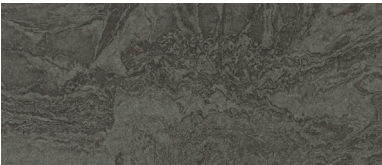


ST11 GRANITE

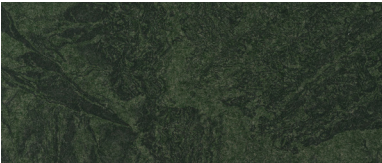


ST10 GRANITE

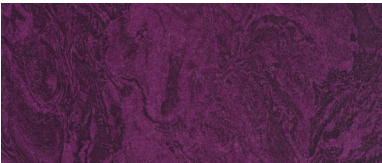


ST40 GRANITE

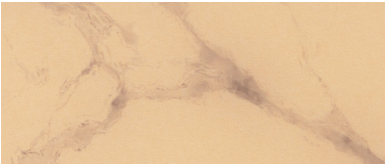


ST64 MARBLE

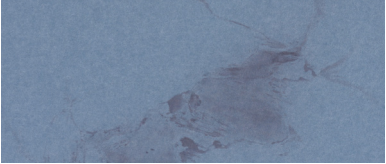


ST26 MARBLE

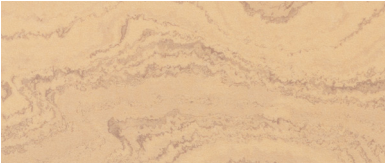


ST64 TRAVERTINE

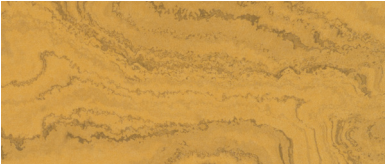

ST63 TRAVERTINE

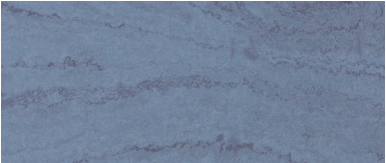

ST26 TRAVERTINE

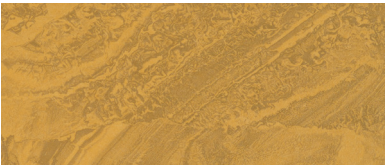

ST63 GRANITE



ST28 GRANITE