

Carved Wall Tile

Hive

Buzzworthy acoustics at work

Six-figured shapes work together to create sound-cushioning clusters. Damping busy sonic environments, Hive comes in an array of colors, with beveled edges adding subtle dimensionality to its iconic hexagonal form.



Image by The Right Exposure

How To Specify

Key Information

Hive can cluster through your space in a variety of ways. Consider these questions as you design your layout.

If shop drawings are required for your project, please follow steps 1 - 5.

Quick Ship


If you're looking to expedite your project, this product is available as Turf Quick Ship!

Using Quick Ship, our standard lead time for shop drawings is eliminated allowing the project to move directly into production.

Please note, installation and seaming drawings are not included in this process.

Turf recommends 10-15% additional tiles to cover overage / attic stock.

1

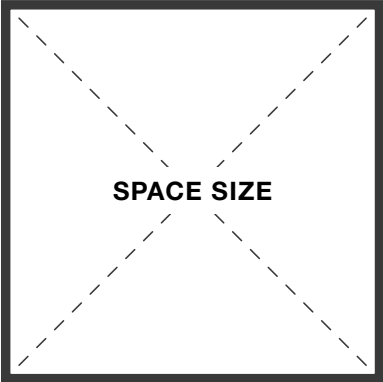


SPACE SIZE

What are the dimensions of the space?

PAGE 3

2

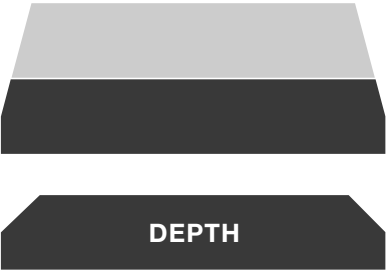


DEPTH

9mm or 18mm depth?

PAGE 3

3

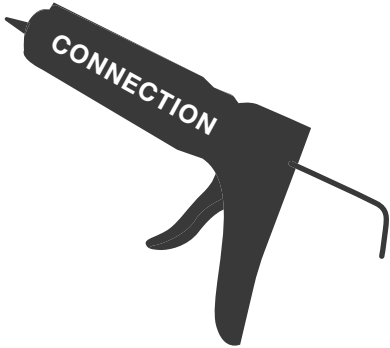


CONNECTION

Will Hive need adhesive backing or non-adhesive?

PAGE 3

4

LAYOUT

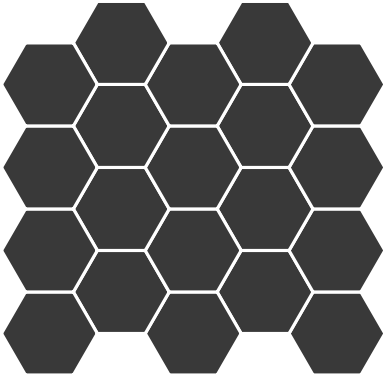


LAYOUT

What is the proposed layout?

PAGE 3


5



COLOR

What is the color?

PAGE 6



QUICK SHIP

1. 9mm or 18mm depth?
2. Do you want adhesive backing by Turf, or construction adhesive by others?
3. What is the color of the tiles?
4. How many tiles do you need?
5. Do you need any Hex tiles to coordinate with your design?
6. Do you want to include any additional product for overage or attic stock?

Dimensions

Standard Tiles	11.75"W x 13.5"L
Standard Depth	9mm, 18mm

Connection Options


Standard Connection	Adhesive backing by Turf
Connection By Others	Construction adhesive
	Tiles can be installed with construction grade adhesive specified by the contractor.

Color

9mm Palette	Hive can be specified in any of our 9mm felt colors.
	See Section Details on this page for more information.

Typical Layouts

Horizontal	Hexagon forms sit side by side, running horizontally, in Hive's Horizontal layout.
Vertical	Hexagon forms sit side by side, running vertically, in Hive's Vertical layout.
Combination	Combine Hive with Hex tiles to create a 3D apiary effect in Hive's Combination layout.
	See Hex cut sheet on Turf's website for detailed information.

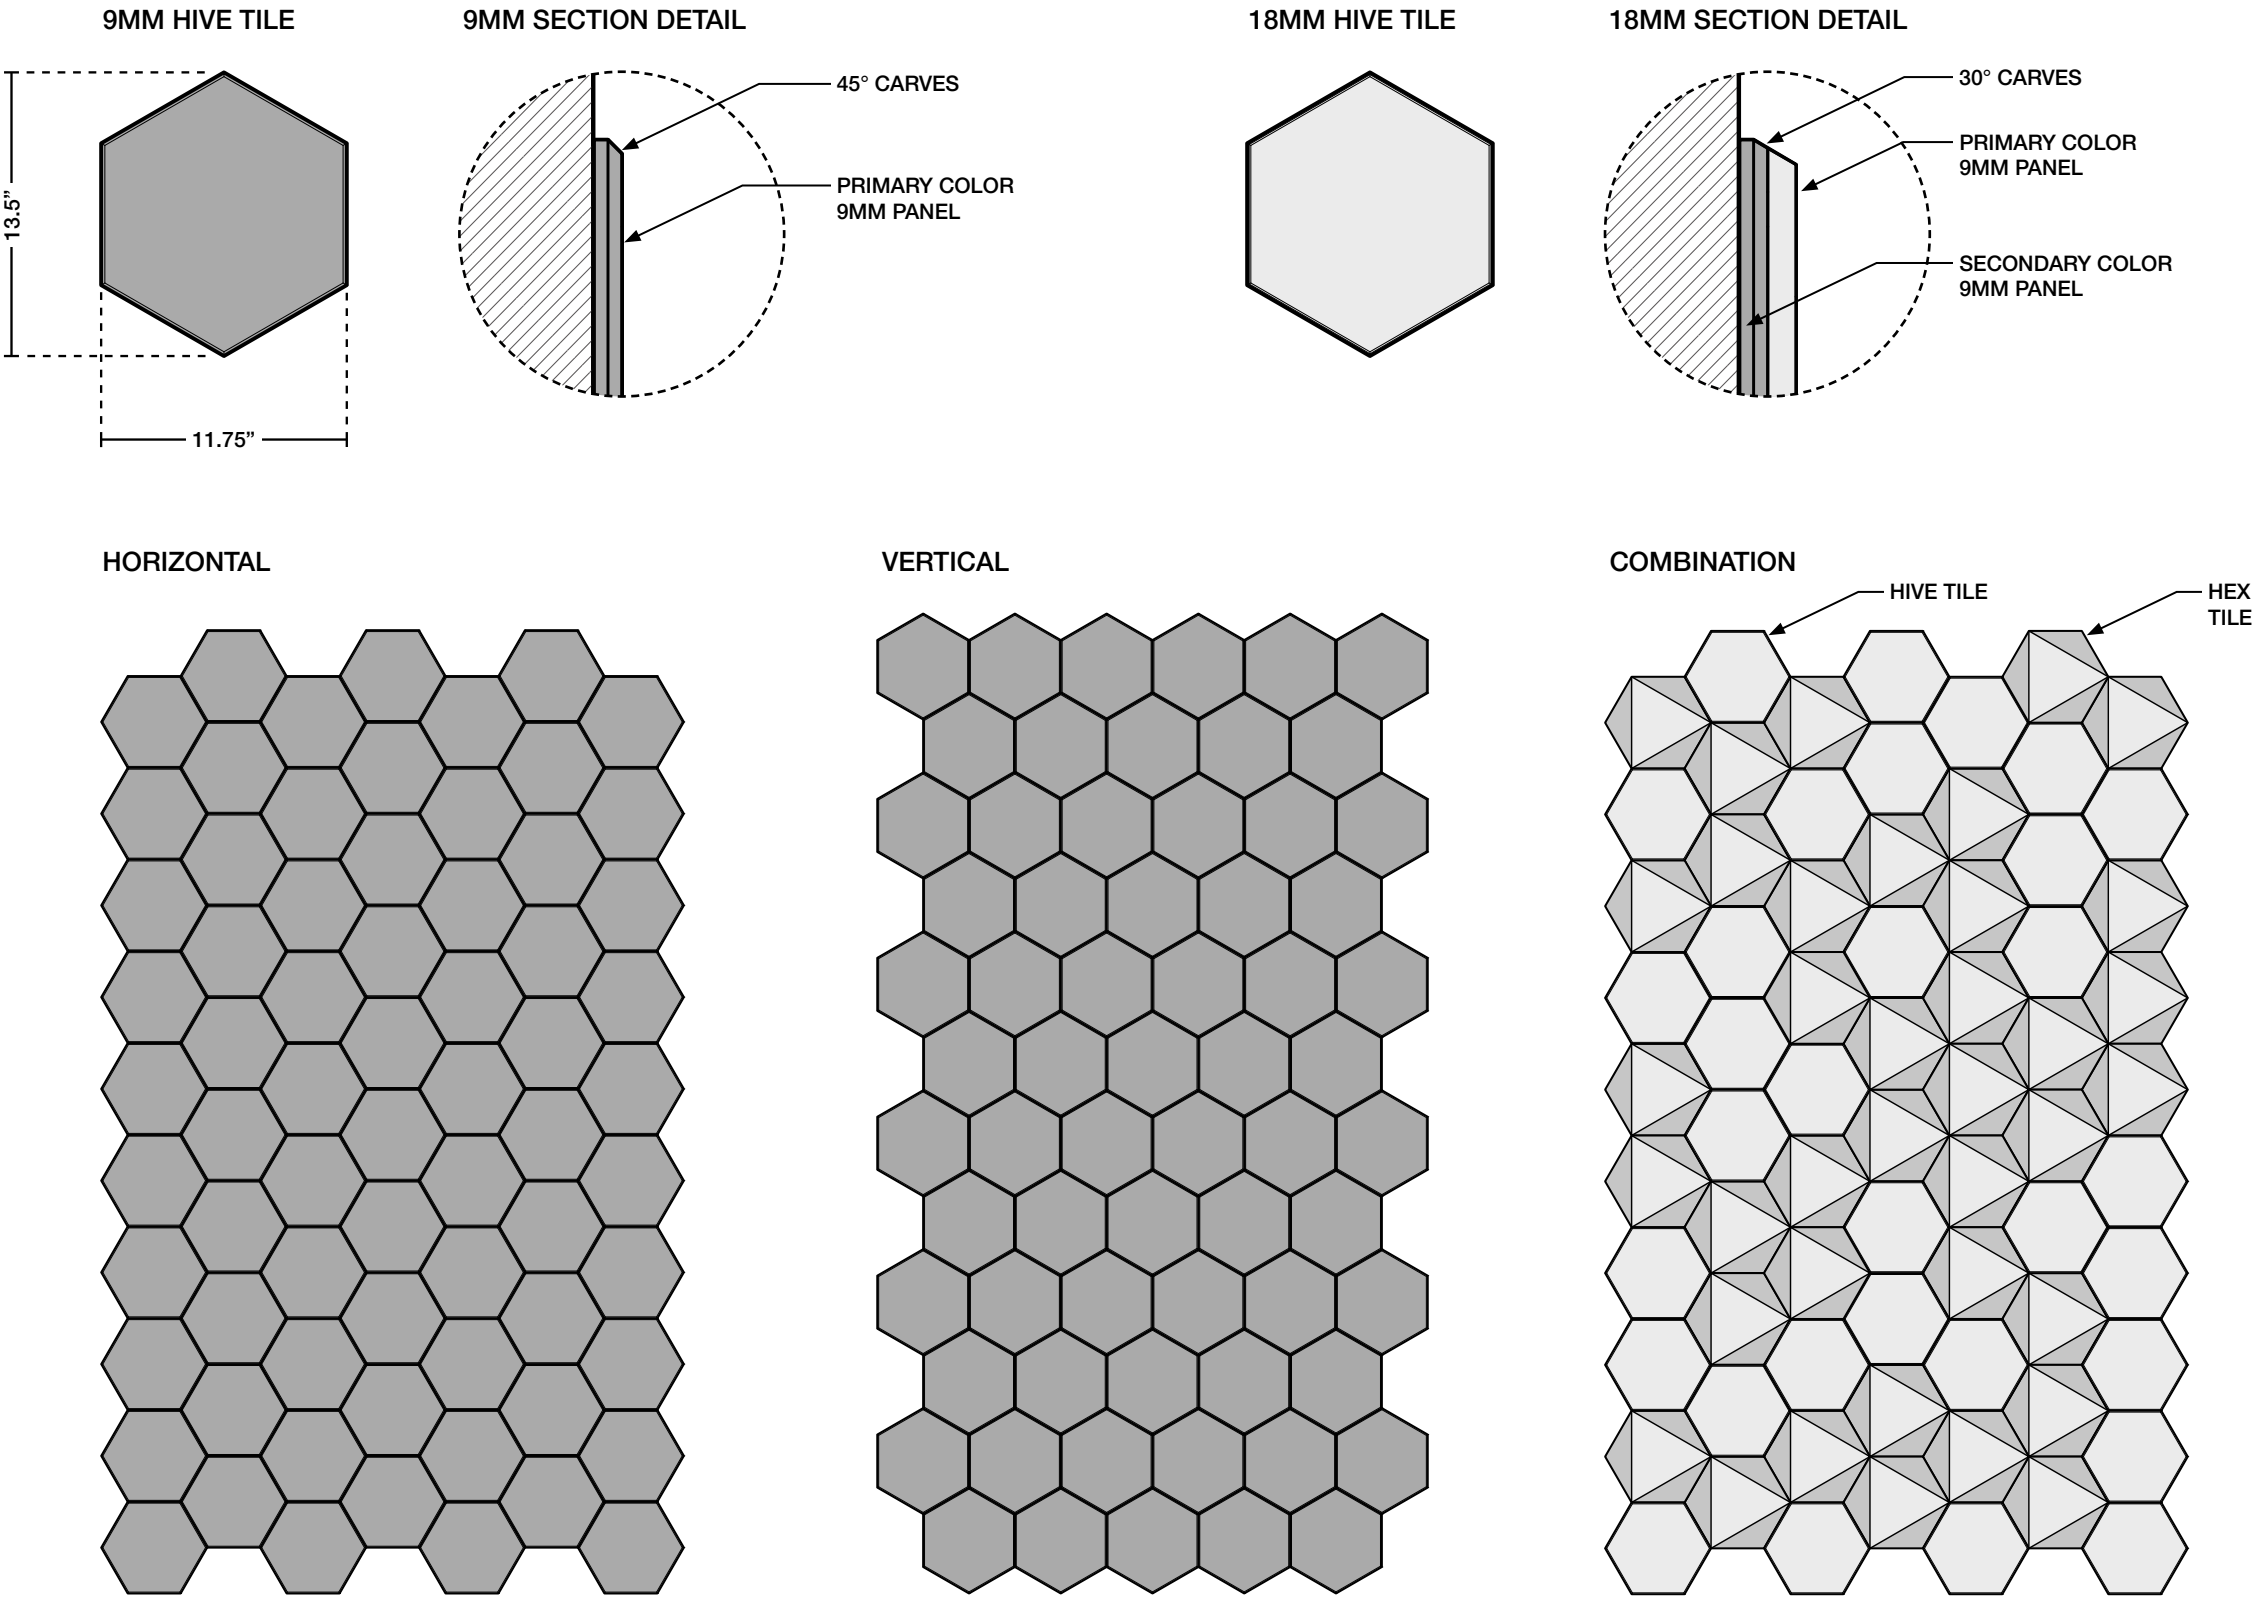

ALL DIMENSIONS NOMINAL UNLESS NOTED OTHERWISE




Installation & Field Trim Guide

Hive is designed for a quick and easily install, and can accommodate trimming in field — just follow this simple guide.


This guide shows Hive with Turf applied adhesive backing. Alternatively tiles can be installed with construction grade adhesive specified by the contractor.

Please note, prep the wall surface before application. Clean the surface of any dust or loose debris, making sure the surface is dry before application.


Tools Required




SHARP BLADE



STRAIGHT
EDGE




DRILL




HOLE SAW


1 - ADHESIVE BACKING BY TURF

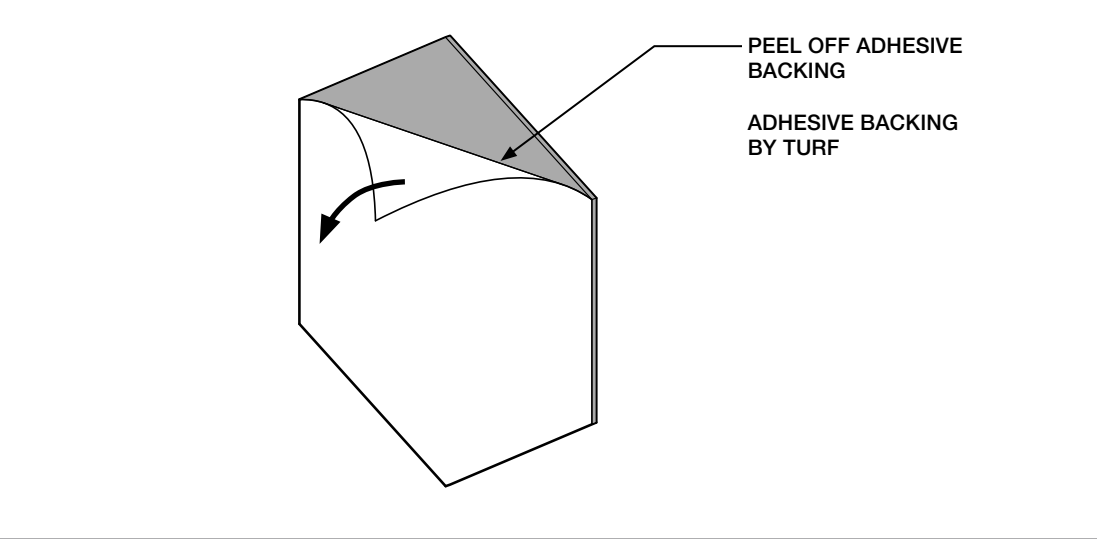


2 - MOUNT HIVE TO WALL

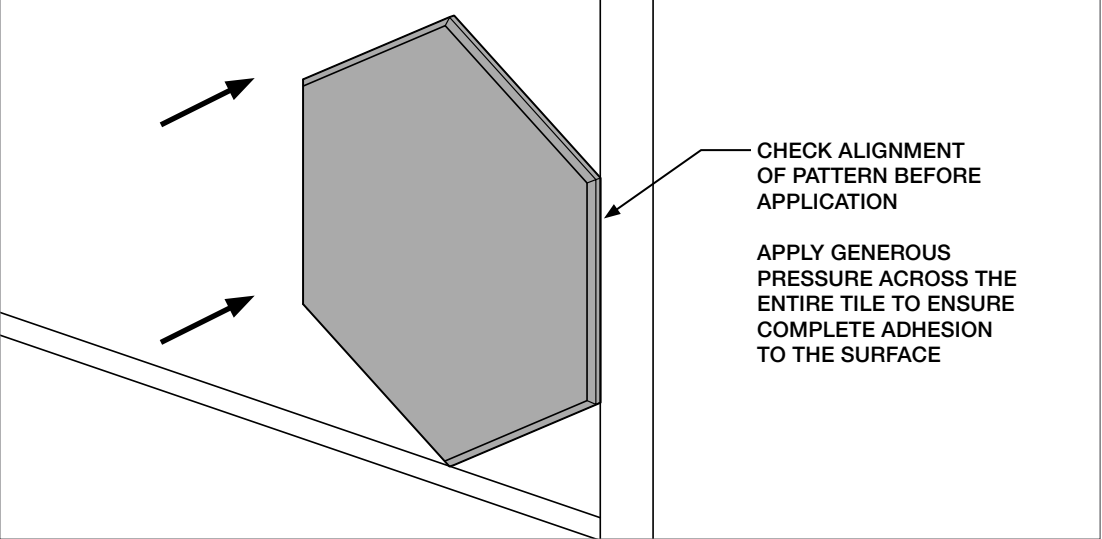

3 - TRIM AS REQUIRED

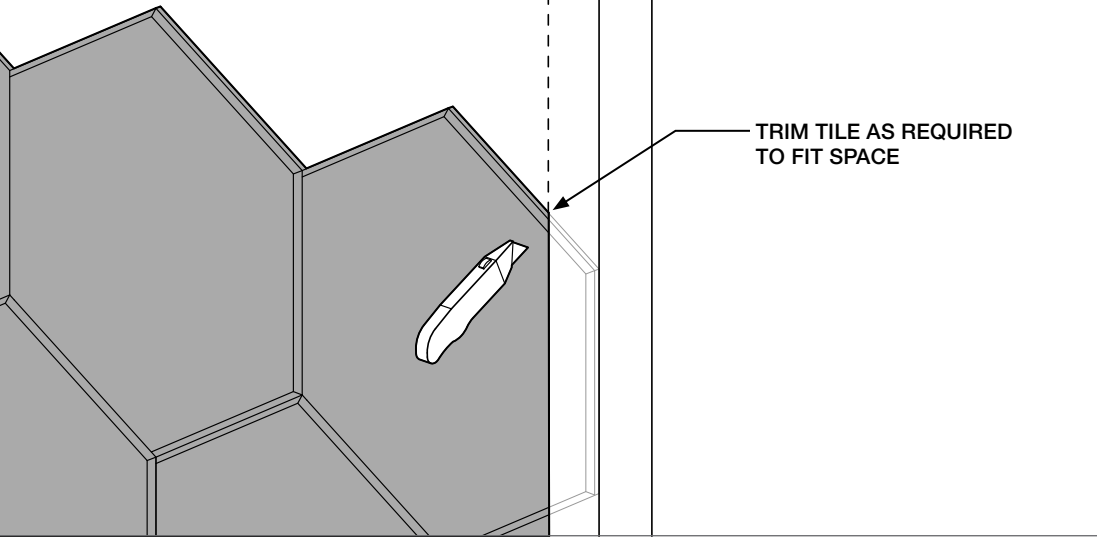

4 - TRIM CIRCULAR HOLES

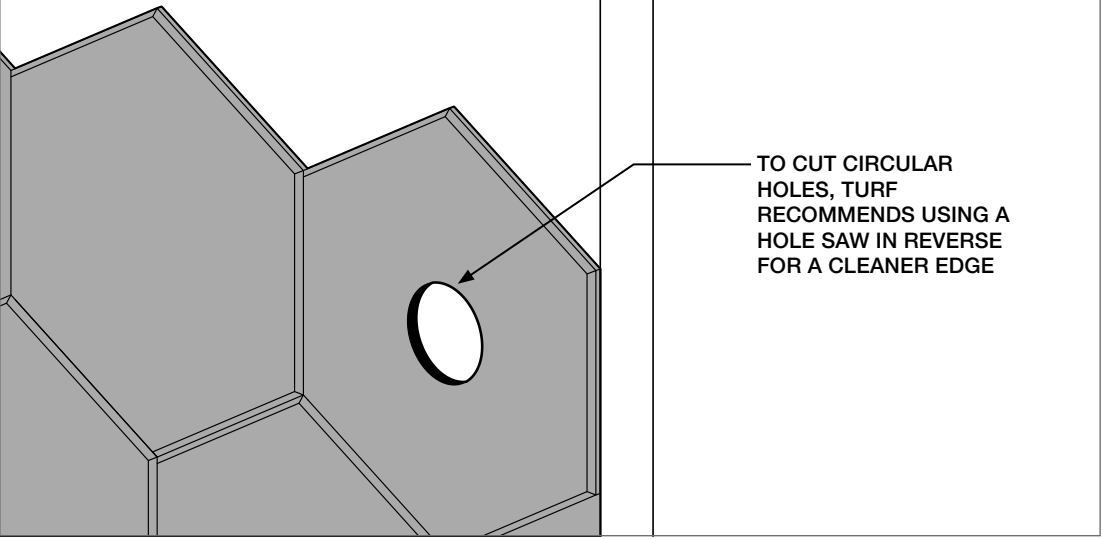

Tech	
Acoustics	ASTM C 423-17: Type A
Fire Rating	ASTM E-84 – Class A
VOC	ASTM D5116 Compliant

Details	
Lead Time	Check the Turf website for current lead times.
Warranty	Five (5) years
Maintenance	Vacuum to remove any particulate matter and air-borne debris or dust. Compressed air can be used to dust the material in difficult to reach areas for large assemblies. Contact us for more information relative to spot cleaning.
Attachments	Turf products are not designed to support the weight of other objects or fixtures.

Acoustic Rating	
9mm Tile	NRC = 0.25
18mm Tile	NRC = 0.40
Carved wall tile NRC varies depending on field conditions and arrangement. Contact Turf for testing details.	




Certifications	
<div> <div>  </div> <div>   </div> </div>	



Photo by Tyllie Barbosa

9mm Colors

Introducing Hues, our new 9mm color palette designed for the senses.

The 9mm PET felt board is used as our primary construction material. Select one of our coordinating neutrals to blend in, or go for a contrasting element with one of our hues.

The process used to create PET felt often results in a heathered effect where multiple tones are present. Slight variations in color should be expected when using this sustainable material.

Felt Thickness
9mm +/-0.5 mm

Monitors and printers vary.
Please request a material sample to verify felt colors.



10 TOPO GREEN



12 GRASSHOPPER



11 CELADON




63 SAFFLOWER



64 PLANTAIN




43 ORANGE CRUSH




18 ULTISOL



17 BLUSH



23 RED



15 MERLOT



50 IVORY



33 LUMINARY



83 HOLLAND OATS




82 BARLEY




34 TONAL TAUPE




35 BARK




28 INDIGO




30 CYAN




24 ROYAL BLUE




31 AZURE




27 JEAN JACKET




26 FADED DENIM



40 MAGENTA




41 DRIED LAVENDER




66 PEWTER



05 WHITE




01 CREAM




04 LIGHT GREY



98 STORM



09 DAMASCUS



06 CHARCOAL



07 BLACK

