



**Swell**

by

**T U R F**





# Swell

## SCULPTURAL & TRANSFORMATIVE

The Swell Ceiling System is a drop ceiling product series that transforms office interiors through both cutting edge aesthetics and acoustical performance. Made from our 60% recycled PET felt, the five modular tiles can be rotated and configured in multiple orientations to create endlessly customizable ceiling sculptures.





# Tile A

1

**PERSPECTIVE**

Tile A is designed with an undulation on opposing corners, enabling the tile to be mirrored and repeated to create endless waves.

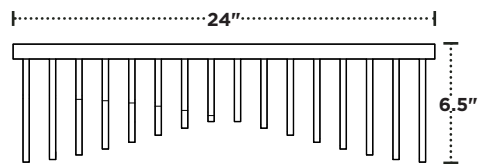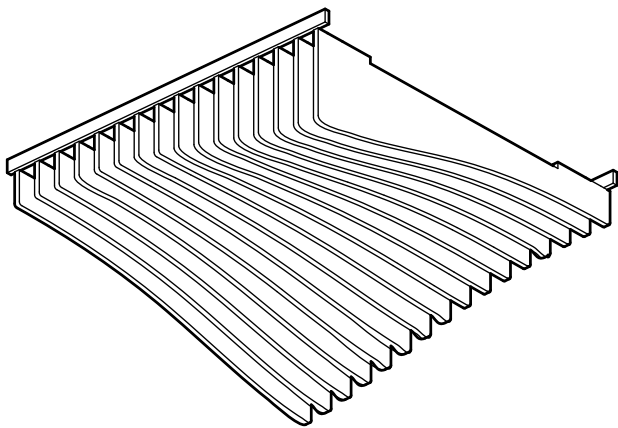

3


**SIDE ELEVATION**

Dropping a **maximum of 6.5"** below **the ceiling grid height** allows Swell to transform a space without obstructing clearance heights of standard offices.

2

**PLAN VIEW**


The vertically oriented material allows for over **70% openness**, the international building standard for sprinkler penetration. This allows for a ceiling canopy to be installed below existing sprinkler systems (subject to local building codes).

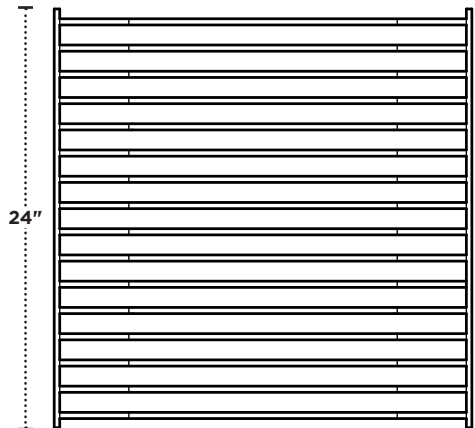

4

**FRONT ELEVATION**

The notches on the edges of each slat assembly easily receives a variety of drop ceiling grid profiles.


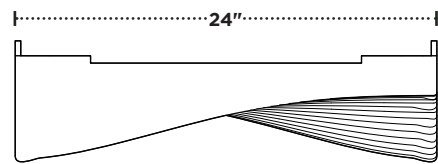


# Tile B

1

**PERSPECTIVE**

Tile B is designed with an undulation in one corner and transitions to a flat corner, enabling the tile to flow into Tile A, C, and both D's.

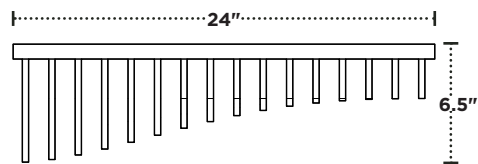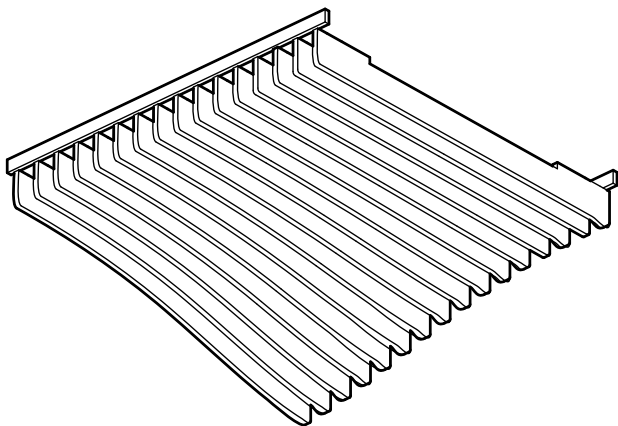

3


**SIDE ELEVATION**

Dropping a **maximum of 6.5"** below **the ceiling grid height** allows Swell to transform a space without obstructing clearance heights of standard offices.

2

**PLAN VIEW**


The vertically oriented material allows for over **70% openness**, the international building standard for sprinkler penetration. This allows for a ceiling canopy to be installed below existing sprinkler systems (subject to local building codes).

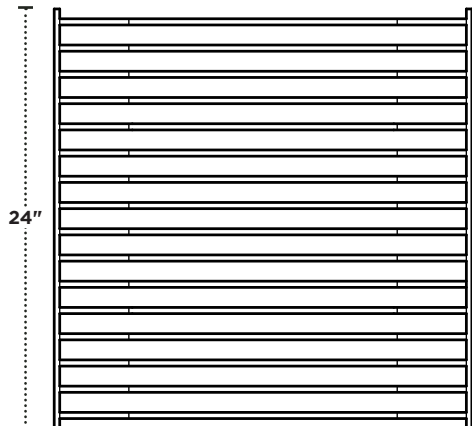

4

**FRONT ELEVATION**

The notches on the edges of each slat assembly easily receives a variety of drop ceiling grid profiles.


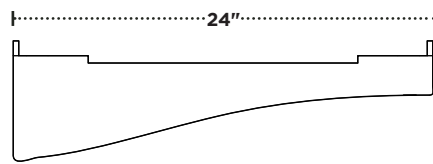


# Tile C

1

**PERSPECTIVE**

Tile C is a flat tile configuration that flows into Tile B and Tile DB

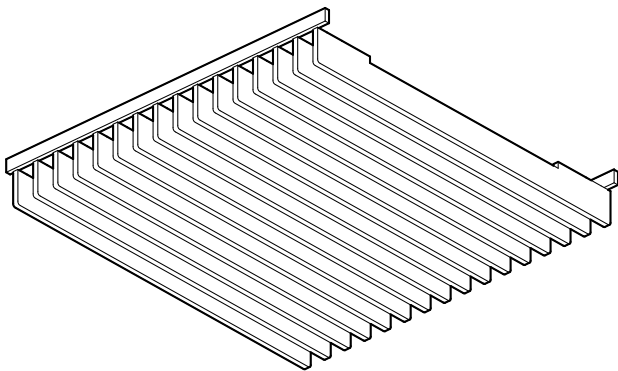

3


**SIDE ELEVATION**

Dropping a **maximum of 6.5" below the ceiling grid height** allows Swell to transform a space without obstructing clearance heights of standard offices.

2

**PLAN VIEW**


The vertically oriented material allows for over **70% openness**, the international building standard for sprinkler penetration. This allows for a ceiling canopy to be installed below existing sprinkler systems (subject to local building codes).

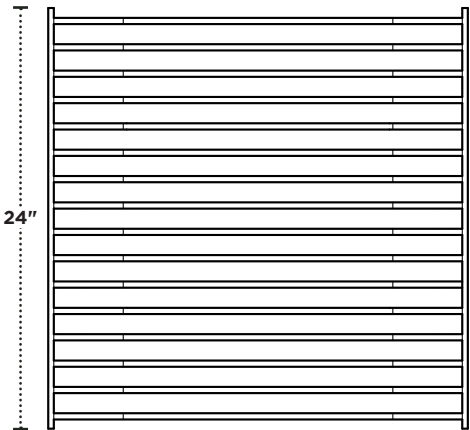

4

**FRONT ELEVATION**

The notches on the edges of each slat assembly easily receives a variety of drop ceiling grid profiles.




# Tile DA

1

**PERSPECTIVE**



Tile DA is designed to flow in and out of tile A and Tile B. It is designed to rise over the grid to avoid existing grid level sprinklers and lighting elements.

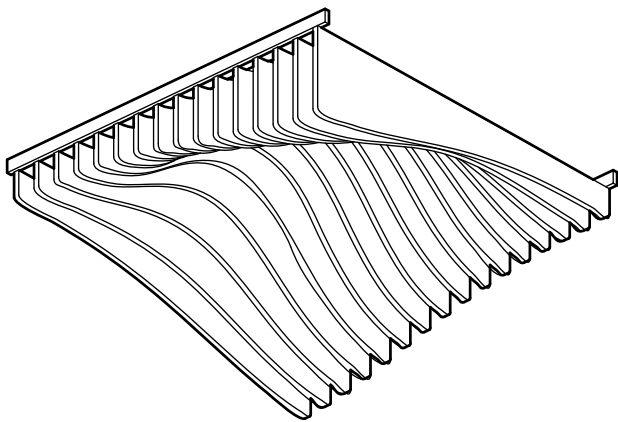

2

**PLAN VIEW**


The vertically oriented material allows for over **70% openness**, the international building standard for sprinkler penetration. This allows for a ceiling canopy to be installed below existing sprinkler systems (subject to local building codes).

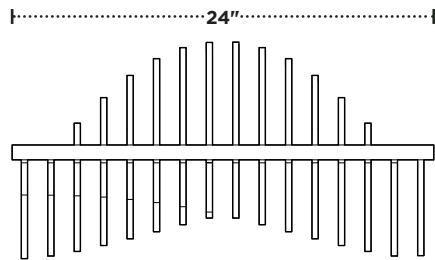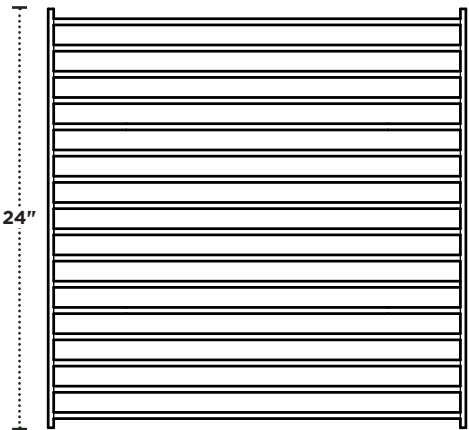

3

**SIDE ELEVATION**

Dropping a **maximum of 6.5"** below the ceiling grid height allows Swell to transform a space without obstructing clearance heights of standard offices.

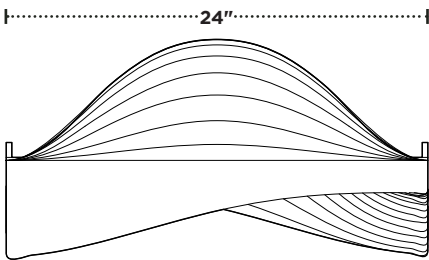

4

**FRONT ELEVATION**


The notches on the edges of each slat assembly easily receives a variety of drop ceiling grid profiles.

# Tile DB

1

### PERSPECTIVE



Tile DB is designed to flow in and out of tile A, tile B, and tile C. It is designed to rise over the grid to avoid existing grid level sprinklers and lighting elements.

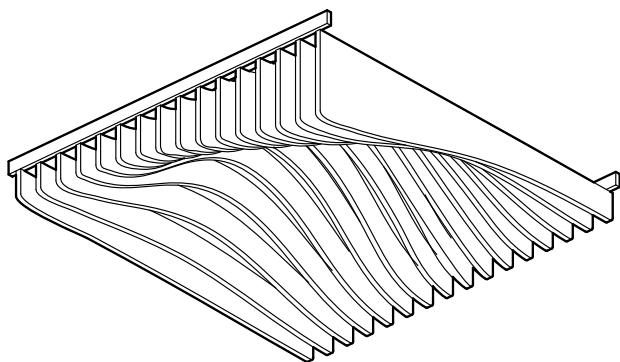

2

### PLAN VIEW

The vertically oriented material allows for over **70% openness**, the international building standard for sprinkler penetration. This allows for a ceiling canopy to be installed below existing sprinkler systems (subject to local building codes).

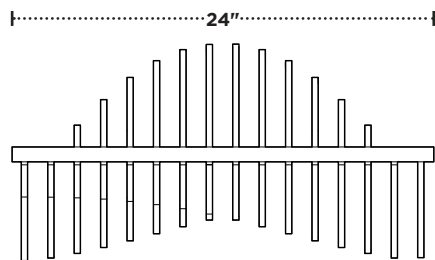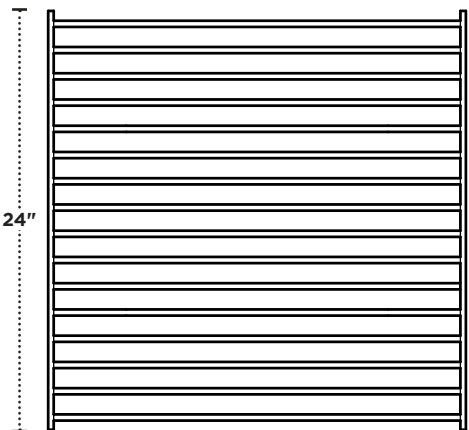

3


### SIDE ELEVATION

Dropping a **maximum of 6.5"** below **the ceiling grid height** allows Swell to transform a space without obstructing clearance heights of standard offices.


4

### FRONT ELEVATION


The notches on the edges of each slat assembly easily receives a variety of drop ceiling grid profiles.

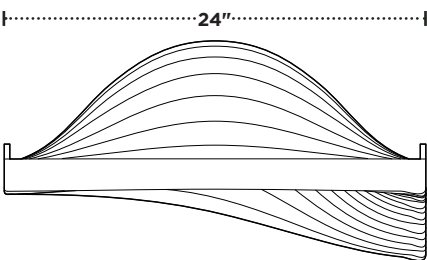

# Assembly

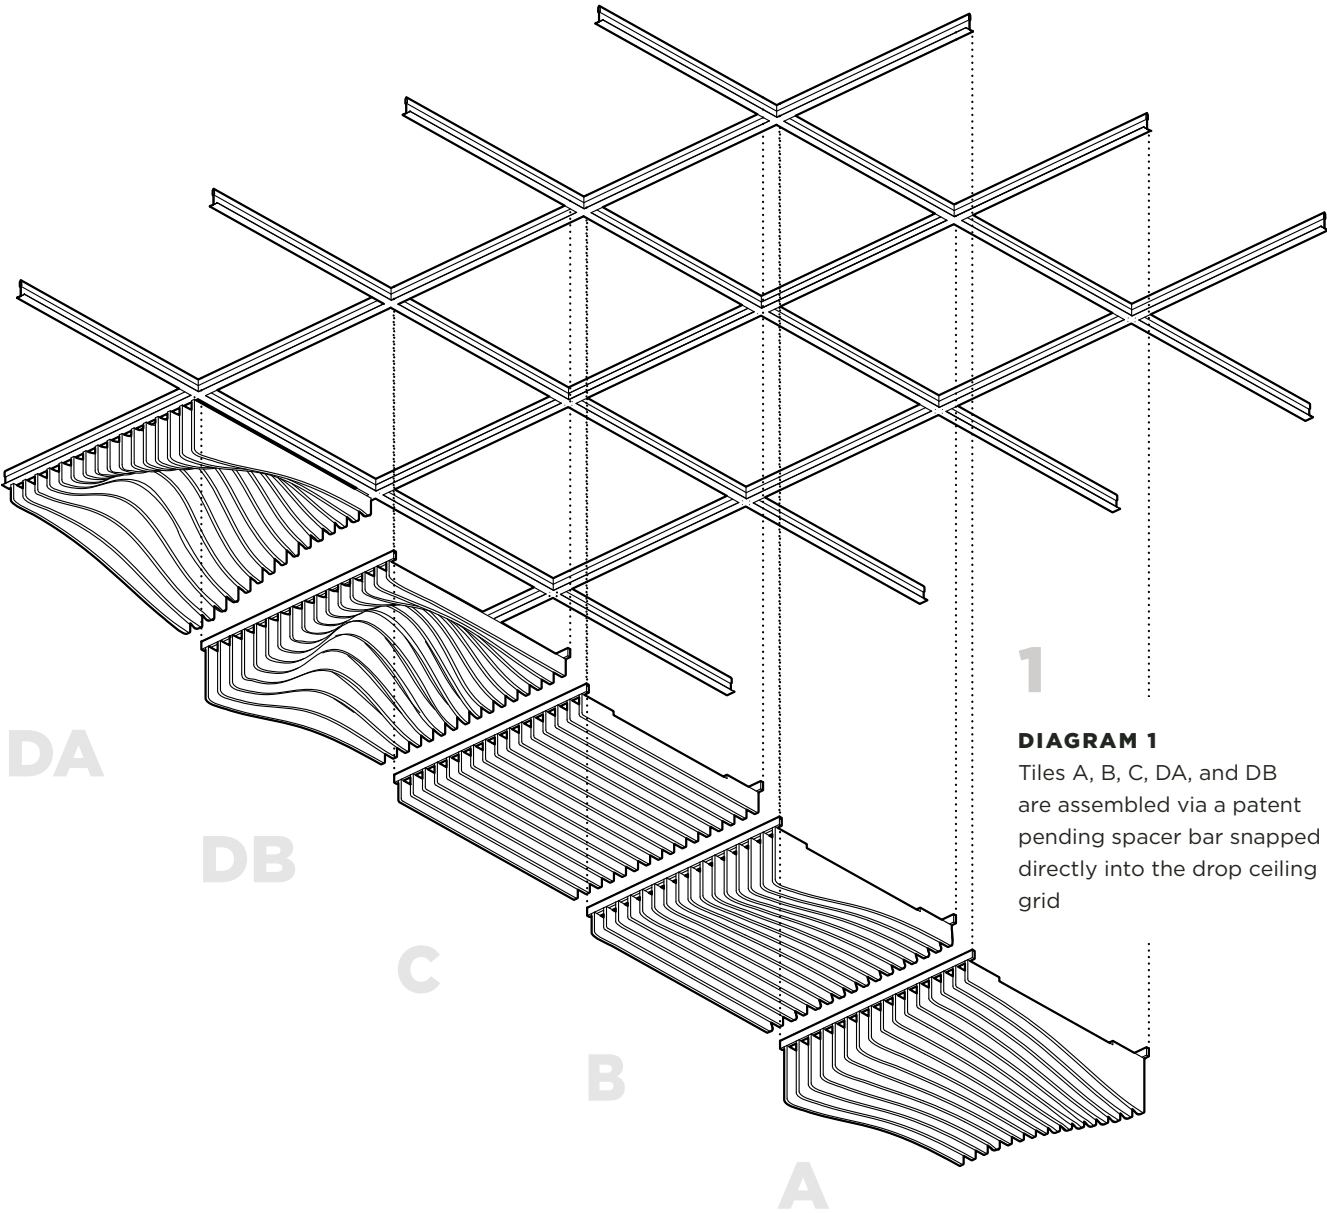

**DIAGRAM 1**  
Tiles A, B, C, DA, and DB are assembled via a patent pending spacer bar snapped directly into the drop ceiling grid

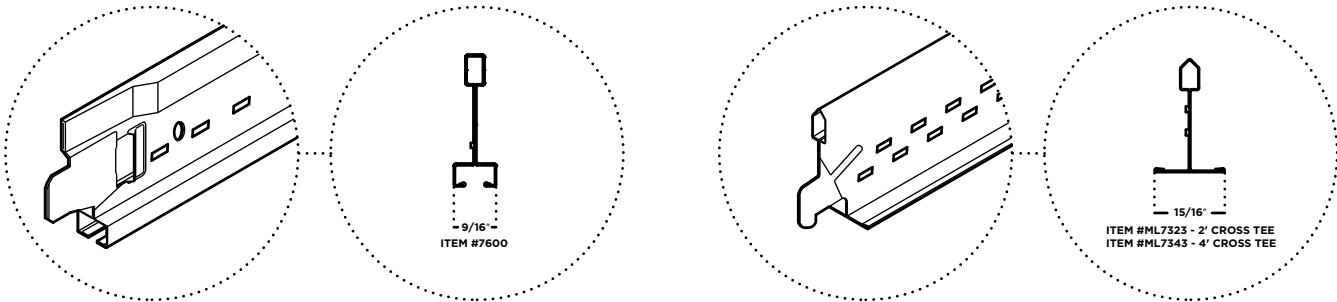


## 2

**TEE GRID OPTIONS**

The Swell Ceiling Tile system snaps into both 9/16" and 15/16" standard tee grid drop ceiling grids.





# Assembly

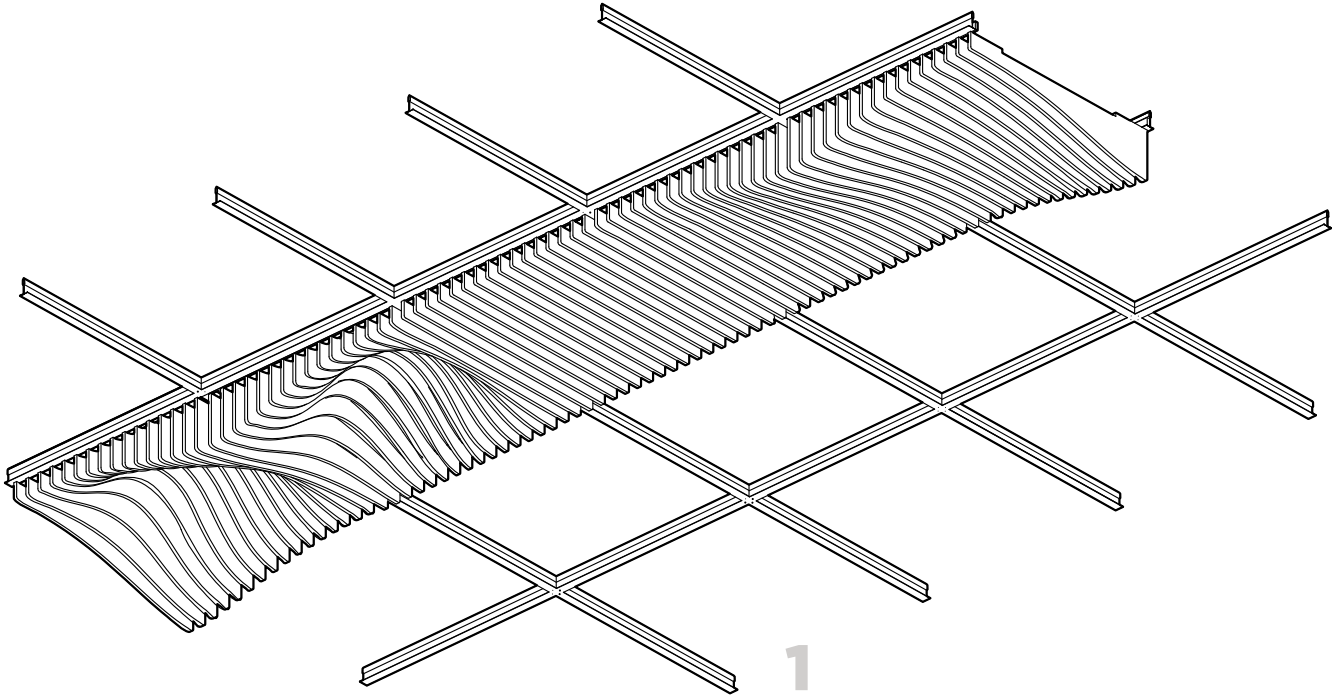

## DIAGRAM 2

The five tiles are designed to flow into the adjacent tile in order to create a seamless pattern. Tile A flows into Tile B which flows into Tile C, Tile DB, and Tile DA then which flows back into Tile A.

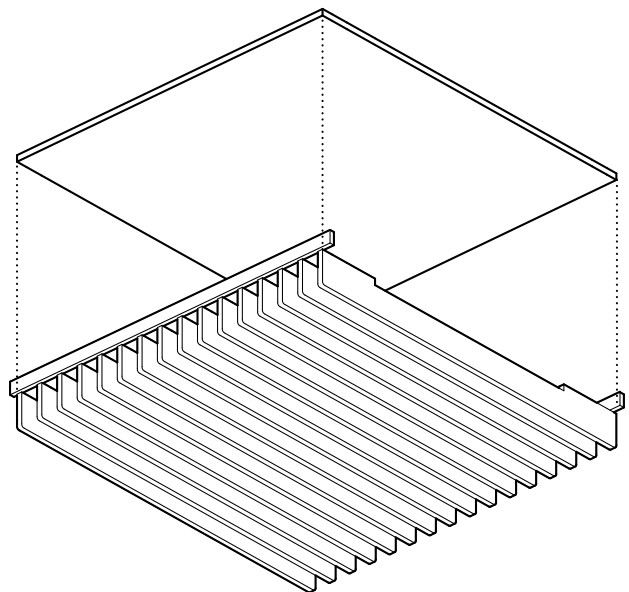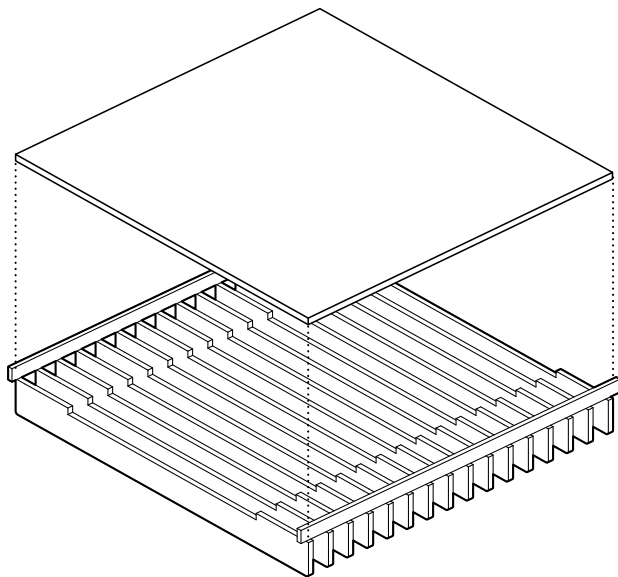

## 2

### OPTIONAL TILE CAP

Swell Tiles also comes in a capped option for an even more effective solution.

# Specifications

PRODUCT NAME	Swell Tile
CONTENT	Up to 60% Pre-Consumer Recycled Content Polyester Felt
FELT THICKNESS	9mm
PANEL THICKNESS	Varies
SMALLEST SIZE	21.625" x 21.625"
MAXIMUM SIZE	21.625" x 21.625"
EDGE OPTIONS	Exposed Felt
COMPONENTS	UNISTRUT P1000T Standard, nylon panel clip, universal steel Tee Grid, 1/16th inch Aircraft Cable. (supplied by installer)
DURABILITY	Contract
MAINTENANCE	Vacuum occasionally to remove any particulate matter and air-borne debris or dust. Compressed air can be used to dust the material in difficult to reach areas for large assemblies.
LEAD TIME	Check the Turf website for current lead times.
ENVIRONMENTAL	9mm PET felt board is made from up to 60% pre-consumer recycled content. TURF has a Declare Label for this product. TURF is pursuing product transparency for LEED V4 MR Credit 4 Option 1, and MR Credit 3 Option 2 for recycled content.
VARIATION	PET Felt uses a traditional 'felting' process to create its panels. This often results in a pleasing heathered effect, where multiple tones are present in the fiber. Slight and consistent variations in color should be expected when using this sustainable material.
ACOUSTICS	ASTM C423-17: NRC = 0.75 (Material)
VOC	ASTM D 5116 Compliant
FIRE RATING	Product made from Class A PET felt material tested under ASTM E-84.



# 9MM FELT

This product is made with 9 mm PET felt board. The process used to create PET felt often results in a heathered effect where multiple tones are present. Slight variations in color should be expected when using this sustainable material.

Felt thickness is 9 mm +/- 0.5 mm.


**Monitors and printers vary. Please request a material sample to verify felt colors.**

## Looking for the old color palette?


Old colors are still available for legacy projects, but check with us for availability if you're interested in using them for new projects.




07 BLACK




06 CHARCOAL




09 DAMASCUS




98 STORM




04 LIGHT GREY



66 PEWTER



50 IVORY



01 CREAM



33 LUMINARY



05 WHITE




35 BARK




34 TONAL TAUPE



82 BARLEY




83 HOLLAND OATS




24 ROYAL BLUE




10 TOPO GREEN




12 GRASSHOPPER




11 CELADON




40 MAGENTA




41 DRIED LAVENDER




28 INDIGO



30 CYAN



31 AZURE




27 JEAN JACKET




26 FADED DENIM




23 RED




15 MERLOT



18 ULTISOL



17 BLUSH



43 ORANGE CRUSH




63 SAFFLOWER



64 PLANTAIN

# Acoustic Testing (ASTM C 423-17)

FREQUENCY (Hz)	SOUND ABSORPTION COEFFICIENT
32	.03
40	-.01
50	-.02
63	-.07
80	.06
100	.09
125	.12
160	.20
200	.24
250	.33
315	.45
400	.59
500	.76
630	.85
800	.89
1,000	1.00
1,250	1.06
1,600	1.06
2,000	.99
2,500	.89
3,150	.83
4,000	.94
5,000	1.04
6,300	1.00
8,000	1.05
10,000	1.07
12,500	1.07

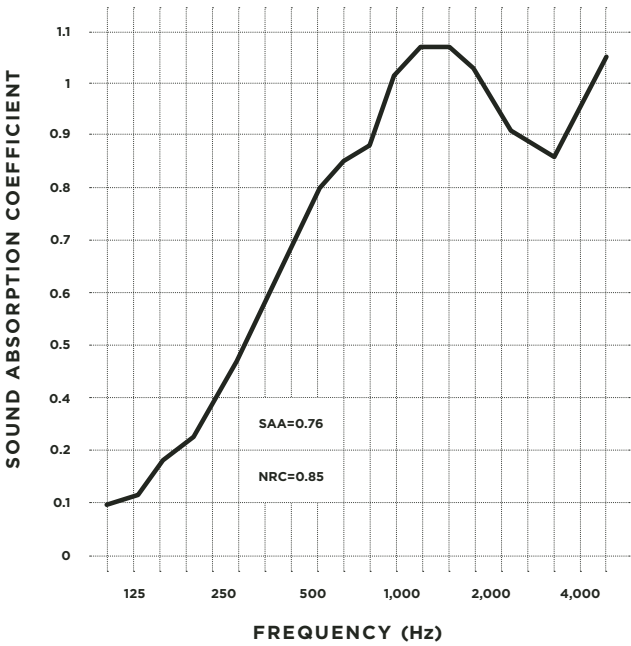

## TEST ARRANGEMENT

PET Acoustic panel =400mm air layer.

## TEST DISCLAIMER

NRC test reflects material testing. Specific product testing for Swell Tile coming soon.

## Declare.

**3mm + 9mm PET Acoustic Panel  
TURF Design**

**Final Assembly:** Gilberts, Illinois, USA  
**Life Expectancy:** 50 Year(s)  
**End of Life Options:** Salvageable/Reusable in its Entirety, Recyclable (100%)

**Ingredients:**

PET; Flame Retardant; NN'-Ethylene bis(stearamide); White Tint; Antioxidant 1076; Antioxidant KY-405; Stearic Acid

**Living Building Challenge Criteria:** Compliant

**I-13 Red List:**

- ☒ LBC Red List Free
- ☐ LBC Red List Approved
- ☐ Declared

% Disclosed: 100% at 100ppm  
VOC Content: Not Applicable

**I-10 Interior Performance:** CDPH Standard Method v1.2-2017  
**I-14 Responsible Sourcing:** Not Applicable

TFD-0002  
EXP: 01 DEC 2022  
Original Issue Date: 2019

INTERNATIONAL LIVING FUTURE INSTITUTE™ [living-future.org/declare](http://living-future.org/declare)