

Acoustic Ceiling Baffle

# Datum

## Power in numbers

Delicate detail meets sonic power. With Datum, each baffle's beveled interior edge can add some color to your ceiling. Specify natural tones for a subtle look, or let your visual freak flag fly with expressive contrasting hues.



Image by The Right Exposure




# How To Specify

Key Information


Datum Baffle can take shape in your space in a variety of ways. Consider these questions as you design your layout.

1

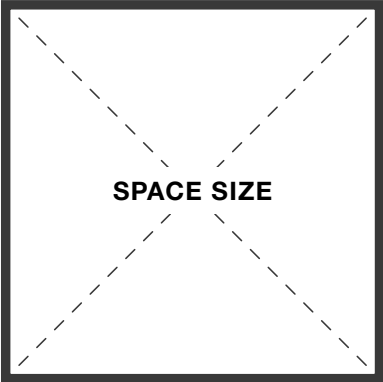

What are the dimensions of the space?


2



What is the baffle depth?

PAGE 3


3

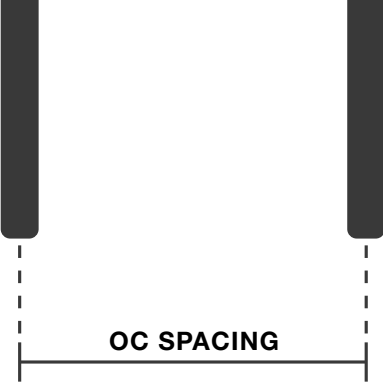

What is the on center spacing?

PAGE 4


4

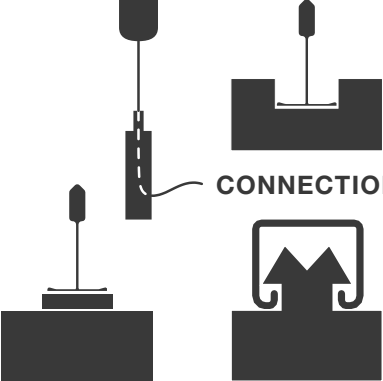

How will Datum Baffle mount to the ceiling?

PAGE 4-5

5



What are the primary and secondary colors?

PAGE 8-9



Dimensions



Variable Length	12"L Min - 119"L Max
Small Range	12" ≤ L < 36"
Medium Range	36" ≤ L < 72"
Large Range	72" ≤ L ≤ 119"
Variable Depth	4"D Min - 22"D Max
	Datum Baffle can have any depth within the above range.
Standard Depths	11.25"D

Recommended Connection Options

P1000T Unistrut	Feltlock
9/16" or 15/16" Tee Grid	Gridlock
Cable Hung	Cable To Deck
Magnetic	Exposed Magnet
	See our Recommended & Alternative Connections pages for more connection options.

Color

9mm Palette	Datum Baffle can be specified in any of our 9mm felt colors or textures.
Color Match	Have another color in mind? Our UV printing process can match almost any hue.
	Note: cut edges of Datum will show the baffle's base felt color.

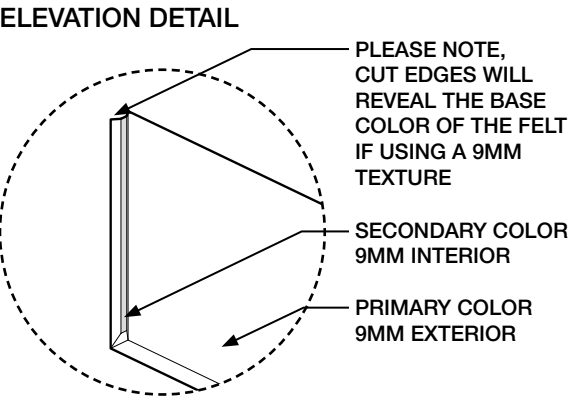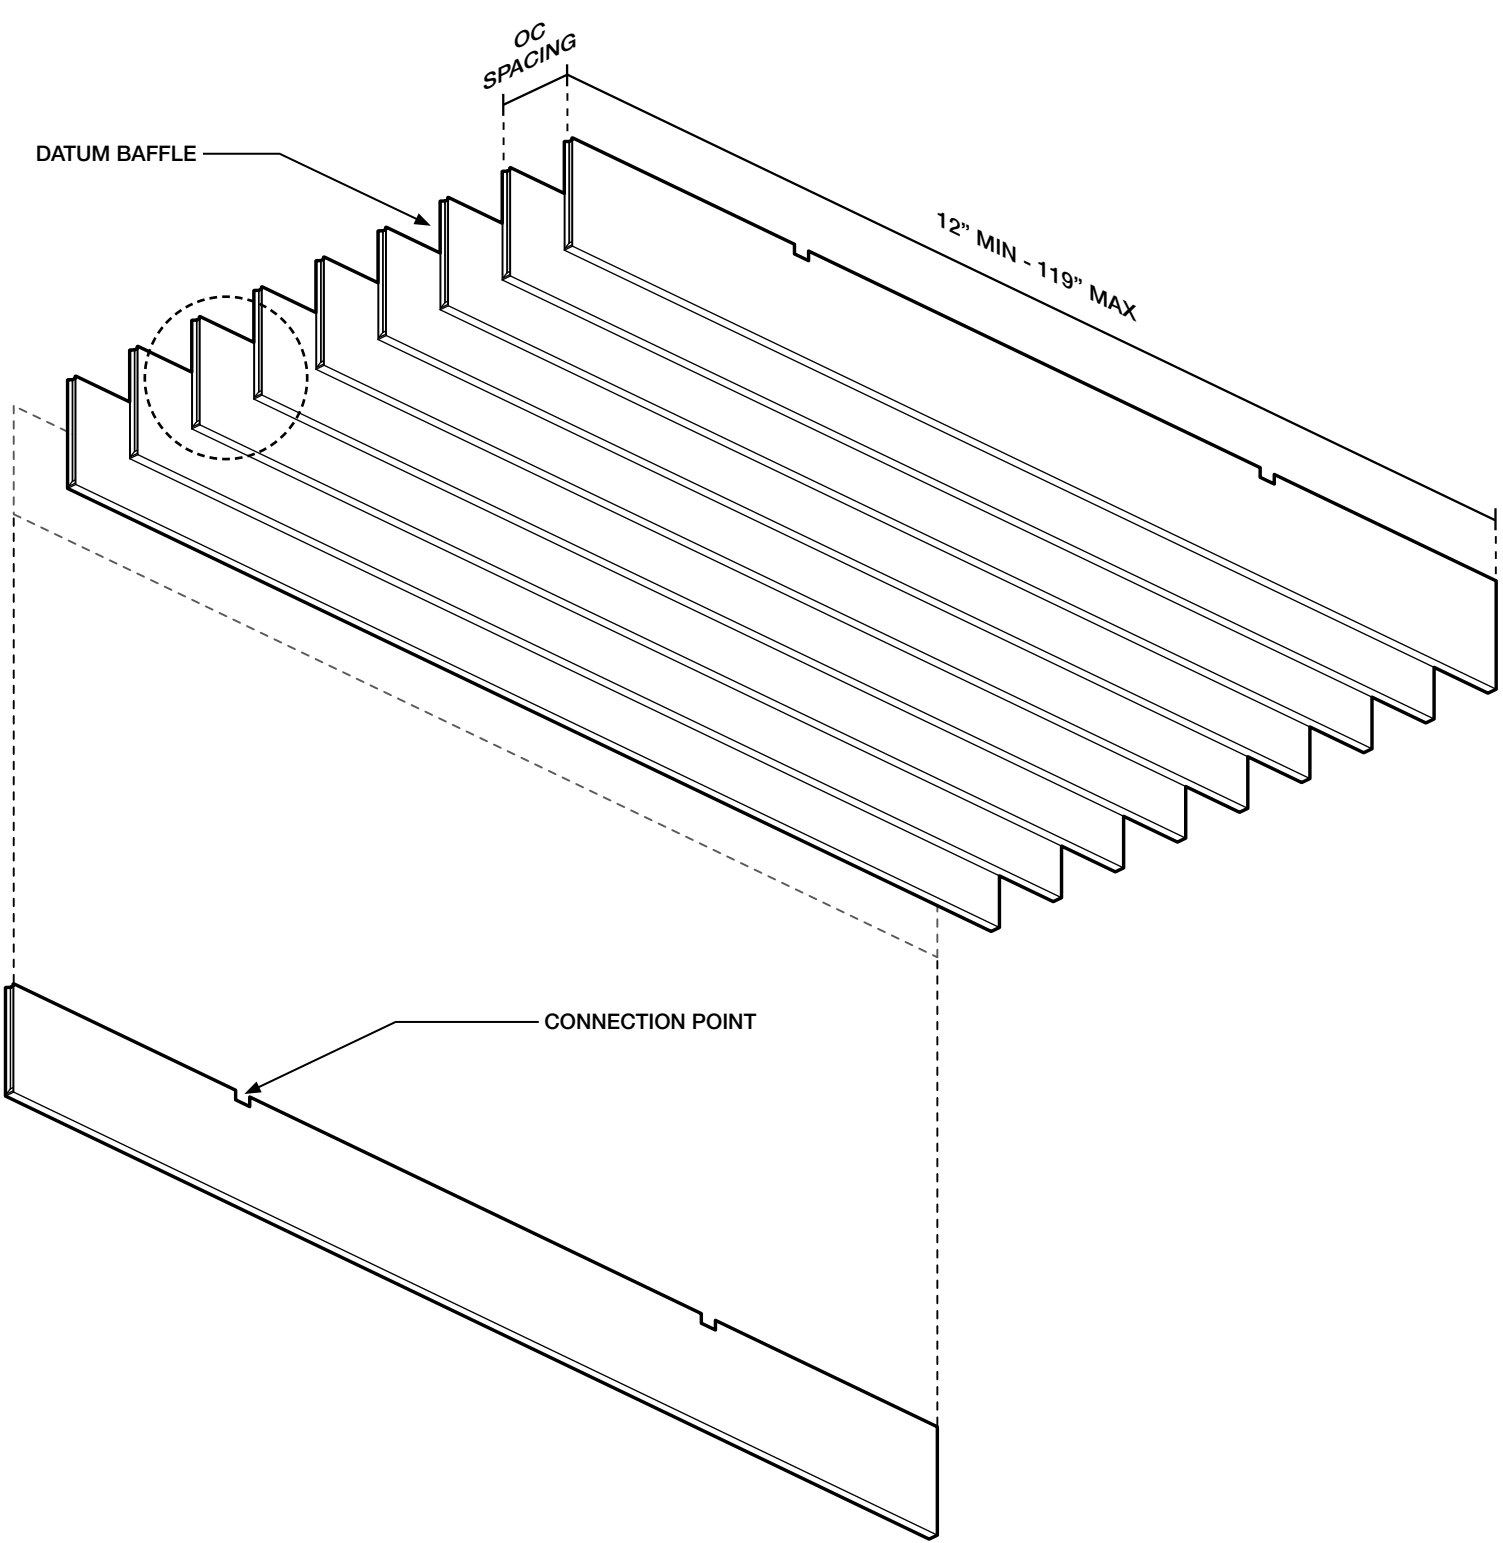

ALL DIMENSIONS NOMINAL UNLESS NOTED OTHERWISE



Elevations and Connections

Connection Spacing 60" OC Max

Spacing varies per project. Baffles require a minimum of two connection points.


Feltlock

Products with Turf’s patented Feltlock flex and compress to insert into Unistrut.

P1000T Unistrut, raw galvanized finish or powder-coated, hardware is required.

Painted unistrut may damage Feltlock installations and will void the product warranty.

CONNECTION SPACING

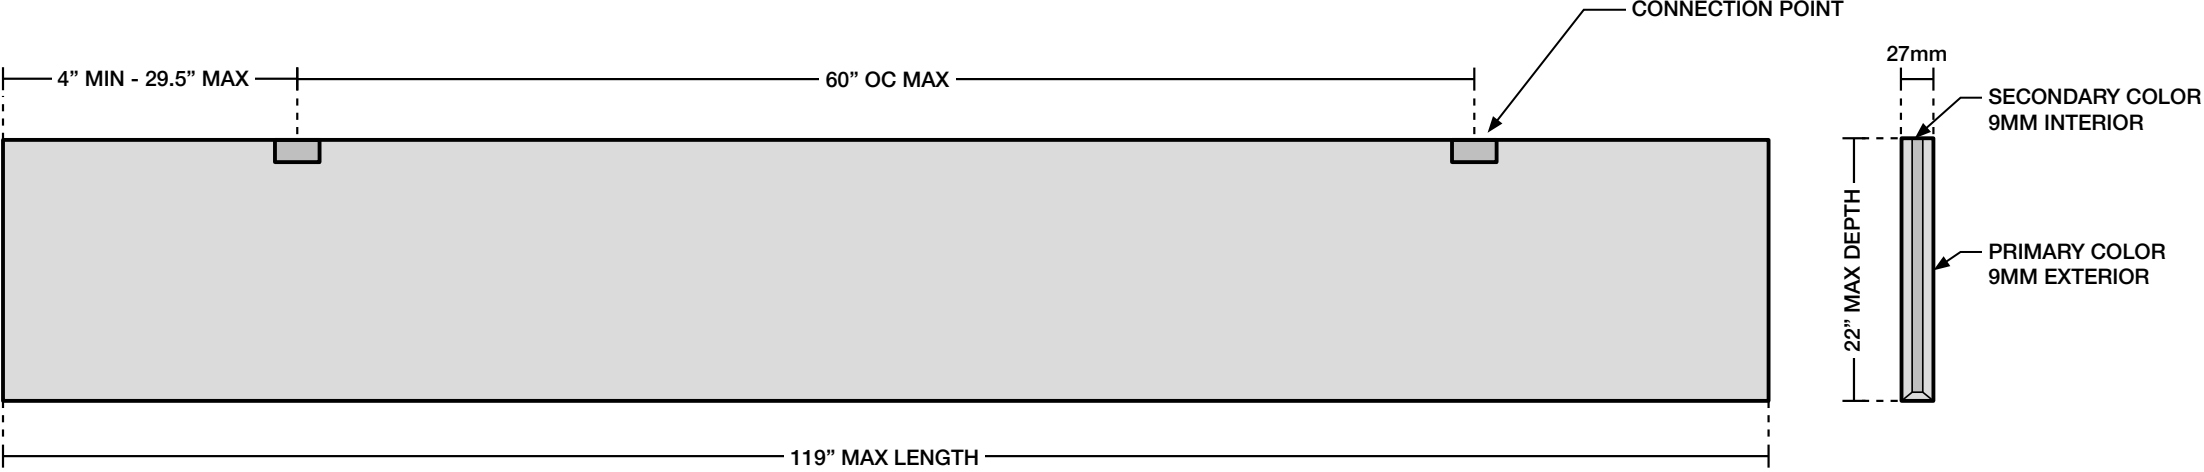


Cable To Deck

Baffles with embedded cable grippers snap into deck-mounted aircraft cables.

10’ aircraft cable supplied by Turf should be trimmed in the field as needed.

RECOMMENDED CONNECTIONS

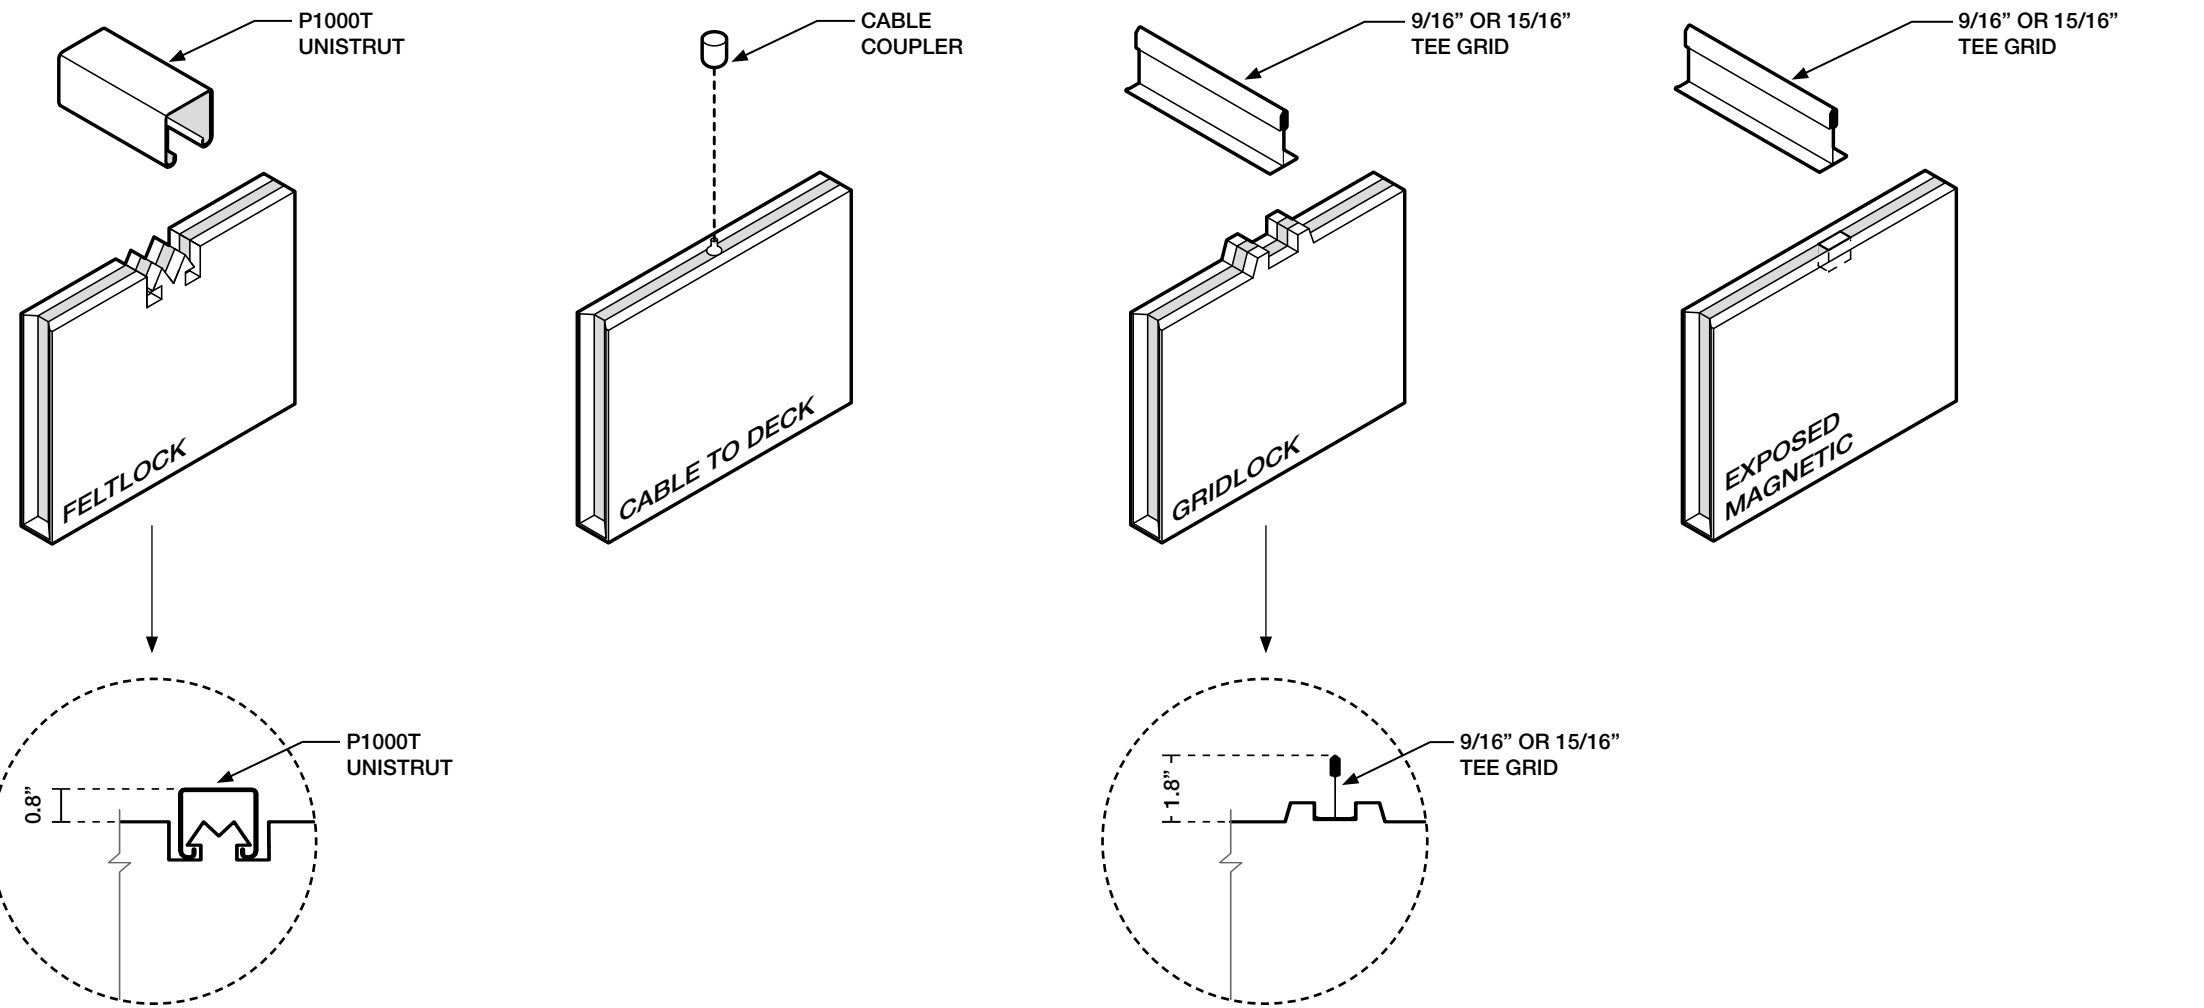

Gridlock

The Gridlock attachment flexes to grasp the tee grid.

9/16" or 15/16" flat tee grid is required.

Exposed Magnetic

A powerful attachment to 9/16" or 15/16" tee grid for secure and easy installation.

ALL DIMENSIONS NOMINAL UNLESS NOTED OTHERWISE



Alternative Connections

Additional Options

Beyond our standard connections, we offer the following connection options for Datum too.

P1000T Unistrut

Cable to Unistrut  
Threaded Rod to Unistrut  
Rotated Feltlock


9/16" or 15/16" Tee Grid

Cable to Tee Grid  
Embedded Nut to Bolt-Slot  
Grid Clip


Miscellaneous

Panel Clip  
Embedded Nut  
Threaded Rod


ALTERNATIVE UNISTRUT CONNECTIONS

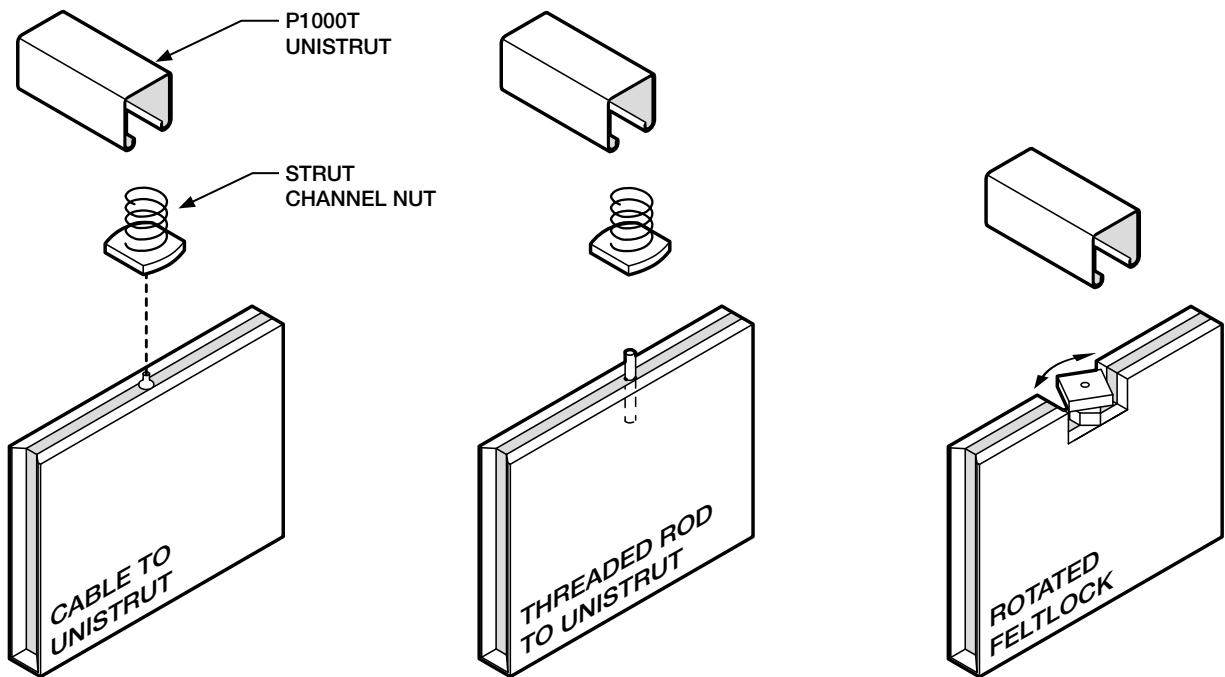

ALTERNATIVE TEE GRID CONNECTIONS

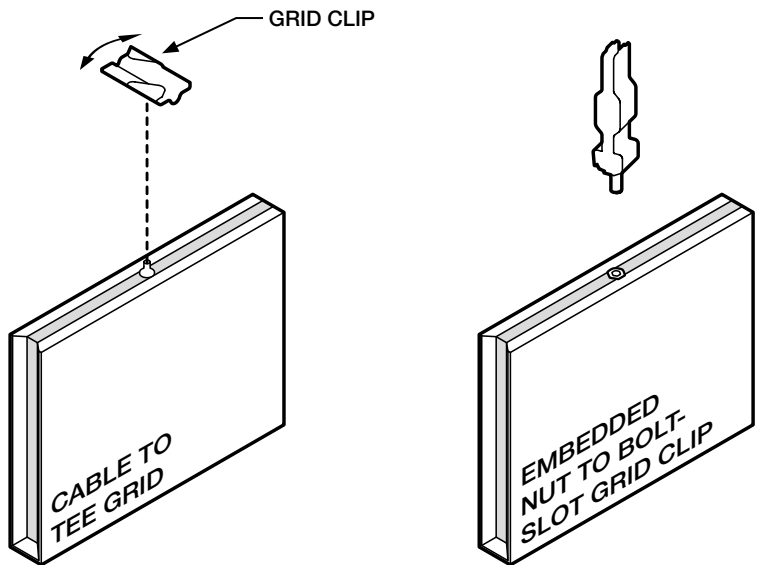

ALTERNATIVE MISCELLANEOUS CONNECTIONS

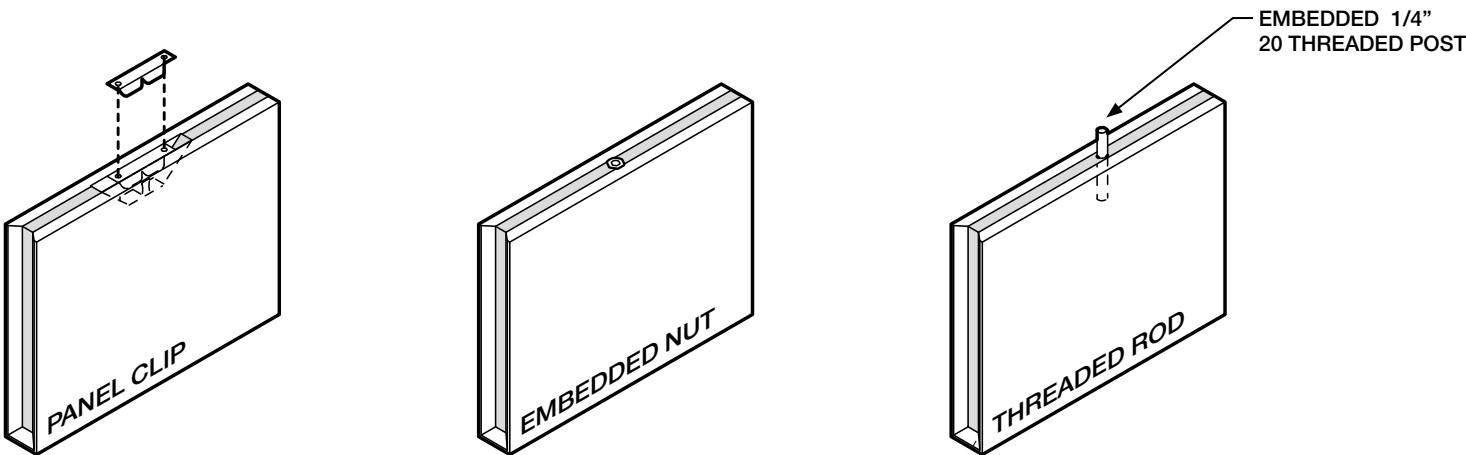



Layout Considerations

Wall Clearance  
Turf recommends a 4" clearance from the wall to our baffles.

Adjacent Baffle Clearance  
Turf recommends a 1" gap between all rows of baffles. This clearance supports a uniform look and build.

If you're looking for no clearance between baffles, we can supply hardware to accommodate at an additional cost.

Trim in Field  
Datum Baffle cannot be trimmed in field, baffles are hollow inside.

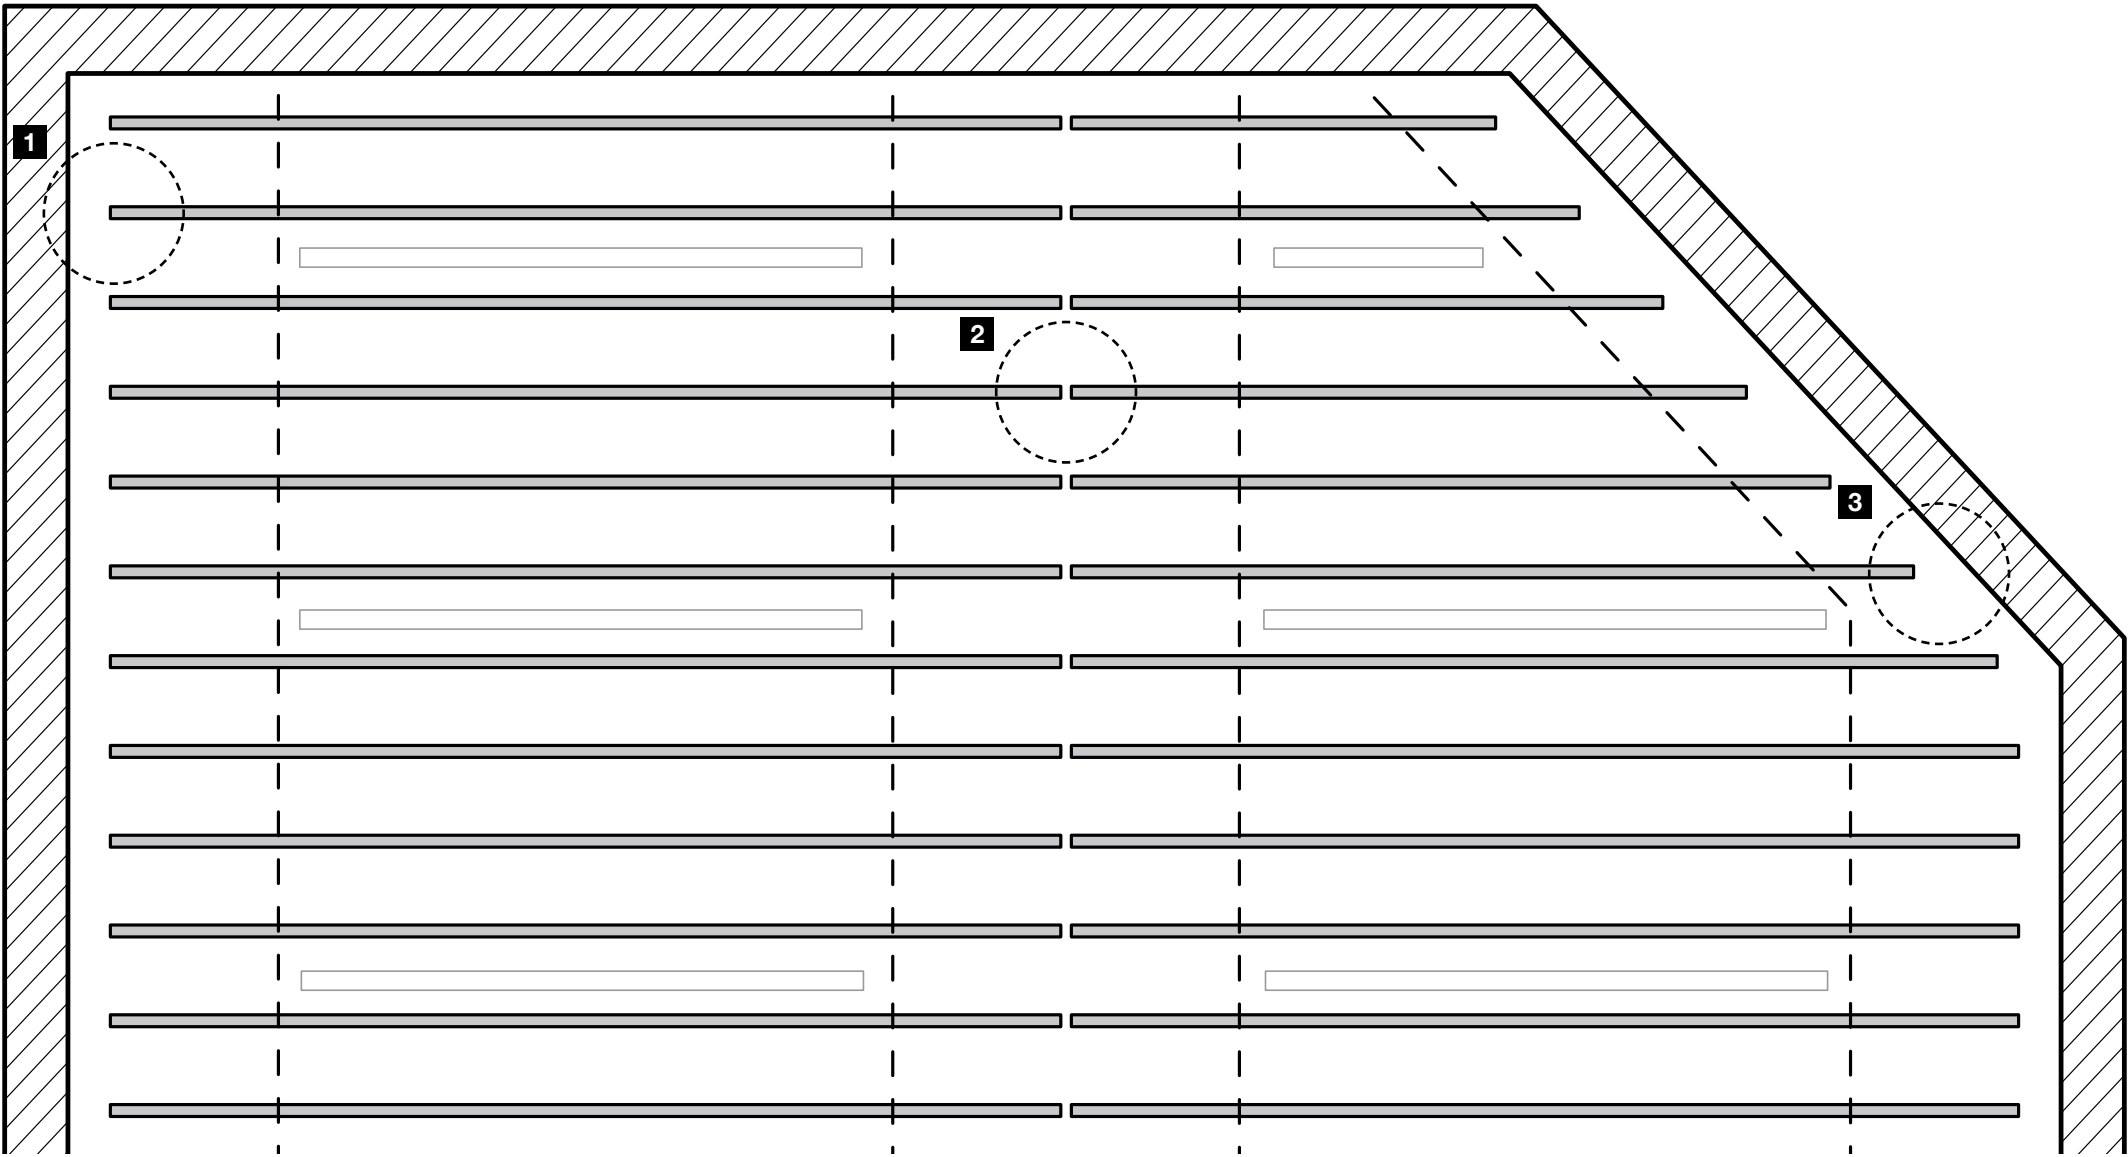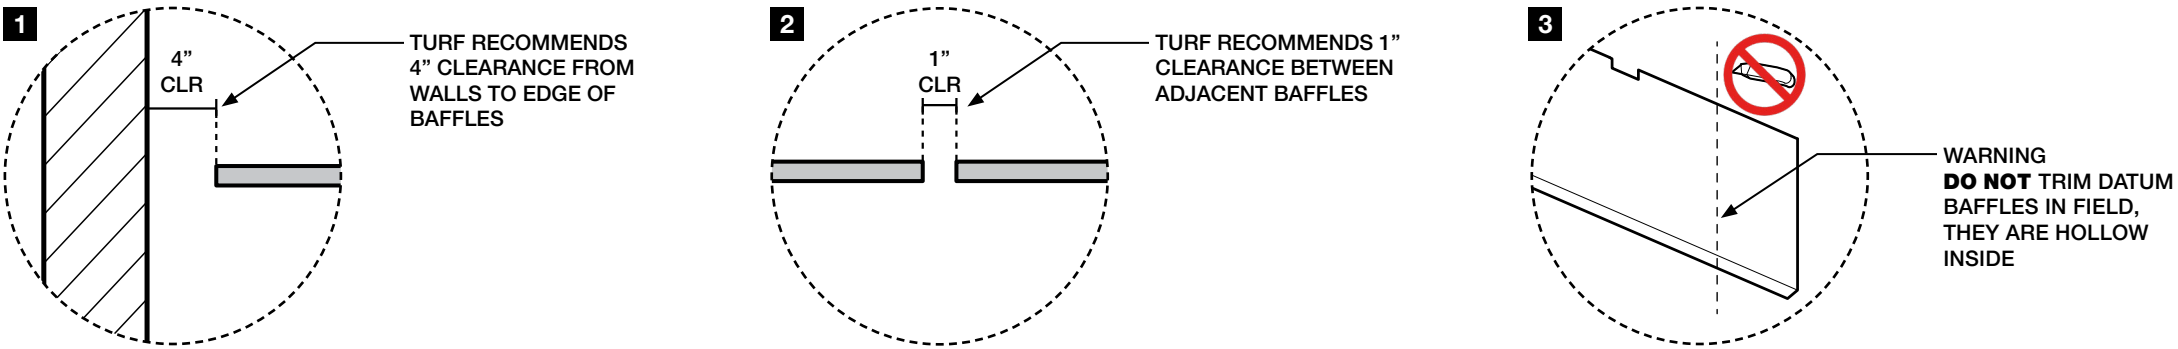

DATUM BAFFLE - EXAMPLE RCP





Tech

Acoustics	ASTM C 423-17: Type J
Fire Rating	ASTM E-84 – Class A
VOC	ASTM D5116 Compliant

Details

Lead Time	Check the Turf website for current lead times.
Warranty	Five (5) years
Maintenance	Vacuum to remove any particulate matter and air-borne debris or dust. Compressed air can be used to dust the material in difficult to reach areas for large assemblies. Contact us for more information relative to spot cleaning.
Weight	Turf products cannot support the weight of any other items in field.

Acoustic Rating

NRC = 0.90

An array of 8 sound absorbing baffles suspended by cables. Baffles were evenly distributed in a single row, spaced 12 inches apart.

Certifications



Image by The Right Exposure



Image by The Right Exposure





9mm Colors

Introducing Hues, our new 9mm color palette designed for the senses.

The 9mm PET felt board is used as our primary construction material. Select one of our coordinating neutrals to blend in, or go for a contrasting element with one of our hues.

The process used to create PET felt often results in a heathered effect where multiple tones are present. Slight variations in color should be expected when using this sustainable material.

**Felt Thickness**  
9mm +/-0.5 mm

Monitors and printers vary.  
Please request a material sample to verify felt colors.




10 TOPO GREEN




12 GRASSHOPPER




11 CELADON




63 SAFFLOWER



64 PLANTAIN




43 ORANGE CRUSH




18 ULTISOL



17 BLUSH



23 RED



15 MERLOT



50 IVORY



33 LUMINARY



83 HOLLAND OATS




82 BARLEY




34 TONAL TAUPE




35 BARK




28 INDIGO




30 CYAN




24 ROYAL BLUE




31 AZURE




27 JEAN JACKET




26 FADED DENIM



40 MAGENTA




41 DRIED LAVENDER




66 PEWTER



05 WHITE



01 CREAM




04 LIGHT GREY



98 STORM



09 DAMASCUS



06 CHARCOAL



07 BLACK





# 9mm Textures

Invite nature into your space with our wood-inspired textures. Digital printing on felt ensures a unique and realistic grain with virtually no repeats.

There is an additional product cost for Wood Textures.

Please note there is additional lead time for custom matching. Texture and customization will incur additional costs beyond our standard 9mm options.

**Felt Thickness**  
9mm +/-0.5 mm

**Monitors and printers vary.**  
Please request a material sample to verify felt colors.



D01 WHITE ASH



D02 SILVER TEAK



D03 CLEAR MAPLE




D04 WASHED ASH




D05 MEDIUM OAK



D06 PLANKED OAK

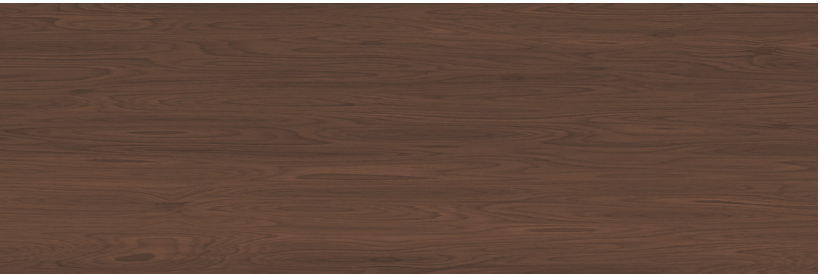

D07 DARK WALNUT

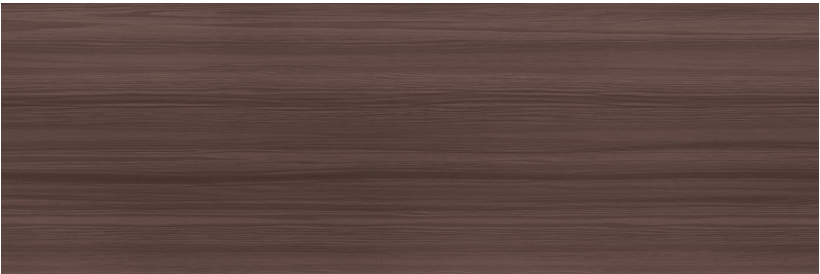

D08 BLACK PEAR