

Ceiling Scape

Metro

Patterned panels, perfected

Minimalist panels, perfected in Metro. Fitting snugly in ceiling recesses, this system offers a variety of city skyline-inspired patterns to play with. Large-scale shallow channels wrap around architectural elements for a subdued, yet stunning visual effect.




Image by The Right Exposure

How To Specify

Key Information

Metro is a series of modules that can be patterned in different ways. Consider these questions as you design your layout.

1

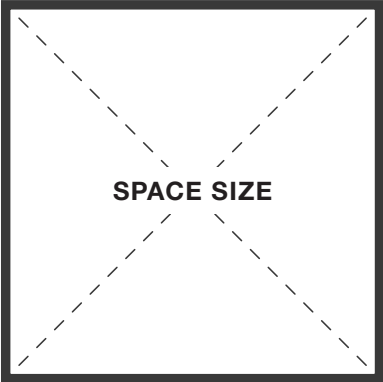


SPACE SIZE

What are the dimensions of the space?

PAGE 4

2

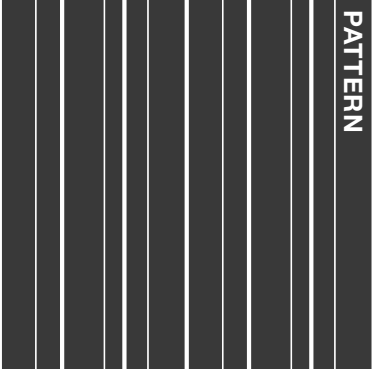


PATTERN

What pattern will the layout be?

PAGE 4

3

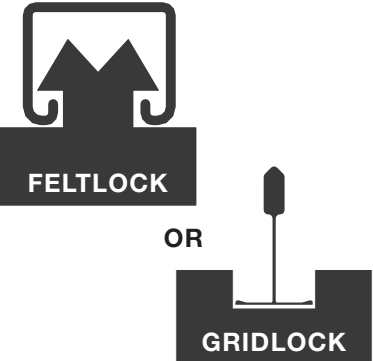

FELTLOCK


OR

GRIDLOCK

How will Metro mount to the ceiling?

PAGE 5

4




SEISMIC ZONE?

Will the project be located in a seismic zone?

PAGE 5

5

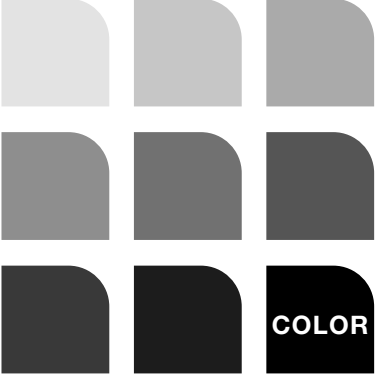

COLOR

What is the color or texture?

PAGE 8-9

Dimensions


| | |
|-----------------|--|
| Variable Length | 12”L Min - 119”L Max |
| Standard Width | 20”W |
| Standard Depth | 2”D |
| Profile Types | A, B, C & D |
| | Metro is available in four different profile types. See our “Typical Pattern Options” page for more details. |

Connection Options

| | |
|--------------------------|--|
| 9/16” or 15/16” Tee Grid | Gridlock |
| P1000 Unistrut | Feltlock |
| | See our “Connections” page for more details. |

Color

| | |
|-------------|---|
| 9mm Palette | Metro can be specified in any of our 9mm felt colors or textures. |
| Color Match | Have another color in mind? Our UV printing process can match almost any hue. |

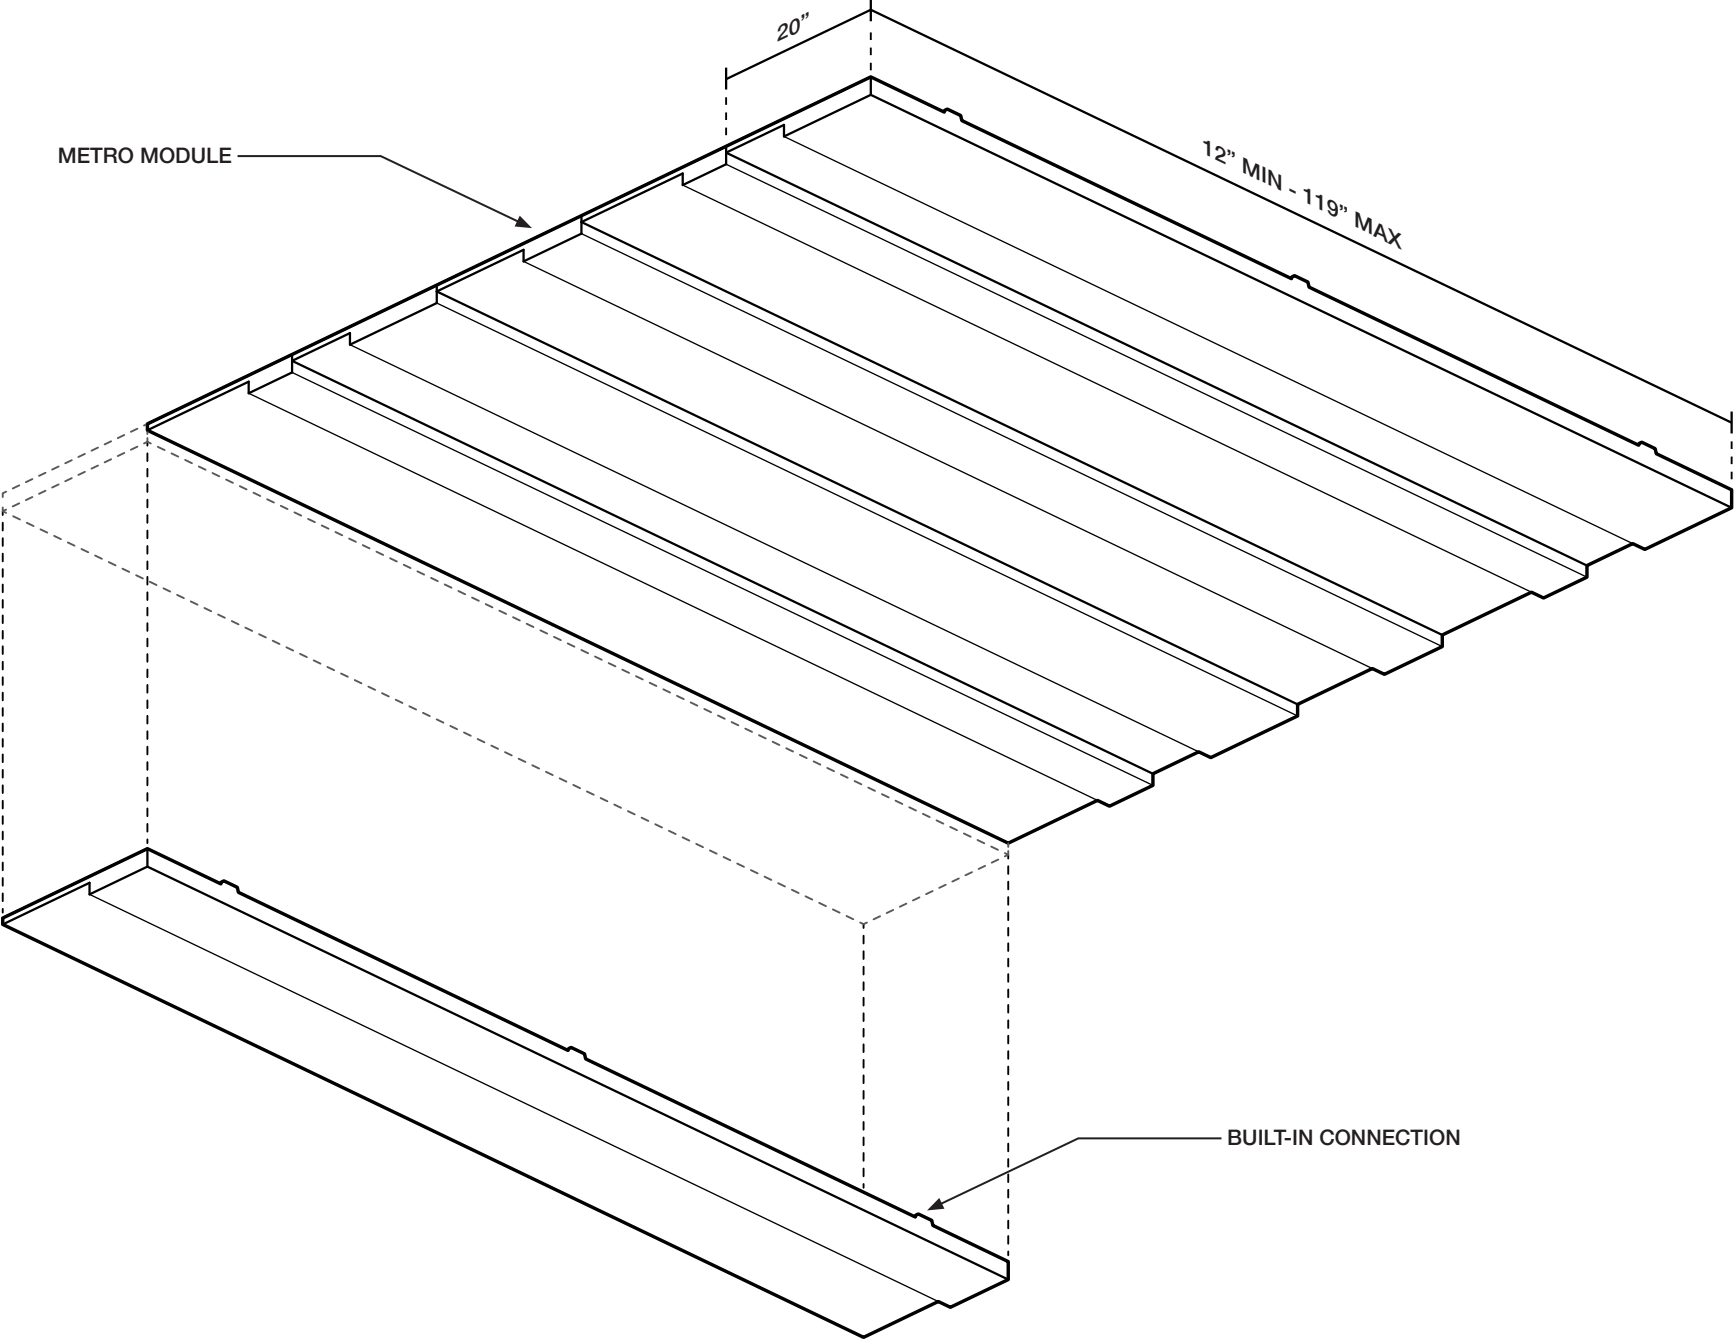

ALL DIMENSIONS NOMINAL UNLESS NOTED OTHERWISE



Typical Pattern Options

Chicago
A pattern composed of all "A" profiles creates a uniform look across your ceiling.





New York
A pattern that alternates between "C", "D", and "A" profiles creates a subtle undulation.

Houston
A pattern that alternates between "D" and "B" profiles spreads across your ceiling.


Los Angeles
A pattern that incorporates all profiles creates a varied ceiling scape.

Custom Pattern
Use the profile types as building blocks to create your own pattern.


PROFILE TYPES

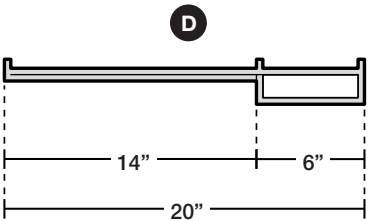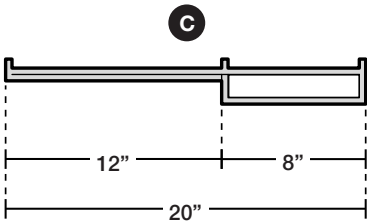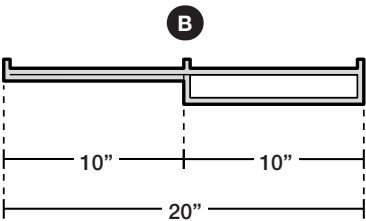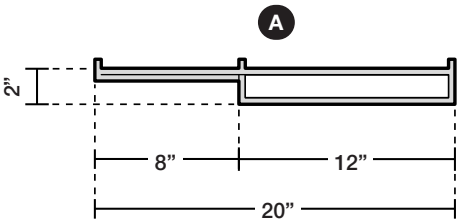


CHICAGO

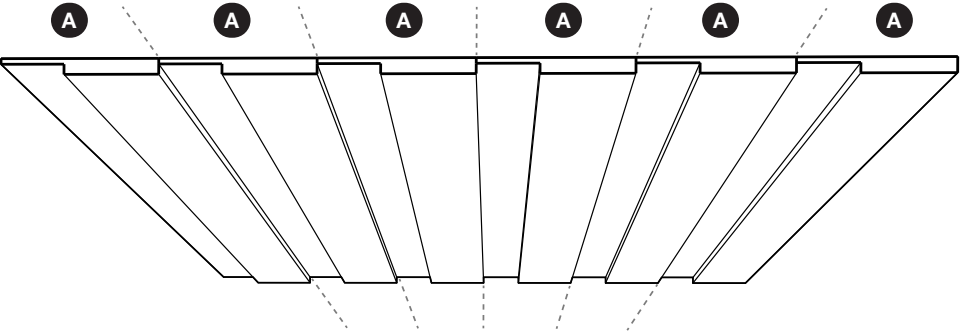


NEW YORK

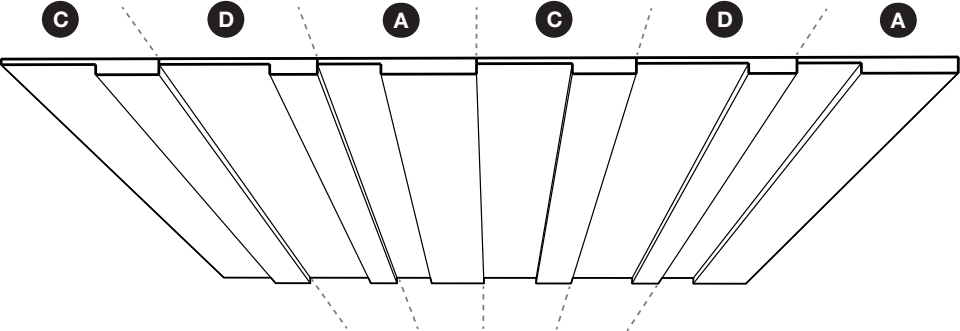

HOUSTON

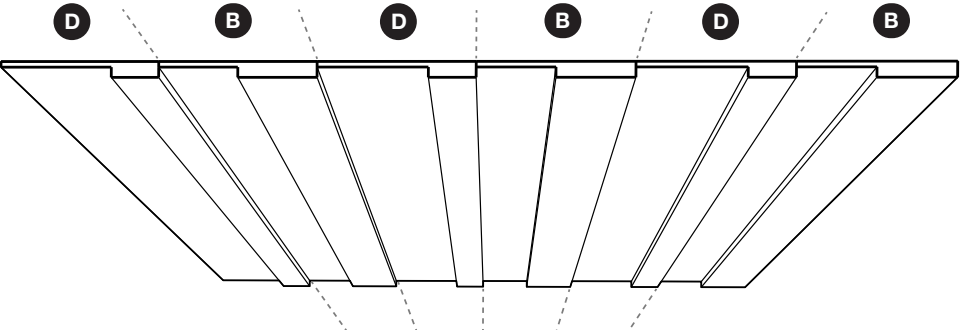

LOS ANGELES

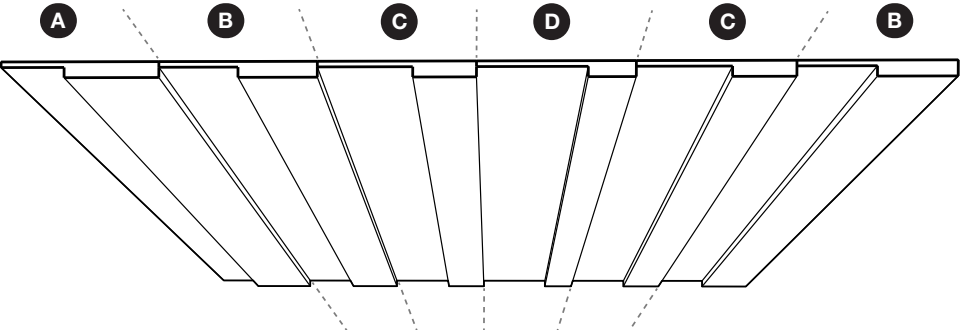

ALL DIMENSIONS NOMINAL UNLESS NOTED OTHERWISE



Connections


Connection Spacing

48" OC Max

24" OC Max Seismic Zones

Spacing varies by project. Baffles require a minimum of two connection points.

CONNECTION SPACING

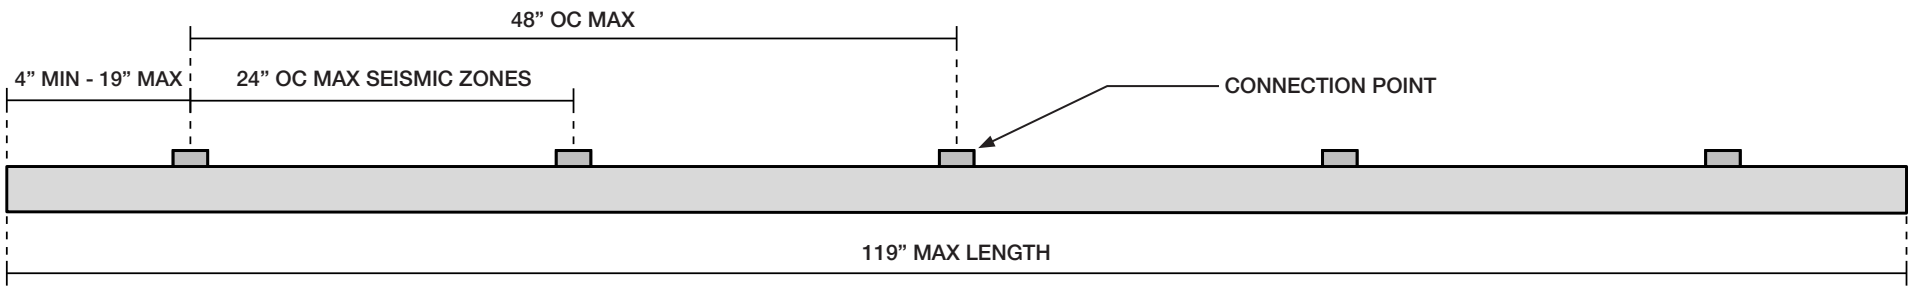


Feltlock

Products with Turf’s patented Feltlock flex and compress to insert into Unistrut.

P1000T Unistrut, raw galvanized finish or powder-coated, hardware is required.

Painted unistrut may damage Feltlock installations and will void the product warranty.

FELTLOCK

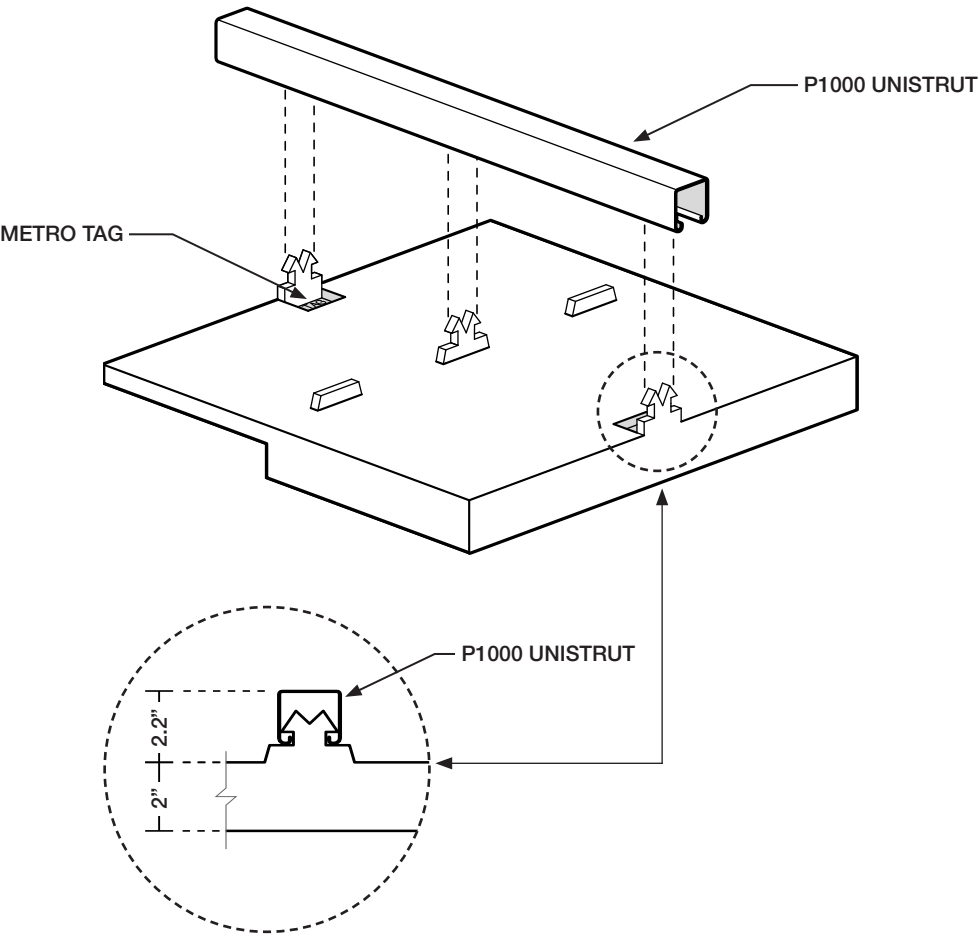


Gridlock

The Gridlock attachment flexes to grasp the tee grid.

9/16" or 15/16" flat tee grid is required.

GRIDLOCK

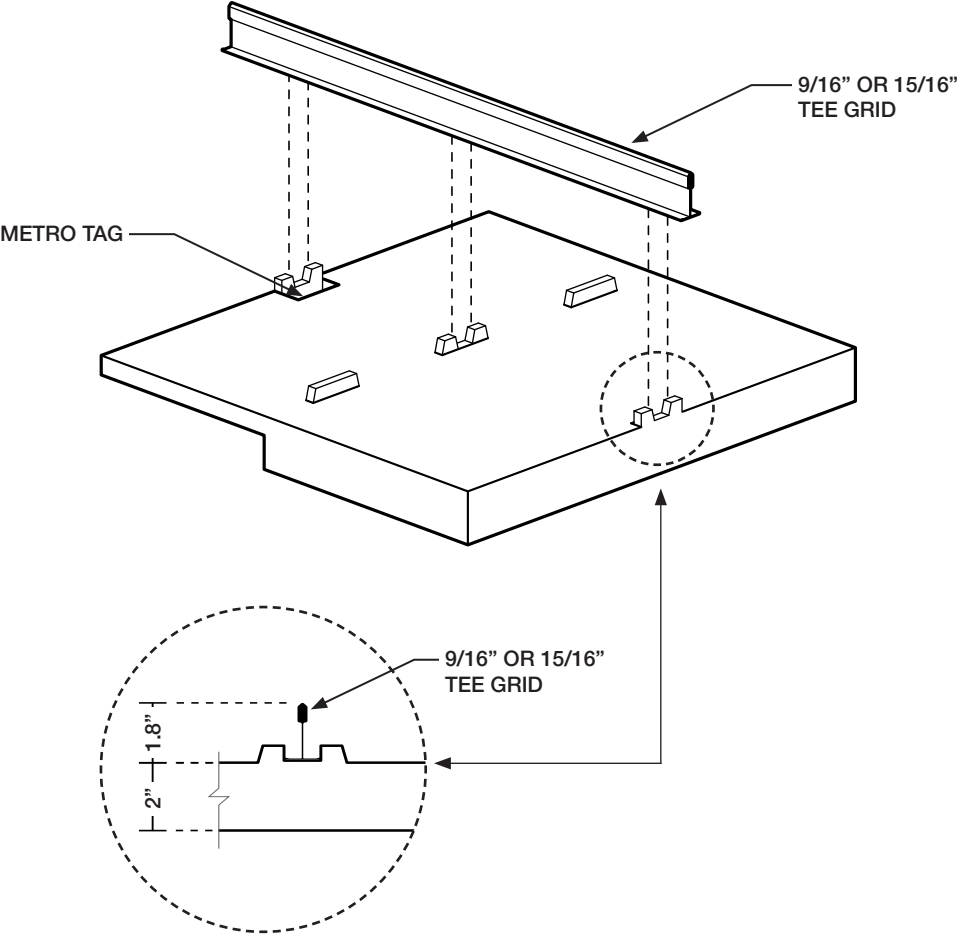

ALL DIMENSIONS NOMINAL UNLESS NOTED OTHERWISE




Field Trim Guide

Metro can accomodate trimming in field — just follow this simple guide.

1 - TRIMMABLE ZONE


MAINTAIN 1.5" CLR AROUND PERIMETER OF METRO BAFFLE & 0.5" CLR FROM CENTER SPINE WITH CONNECTIONS

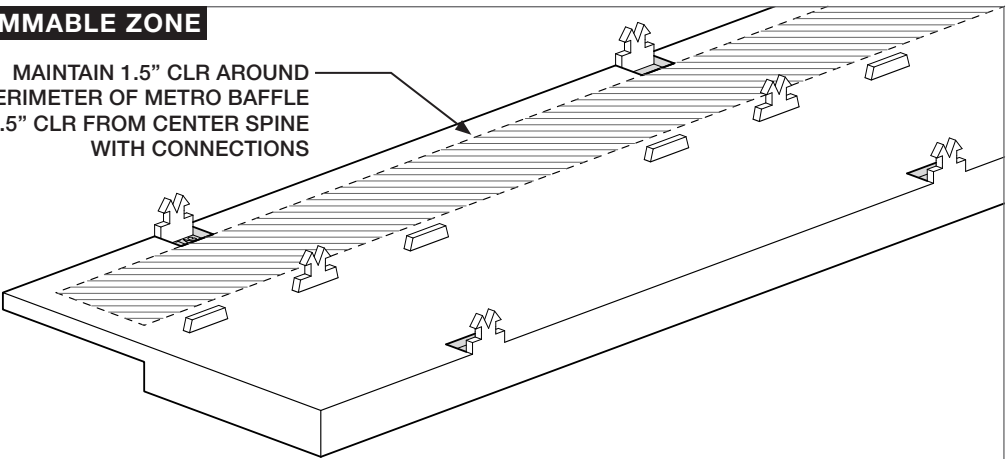

2 - CUT YOUR HOLE


CUT HOLE WITH FINISH SIDE FACING UP TO AVOID BLADE DEFLECTION

USE FELTLOCK BLOCKS AS REQUIRED TO PROTECT CONNECTIONS DURING CUTTING PROCESS

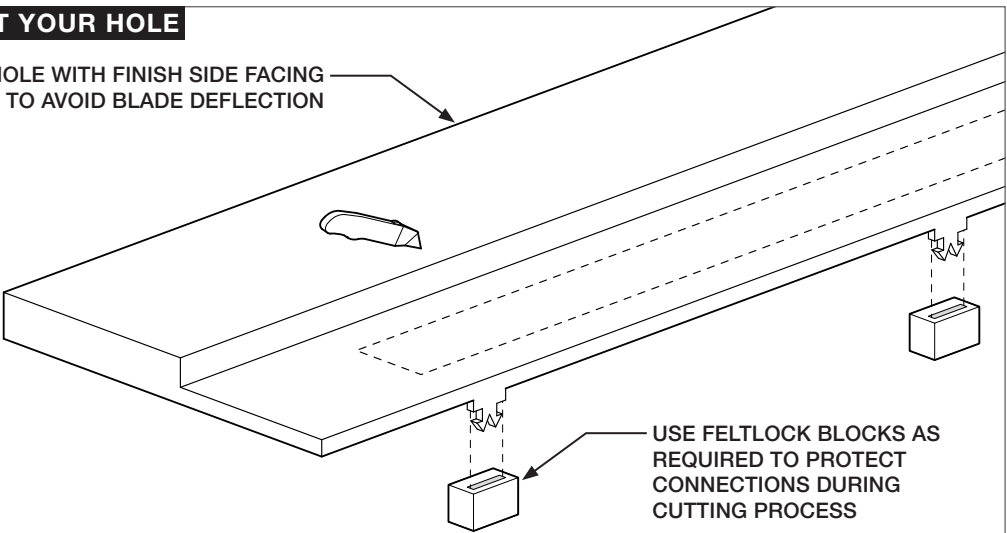


3 - ADD 1/2" SCREWS TO PANEL

ADD 1/2" SCREWS EVERY 6" ALONG EDGE OF CUTOUT

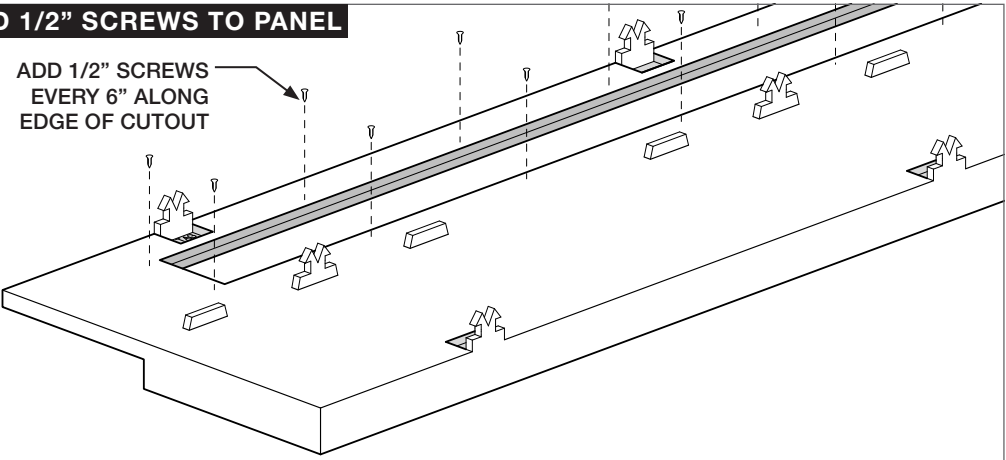

4 - FINAL PANEL

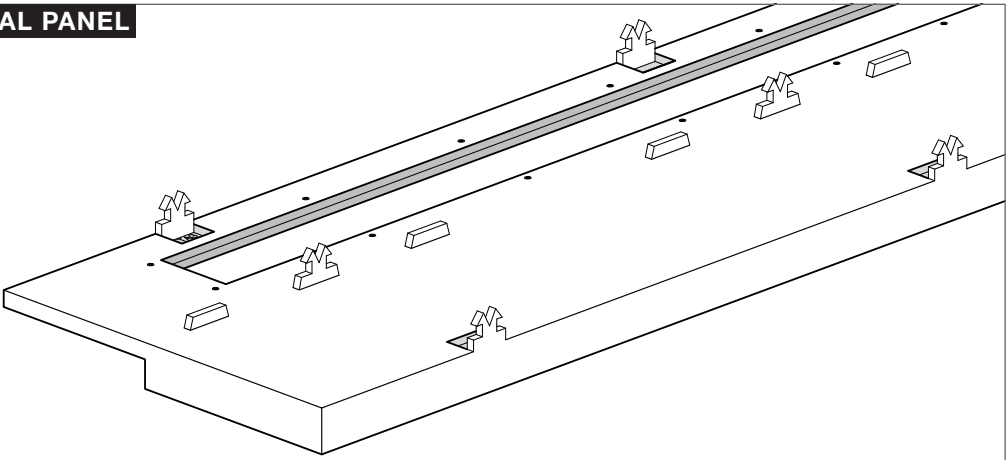

5 - DO NOT TRIM DEEP PORTION OF METRO

DEEP PORTION OF METRO BAFFLE IS HOLLOW



6 - DO NOT TRIM CONNECTIONS OR TABS

TABS & CONNECTION POINTS ARE VITAL TO METRO BAFFLE STABILITY



Tech

| | |
|-------------|-----------------------|
| Acoustics | ASTM C 423-17: Type J |
| Fire Rating | ASTM E-84 – Class A |
| VOC | ASTM D5116 Compliant |

Details

| | |
|-------------|--|
| Lead Time | Check the Turf website for current lead times. |
| Warranty | Three (3) years |
| Maintenance | Vacuum to remove any particulate matter and air-borne debris or dust. Compressed air can be used to dust the material in difficult to reach areas for large assemblies. Contact us for more information relative to spot cleaning. |
| Attachments | Turf products are not designed to support the weight of other objects or fixtures. |

Acoustic Rating

NRC = 1.20

An array of 2 sound absorbing panels suspended by cables. Modules were arranged as a single cloud with no space between panels.

Certifications



Image by The Right Exposure



Photograph by Monica Slaney

9mm Colors

Introducing Hues, our new 9mm color palette designed for the senses.

The 9mm PET felt board is used as our primary construction material. Select one of our coordinating neutrals to blend in, or go for a contrasting element with one of our hues.

The process used to create PET felt often results in a heathered effect where multiple tones are present. Slight variations in color should be expected when using this sustainable material.

Felt Thickness
9mm +/-0.5 mm

Monitors and printers vary.
Please request a material sample to verify felt colors.




10 TOPO GREEN




12 GRASSHOPPER




11 CELADON




63 SAFFLOWER



64 PLANTAIN




43 ORANGE CRUSH




18 ULTISOL




17 BLUSH



23 RED




15 MERLOT



50 IVORY



33 LUMINARY



83 HOLLAND OATS




82 BARLEY




34 TONAL TAUPE




35 BARK




28 INDIGO




30 CYAN




24 ROYAL BLUE




31 AZURE




27 JEAN JACKET




26 FADED DENIM



40 MAGENTA




41 DRIED LAVENDER




66 PEWTER



05 WHITE




01 CREAM




04 LIGHT GREY



98 STORM



09 DAMASCUS



06 CHARCOAL



07 BLACK



9mm Textures

Invite nature into your space with our wood-inspired textures. Digital printing on felt ensures a unique and realistic grain with virtually no repeats.

There is an additional product cost for Wood Textures.


Please note there is additional lead time for custom matching. Texture and customization will incur additional costs beyond our standard 9mm options.

Felt Thickness
9mm +/-0.5 mm

Monitors and printers vary.
Please request a material sample to verify felt colors.



D01 WHITE ASH

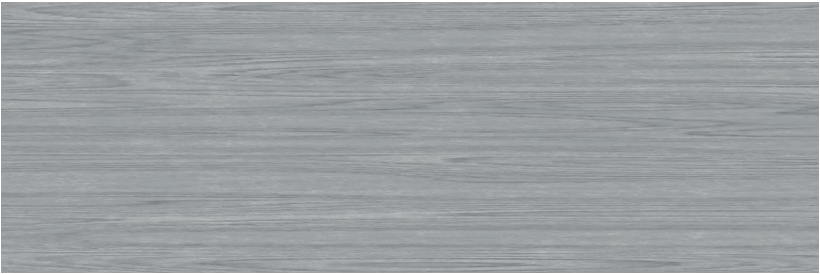

D02 SILVER TEAK



D03 CLEAR MAPLE



D04 WASHED ASH



D05 MEDIUM OAK



D06 PLANKED OAK



D07 DARK WALNUT



D08 BLACK PEAR