Wall Scape

Wave


Waves of sound


Sound absorbing waves ripple through the walls. Undulating lines, shallow and deep, create a rhythmic surface that filters sound flow.



Photo by Kendall McCaugherty, Hall+Merrick+McCaugherty

How To Specify

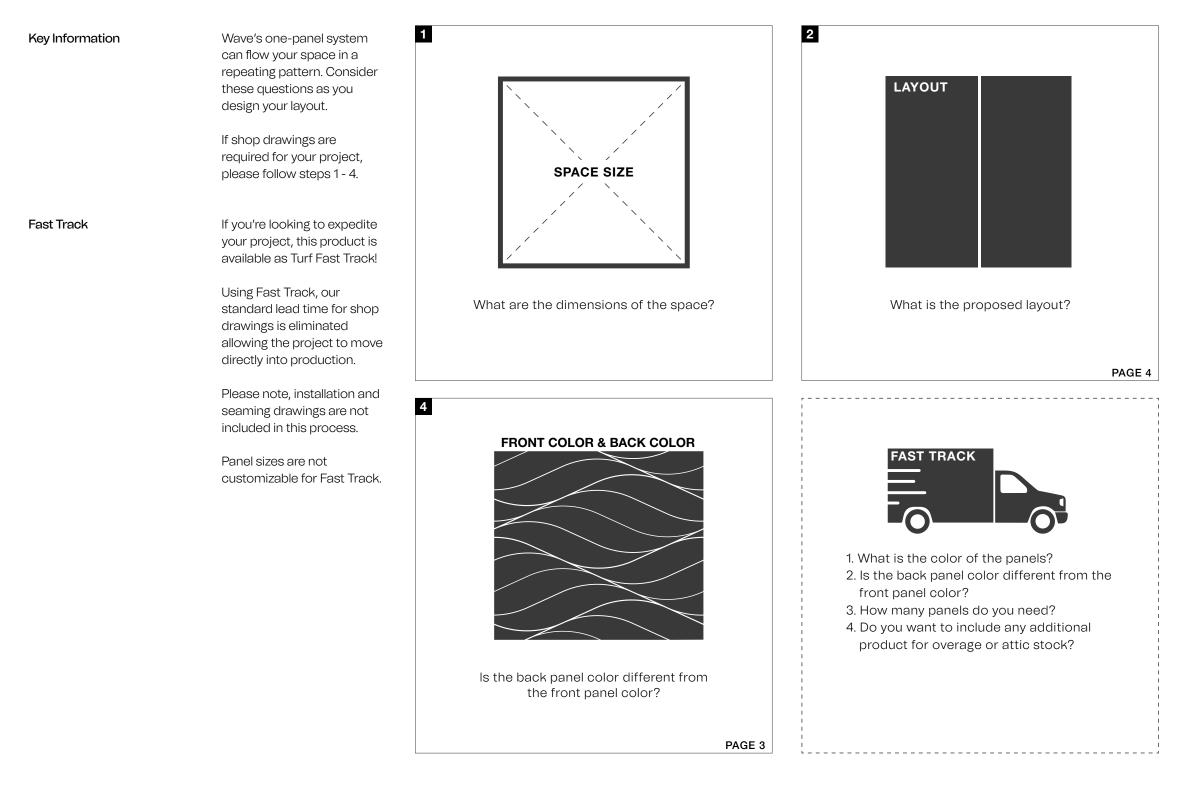

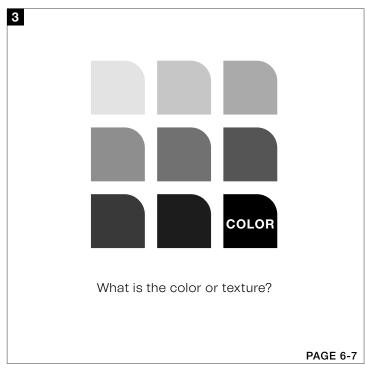

Dimensions


48"W x 120"L x 18mm D Standard Panel Size

Connection Options

Connection By Others	Construction adhesive
	Panels should be installed with construction grade adhesive specified by the contractor.
Color	
9mm Palette	Any of our 9mm felt colors or Stone Textures can be used for Wave.
	Soc Elevation ^o Section


See Elevation & Section Details on this page for more information.

Tools Required

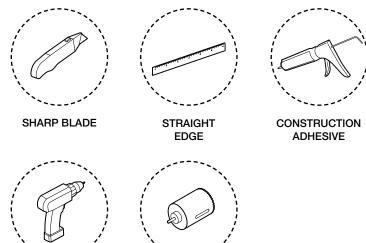


DRILL


HOLE SAW

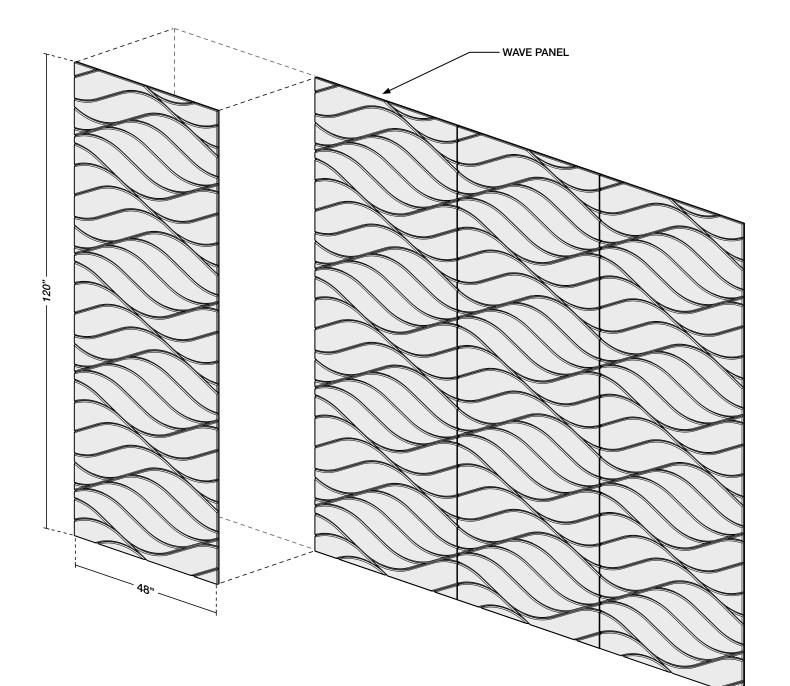


ELEVATION DETAIL

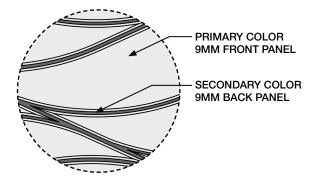

SECTION DETAIL

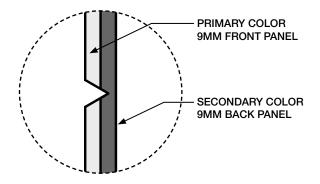

FIELD TRIM DETAIL



TRIM IN FIELD AS REQUIRED

TO CUT CIRCULAR HOLES, TURF RECOMMENDS USING A HOLE SAW IN REVERSE FOR A CLEANER EDGE


ALL DIMENSIONS NOMINAL UNLESS NOTED OTHERWISE

Typical Layouts


Panel Types

Inspired by ocean tides, Wave offers a single panel that can be repeated to create a seamless layout in any space.

VERTICAL LAYOUT

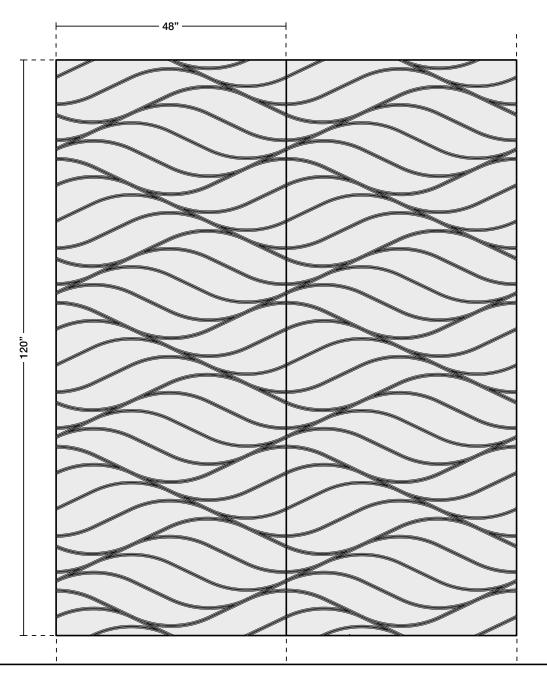

HORIZONTAL LAYOUT

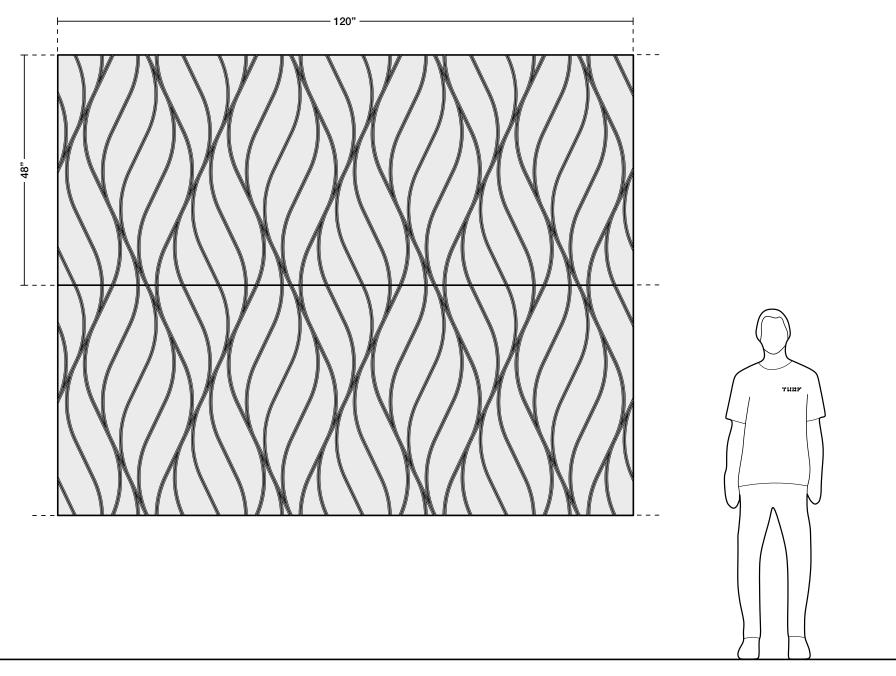

7

ALL DIMENSIONS NOMINAL UNLESS NOTED OTHERWISE

Tech

Acoustic Rating

NRC = 0.55

ASTM C423-17: Type A Acoustics

VOC

Fire Rating

ASTM E-84 – Class A

ASTM D5116 Compliant

The NRC value was tested with a 12′ x 10′ array of sound absorbing panels. 3 full size panels aligned side-by-side, directly mounted to the wall.

Details

Certifications

Check the Turf website for Lead Time current lead times. Warranty Five (5) years Vacuum to remove any Maintenance particulate matter and air-borne debris or dust. Compressed air can be used to dust the material in difficult to reach areas for large assemblies. Contact us for more information relative to spot cleaning.

Turf products cannot

other items in field.

support the weight of any

Weight



Declare.



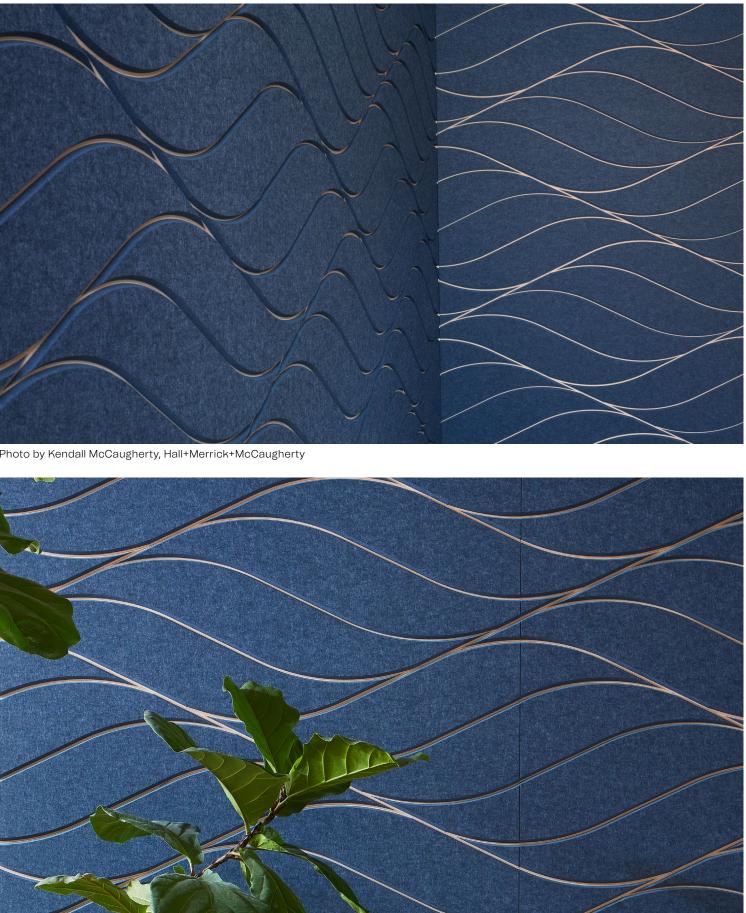




Photo by Kendall McCaugherty, Hall+Merrick+McCaugherty

9mm Colors

Introducing Hues, our new 9mm color palette designed for the senses.


The 9mm PET felt board is used as our primary construction material. Select one of our coordinating neutrals to blend in, or go for a contrasting element with one of our hues.

The process used to create PET felt often results in a heathered effect where multiple tones are present. Slight variations in color should be expected when using this sustainable material.

Felt Thickness 9mm +/-0.5 mm

Monitors and printers vary. Please request a material sample to verify felt colors.





64 PLANTAIN





28 INDIGO



40 MAGENTA



98 STORM





33 LUMINARY



30 CYAN



41 DRIED LAVENDER



09 DAMASCUS

9mm Stone Textures


Inspired by nature, designed for felt. Our digitally printed Stone Textures capture the character and nuance of stone on top of a curated color collection from our Hues palette with virtually no repeats. The three patterns in this family each capture unique elements from the stones for which they are named.

There is an additional product cost for Stone Textures.

Turf has curated this collection to include only the best pattern and color combinations.

Felt Thickness 9mm +/-0.5 mm

Monitors and printers vary. Please request a material sample to verify felt colors.



Texture Edge Detail

Please note, all cut edges will reveal the base color of the felt if using a 9mm Stone Texture.

ST34 Granite used as an example above.



ST05 MARBLE



ST50 MARBLE



ST05 TRAVERTINE



ST17 TRAVERTINE



ST18 TRAVERTINE



ST17 GRANITE



ST18 GRANITE







ST01 MARBLE



ST83 MARBLE

ST01 TRAVERTINE

ST66 MARBLE



ST50 TRAVERTINE



ST66 TRAVERTINE



ST11 TRAVERTINE



ST11 GRANITE



ST10 GRANITE



ST40 GRANITE





ST83 TRAVERTINE

ST34 TRAVERTINE



ST34 GRANITE



ST35 GRANITE



ST41 GRANITE



ST64 MARBLE



ST26 MARBLE



ST64 TRAVERTINE



ST63 TRAVERTINE



ST26 TRAVERTINE



ST63 GRANITE



ST28 GRANITE

