

1512 S BATAVIA AVENUE
GENEVA, IL 60134
630-232-0104

An  ALION Technical Center

RIVERBANK.ALIONSCIENCE.COM

FOUNDED 1918 BY
WALLACE CLEMENT SABINE

Test Report

FOR: **Turf Design**
Elgin, IL

Sound Absorption
RAL™-A18-324

Page 1 of 7

CONDUCTED: 2018-09-28

ON: Crease Type A ceiling tiles

TEST METHOD

Riverbank Acoustical Laboratories™ is accredited by the U.S. Department of Commerce, National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP) as an ISO 17025:2005 Laboratory (NVLAP Lab Code: 100227-0) and for this test procedure. The test reported in this document conformed explicitly with ASTM C423-17: "Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method." The specimen mounting was performed according to ASTM E795-16: "Standard Practices for Mounting Test Specimens During Sound Absorption Tests." A description of the measuring procedure and room qualifications is available upon request.

DESCRIPTION OF THE SPECIMEN

The test specimen was designated by the manufacturer as Crease Type A ceiling tiles. A full external visual inspection performed on the test specimen by Riverbank personnel verified the manufacturer's description.

Panel

Trade Name:	Crease, Type A
Material ID:	04230
Materials:	Formed polyethylene terephthalate felt
Dimensions:	16 @ 609.6 mm (24 in.) x 609.6 mm (24 in.)
Wall Thickness:	5 mm (0.197 in.)
Overall Thickness:	Minimum @ 57.15 mm (2.25 in.) Maximum @ 149.22 mm (5.875 in.)
Overall Weight:	11.45 kg (25.25 lbs)
Installation:	Arranged such that crease (line of minimum thickness) orientations are perpendicular between any two adjacent tiles

Physical Measures

Size:	2.44 m (96.0 in) wide by 2.44 m (96.0 in) long
Thickness:	0.15 m (5.875 in)
Weight:	11.45 kg (25.25 lbs)
Mass per Unit Area:	1.93 kg/m² (0.39 lbs/ft²)
Calculation Area:	5.946 m² (64 ft²)

Test Environment

Room Volume:	291.98 m³
Temperature:	20.9 °C ± 0.0 °C (Requirement: ≥ 10 °C and ≤ 5 °C change)
Relative Humidity:	67.1 % ± 0.4 % (Requirement: ≥ 40 % and ≤ 5 % change)
Barometric Pressure:	99.3 kPa (Requirement not defined)



RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2005 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT. THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.

1512 S BATAVIA AVENUE
GENEVA, IL 60134
630-232-0104

An ALION Technical Center

RIVERBANK.ALIONSCIENCE.COM

FOUNDED 1918 BY
WALLACE CLEMENT SABINE

Test Report

Turf Design
2018-09-28

RAL™-A18-324

Page 2 of 7



Figure 1 – Specimen mounted in test chamber



Figure 2 – Detail of individual tile

1512 S BATAVIA AVENUE
GENEVA, IL 60134
630-232-0104

An  ALION Technical Center

RIVERBANK.ALIONSCIENCE.COM

FOUNDED 1918 BY
WALLACE CLEMENT SABINE

Test Report

Turf Design
2018-09-28

RAL™-A18-324

Page 3 of 7

MOUNTING METHOD

Type E-400 Mounting: The test specimen was mounted with an airspace behind it. The number designates the distance in mm from the exposed face of the test specimen to the test surface, rounded to the nearest integer multiple of 5. For the purposes of this report, the mounting designation uses the point on the specimen face where minimum overall thickness was measured for reference. Perimeter edges were sealed with metal framing.

TEST RESULTS

1/3 Octave Center

Frequency (Hz)	Total Absorption (m ²)	Total Absorption (Sabins)	Absorption Coefficient
100	4.64	49.94	0.78
** 125	6.98	75.10	1.17
160	4.71	50.68	0.79
200	5.76	61.97	0.97
** 250	5.51	59.32	0.93
315	5.24	56.37	0.88
400	4.54	48.88	0.76
** 500	4.88	52.57	0.82
630	5.44	58.59	0.92
800	5.41	58.25	0.91
** 1000	5.69	61.25	0.96
1250	5.67	61.02	0.95
1600	5.76	61.99	0.97
** 2000	5.66	60.96	0.95
2500	5.65	60.86	0.95
3150	5.70	61.34	0.96
** 4000	5.93	63.80	1.00
5000	5.85	62.97	0.98

SAA = 0.91

NRC = 0.90

1512 S BATAVIA AVENUE
GENEVA, IL 60134
630-232-0104

An ALION Technical Center

RIVERBANK.ALIONSCIENCE.COM

FOUNDED 1918 BY
WALLACE CLEMENT SABINE

Test Report

Turf Design

2018-09-28

RAL™-A18-324

Page 4 of 7

TEST RESULTS (Continued)

The sound absorption average (SAA) is defined in ASTM C423-17 Section 3.1.1 as the average, rounded to the nearest integer multiple of 0.01, of the sound absorption coefficients of a material for the twelve one-third octave bands from 200 Hz through 2500 Hz, inclusive.

The noise reduction coefficient (NRC) is defined from previous versions of ASTM C423 as the average of the sound absorption coefficients at 250 Hz, 500 Hz, 1000 Hz, and 2000 Hz, expressed to the nearest integer multiple of 0.05.


Tested by


Marc Sciaky
Experimentalist

Report by


Malcolm Kelly
Acoustician

Approved by


Eric P. Wolfram
Laboratory Manager

1512 S BATAVIA AVENUE
GENEVA, IL 60134
630-232-0104

An  ALION Technical Center

RIVERBANK.ALIONSCIENCE.COM

Test Report

FOUNDED 1918 BY
WALLACE CLEMENT SABINE


Turf Design
2018-09-28

RAL™-A18-324

Page 5 of 7

SOUND ABSORPTION REPORT

Crease Type A ceiling tiles

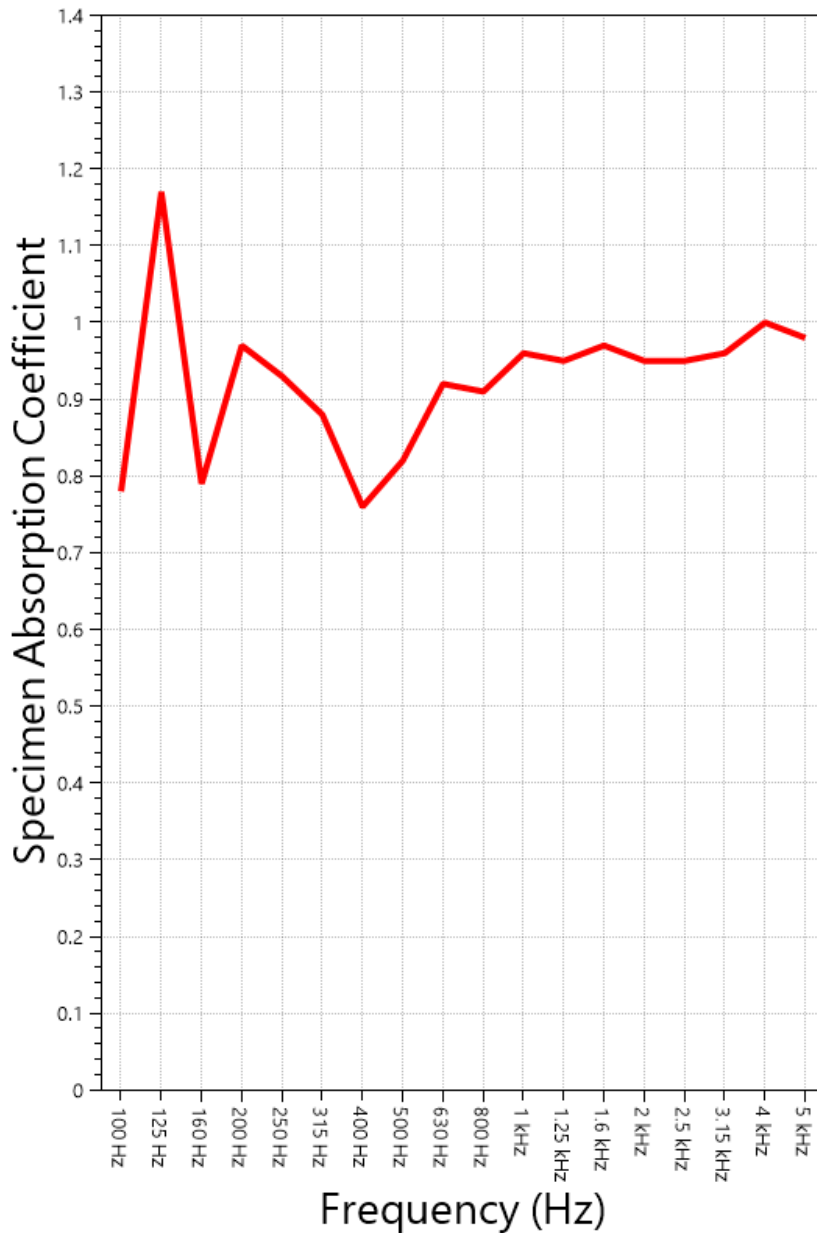

SAA = 0.91

NRC = 0.90

1512 S BATAVIA AVENUE
GENEVA, IL 60134
630-232-0104

An  ALION Technical Center

RIVERBANK.ALIONSCIENCE.COM

Test Report

FOUNDED 1918 BY
WALLACE CLEMENT SABINE

Turf Design
2018-09-28

RAL™-A18-324

Page 6 of 7

APPENDIX A: Extended Frequency Range Data

Specimen: Crease Type A ceiling tiles (See Full Report)

The following non-accredited data were obtained in accordance with ASTM C423-17, but extend beyond the defined frequency range of 100Hz to 5,000Hz. These unofficial results are representative of the RAL test environment only and intended for research & comparison purposes.

1/3 Octave Band Center Frequency (Hz)	Total Absorption (Sabins)	Absorption Coefficient
31.5	17.48	0.27
40	15.02	0.23
50	25.77	0.40
63	49.22	0.77
80	23.11	0.36
100	49.94	0.78
125	75.10	1.17
160	50.68	0.79
200	61.97	0.97
250	59.32	0.93
315	56.37	0.88
400	48.88	0.76
500	52.57	0.82
630	58.59	0.92
800	58.25	0.91
1000	61.25	0.96
1250	61.02	0.95
1600	61.99	0.97
2000	60.96	0.95
2500	60.86	0.95
3150	61.34	0.96
4000	63.80	1.00
5000	62.97	0.98
6300	63.70	1.00
8000	65.01	1.02
10000	66.34	1.04
12500	64.52	1.01

1512 S BATAVIA AVENUE
GENEVA, IL 60134
630-232-0104

An ALION Technical Center

RIVERBANK.ALIONSCIENCE.COM

FOUNDED 1918 BY
WALLACE CLEMENT SABINE

Test Report

Turf Design
2018-09-28

RAL™-A18-324

Page 7 of 7

APPENDIX B: Instruments of Traceability

Specimen: Crease Type A ceiling tiles (See Full Report)

<u>Description</u>	<u>Model</u>	<u>Serial Number</u>	<u>Date of Certification</u>	<u>Calibration Due</u>
System 1	Type 3160-A-4/2	3160- 106968	2018-08-09	2019-08-09
Bruel & Kjaer Mic And Preamp C	Type 4943-B-001	2311439	2018-03-27	2019-03-27
Bruel & Kjaer Pistonphone	Type 4228	2781248	2018-08-06	2019-08-06
Omega Digital Temp., Humid. And Pressure Recorder	OM-CP- PRHTemp2000	P97844	2018-02-03	2019-02-03

END