

Halliburton Otis® D Running Tool

The Halliburton Otis® D Running Tool sets the type D collar lock mandrel in the tubing collar recesses of EUE (or similar) type tubing.


The running tool consists of a top sub with fishing neck and sucker rod pin connection, a core, a main body, and a dog (collet) set.

The D collar lock mandrel being deployed by the Halliburton Otis® D Running Tool is first located in the coupling recess. Then, upward jarring sets the lock, and continued upward jarring shears the pin in the running tool, enabling the release from the type D collar lock.

Halliburton Otis® D Running Tool

Used to Run	Nominal Size	Fishing Neck on Tool	Fishing Neck Will Engage	Connection	Part Number	SAP Part Number
Type O Collar Lock Mandrel	2.000 in.	1.375 in.	0.906 in.	15/16 in. 10 UN	41D010	101056970
	2.500 in.	1.750 in.	1.334 in.	15/16 in. 10 UN	41D011	101056971
	3.000 in.	1.750 in.	1.688 in.	1 1/16 in. 10 UN	41D09	101056973
	4.0 in.	2.31 in.	2.62 in.	1 1/16 in. 10 UN	41D015	101056972

Spares components are available. Please specify part and assembly part number or part number if known.

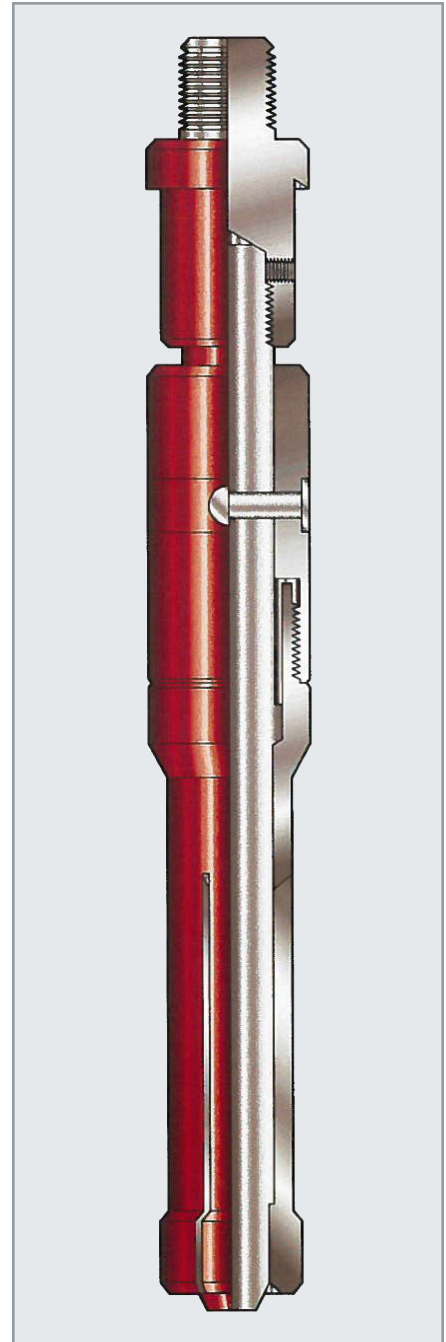

**For more information, contact your local
Halliburton representative.**