

175 MaxForce® Perforating Shaped Charge

2 7/8-in. 6spf, 3 1/8-in. 6spf, and 4 5/8-in. 12spf Perforating Gun Systems


The 175 MaxForce® perforating shaped charge represents Halliburton's newest family of shaped charges, exemplifying the company's reputation for unmatched jet-perforating capabilities. MaxForce charges consistently provide superior performance for establishing reservoir connectivity for maximum production.

Operators choosing the 175 MaxForce charge will obtain the deepest penetrating performance when selecting a 2 7/8-in. or 4 5/8-in. wireline- or tubing-conveyed perforating system. Halliburton uses scientific expertise and technological innovation in its shaped-charge design and manufacturing methods to achieve the industry's deepest-penetrating shaped charge on the market. Rigorous quality control processes are followed to ensure each charge operates as designed, reliably providing clean, clear, and efficient conduits for reservoir production.

MaxForce charges represent the optimum deep-penetrating shaped charge for operators who want results.

Benefits

- Provides maximum production and injection ability
- Penetrates deeper in stressed rocks
- Improves perforation tunnel volume
- Penetrates past near-wellbore damage
- Minimizes perforating-gun debris
- Provides inventory flexibility from multisystem charge

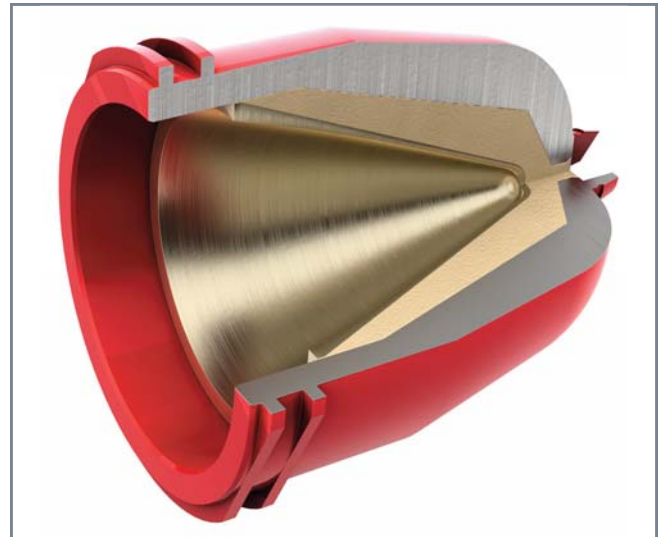

The 175 MaxForce charge is the deepest penetrating charge in its class.

Applications

- Natural well completions
- Prestimulation perforating
- Disposal and injector wells
- Well recompletion

Features



- Deepest-penetrating shaped charge for 2 7/8-in. 6spf and 4 5/8-in. 12spf perforating systems
- Patented Twist-Lock case for quick, easy, and accurate installation
- Proprietary design maximizes downhole performance at reservoir conditions

HAL36683

Performance Data

175 MaxForce Charge (101826652)									
Gun Size (in.)	Shot Density spf (spm)	Phasing (degree)	JRC P/N	Charge Name	Penetration in. (cm)	Entrance Hole in. (mm)	Casing (in.)	Explosive Load (g)	Test Type
2-7/8	6 (20)	60	101826652	175 MaxForce, HMX	38.6 (98.0)	0.37 (9.4)	4-1/2	17.5	19B
3-1/8	6 (20)	60	101826652	175 MaxForce, HMX	44.0 (111.7)	0.37 (9.4)	4-1/2	17.5	QC
4-5/8	12 (39)	145	101826652	175 MaxForce, HMX	34.8 (88.4)	0.36 (9.1)	7	17.5	19B

API 19B Section I Performance Summary of the 175 MaxForce Shaped Charge

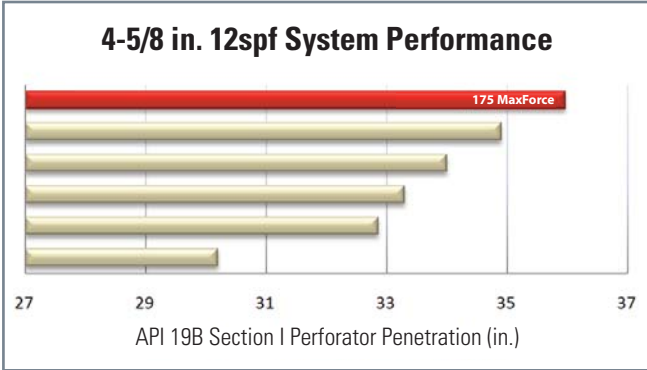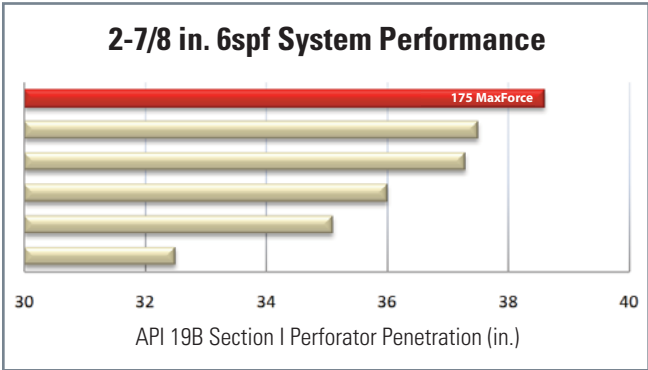

175 MaxForce is the industry's deepest-penetrating charge for 2 7/8-in. 6spf and 4 5/8-in. 12spf perforating system.

For additional information,
please contact your local Halliburton Business Development Representative.

© 2012 Halliburton. All rights reserved. Sales of Halliburton products and services will be in accord solely with the terms and conditions contained in the contract between Halliburton and the customer that is applicable to the sale. H08763 2/12