

SAND CONTROL | INFLOW CONTROL TECHNOLOGY



EquiFlow[®] adjustable nozzle inflow control device

FEATURES

- No moving parts
- No elastomers
- Externally adjustable
- Injection and production capable

BENEFITS

- Allows for last minute changes to flow resistivity
- Final flow profile configuration can be decided later in the project
- Allows for re-configuration of the EquiFlow ICD to fit other applications and projects

Overview

Today's reservoir challenges call for optimum completion solutions, and since no two reservoirs are alike, having multiple options can be a significant advantage. The Halliburton EquiFlow[®] adjustable nozzle inflow control device (ICD) combines the benefits of inflow balancing with the flexibility to reconfigure the ICD as needed.

Differences in influx from the reservoir can result in premature water or gas breakthrough, leaving valuable reserves in the ground. EquiFlow ICDs are designed to improve completion performance and efficiency by balancing inflow throughout the length of a completion. Placement of ICDs is typically determined during the design phase of a project, but operators often face applications where design flexibility is needed. The EquiFlow adjustable nozzle ICD allows operators to configure the tools closer to the time of installation.

Adjustable nozzle ICDs improve logistics and help reduce delivery time since the tools can be stocked with the confidence that a wide range of configurations is available to meet most well requirements. This allows for determination of the final ICD profile later in the project, such as when the operator receives updated well data during the drilling operations from MWD/LWD. With this reconfiguration capability, backup devices can be used in other applications or projects beyond that which was originally planned.


The EquiFlow adjustable nozzle ICD comes in a range of settings with the flexibility to easily set an indefinite number of times without having to open the tool or use special tools.



EQUIFLOW® ADJUSTABLE NOZZLE ICD

Basepipe OD (in.)	2 7/8	3 1/2	4	4 1/2	5	5 1/2	6 5/8	7
ICD OD (in.)	4.00	4.625	5.125	5.625	6.125	6.625	7.75	8.125
Nozzle ICD Assembly Length (in.)	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
Standard Metallurgy*	316L	316L	316L	316L	316L	316L	316L	316L
Standard Temperature Rating** °F (°C)	325 (160)	325 (160)	325 (160)	325 (160)	325 (160)	325 (160)	325 (160)	325 (160)
Units Per Well	Simulation used for optimization							
Flow Rate Through Each Unit	Dependent on ICD settings							
Reservoir Pressure	No limitations							

*Additional metallurgies available upon request
**Higher ratings available upon request

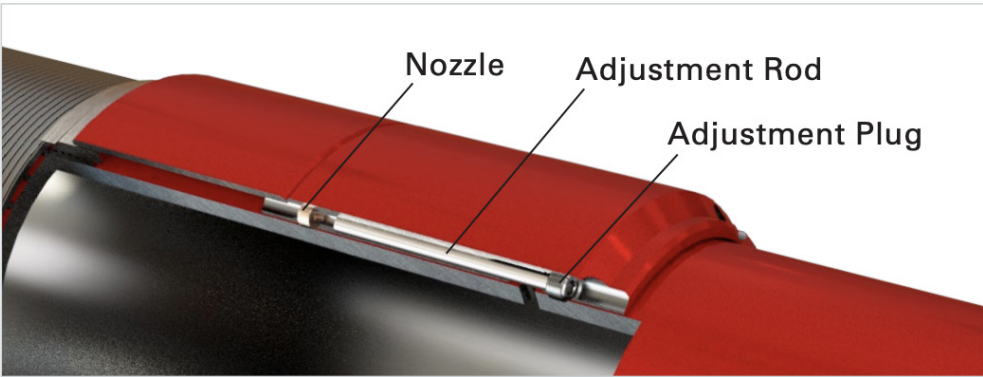

Flow path is closed with adjustment rod



Removing adjustment rod opens nozzle to flow

For more information, contact your local Halliburton representative or visit us on the web at www.halliburton.com

Sales of Halliburton products and services will be in accord solely with the terms and conditions contained in the contract between Halliburton and the customer that is applicable to the sale.

H010897 11/24 © 2024 Halliburton. All Rights Reserved.