


OUTDOOR FIXTURES



eiko.com

LIGHTING THE GREAT OUTDOORS.

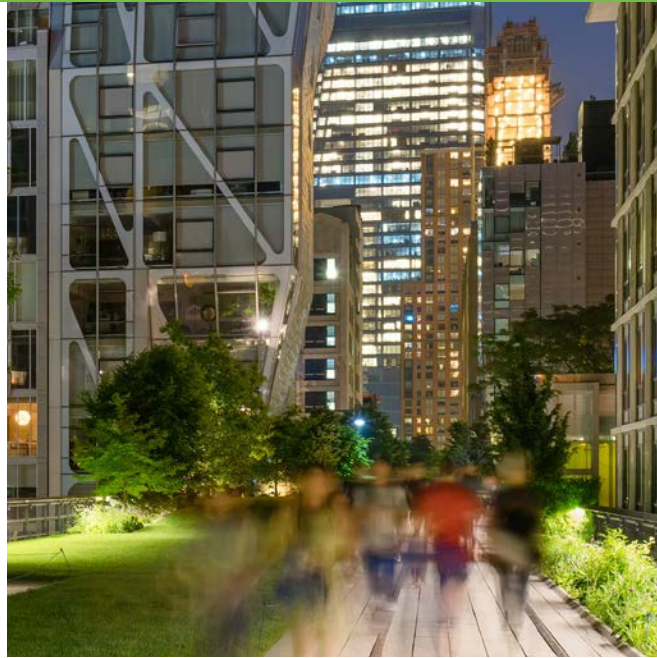

Customers everywhere are turning to LED fixtures for their unprecedented energy efficiency and long life.

LEDs provide lower energy consumption and reduced maintenance costs due to less frequent replacement.

EiKO carries a broad range of outdoor lighting fixtures to replace conventional systems, including multi-use site and area lights, flood lights, wallpacks, industrial and security lighting.

Find out more at EIKO.COM!

OUTDOOR LIGHTING SOLUTIONS




VERT
Site Lighting Platform



FLJ
Utility Flood Light



SIGNAL
Flood Light & Highbay

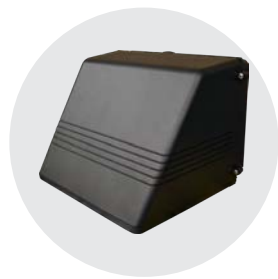

WALLPACKS
Site Lighting Platform



SCRG
Surface Canopy Round Garage



VTS
Vapor Tight Surface



VERT : SITE LIGHTING PLATFORM

VERT fixtures are cost-effective multi-use site and area lights, available in multiple lumen packages with precision optics and flexible mounting options for outdoor applications.



FLJ : UTILITY FLOOD LIGHT

The FLJ family of LED fixtures features an attractive look and a wide range of lumen packages to suit a variety of flood lighting applications.



SIGNAL : FLOOD LIGHT & HIGHBAY

SIGNAL is the brightest flood light/highbay fixture on the market with an output of up to 96,000 lumens. Its lightweight design allows for easy installation and unparalleled energy savings.



WALLPACKS : WALL MOUNT LIGHTS

WALLPACK lights are economical and energy-efficient LED solutions for general purpose wall mount lighting, consuming a fraction of the energy of comparable traditional fixtures.



SCRG : SURFACE CANOPY ROUND GARAGE

SCRG fixtures are multipurpose solutions for garage and canopy lighting, providing unmatched versatility with multiple mounting options and durable construction.



VTS : VAPOR TIGHT SURFACE

VTS fixtures are high-efficiency solutions for utility lighting applications, featuring 0-10V dimming control, surface mount hardware, and multiple knockouts for conduit and pendant mounting.



ORDERING INFORMATION

VERT : SITE LIGHTING PLATFORM

EXAMPLE: VRT2-240/C5/740-U-D-T3-BZ

VRT1 - ≤150W	125 - 100W; 13,000 lm 130 - 100W; 13,000 lm 195 - 150W; 19,500 lm	C5 - 125lpw	740 - 70 CRI; 4000K 750 - 70 CRI; 5000K	U - 100-277V V - 200-480V	D - 0-10V Dimming	T3 - Type 3 T5 - Type 5	BZ - Bronze	MOUNT: VRT-S-BZ - Slipfitter VRT-Y-BZ - Yoke VRT-D-BZ - Direct
VRT2 - ≥185W	240 - 185W; 24,000 lm 250 - 185W; 25,000 lm 380 - 300W; 38,000 lm							
VRT3 - 450W	563 - 450W; 56,250 lm							

FLJ : UTILITY FLOOD LIGHT

EXAMPLE: FLJ-108/D5/740-U-D-S-BZ

FLJ : LED Utility Flood Light	1C - 12W; 1,270/1,423 lm 3C - 30W; 3,135/3,538 lm 5C - 50W; 5,411/6,103 lm 108 - 80W; 10,800 lm 130 - 100W; 13,000 lm 165 - 150W; 16,500 lm	30K - 3000K 50K - 5000K	Y - Yoke K - Knuckle S - Slipfitter	U - 100-277V V - 277-480V
--------------------------------------	--	--	--	--

SIGNAL : FLOOD LIGHT & HIGHBAY

EXAMPLE: SIG-720/G0/750-V-D-G-BK

SIG - SIGNAL	720 - 450W; 72,000 lm 960 - 600W; 96,000 lm	G0 - 160 lpw	740 - 70 CRI; 4000K 750 - 70 CRI; 5000K	U - 120-277V V - 277-480V	D - 0-10V Dimming	G - Glass	BK - Black
---------------------	--	---------------------	--	--	--------------------------	------------------	-------------------

WMG : WALLPACK GLASS

EXAMPLE: WMG-3C-50K-U

WMG : Wallpack Glass	1C - 30W; 3,200 lm 2C - 40W; 4,600 lm / 50W; 5,800 lm 3C - 60W; 7,000 lm 4C - 80W; 9,800 lm 5C - 120W; 13,000 lm	40K - 4000K 50K - 5000K	U - 120-277V V - 277-480V
-----------------------------	---	--	--

WMC : WALLPACK CUBE

EXAMPLE: WMC-3C-50K-U

WMC : Wallpack Cube	2C - 20W; 1,900 lm 3C - 30W; 2,800 lm	40K - 4000K 50K - 5000K	U - 120-277V
----------------------------	--	--	---------------------

WPT : WALLPACK TRAPEZOID

EXAMPLE: WPT1-88/850-BZ-V

WPT1 : Wallpack Trapezoid	55 - 50W; 5,500 lm 88 - 80W; 8,800 lm	840 - 80 CRI; 4000K 850 - 80 CRI; 5000K	BZ - Bronze	U - 120-277V V - 347-480V
----------------------------------	--	--	--------------------	--

WPW : WALLPACK WEDGE

EXAMPLE: WPW-1C-120

WPW : Wallpack Wedge	1C - 11W; 828 lm	120 - 120-277V
-----------------------------	-------------------------	-----------------------

DTD : DUSK-TO-DAWN

EXAMPLE: DTD-140/B5/850-DIM-GY-U

DTD : Dusk to Dawn	60 - 50W; 6,000 lm 95 - 79W; 9,500 lm 140 - 122W; 14,000 lm	B5 - 115 lpw C0 - 120 lpw	5000K	(Blank) - No dimming DIM - 0-10V Dimming	GY - Grey	U - 120-277V
---------------------------	--	--	-------	--	------------------	---------------------

SCRG : SURFACE CANOPY ROUND GARAGE

EXAMPLE: SCRG-50/D0/840-DIM-U-S1B-W

SCRG : Surface Canopy Round	50 - 40W; 5,000 lm 75 - 60W; 8,000 lm	D0 - 130	840 - 80CRI; 4000K 850 - 80CRI; 5000K	DIM - Dimmable	U - Universal	(Blank) - No sensor S1B - Sensor	W - White
------------------------------------	--	-----------------	--	-----------------------	----------------------	--	------------------

VTS : VAPOR TIGHT SURFACE

EXAMPLE: VTS-4-75/B5/850-DIM-U

VTS : LED Vapor Tight Surface	4CS - 40W; 4,400 lm 5CP - 40W; 5,200 lm 7CP - 52W; 6,760 lm 7CS - 65W; 7,150 lm	45 - 40W; 4,500 lm 52 - 40W; 5,200 lm 68 - 52W; 6,800 lm 75 - 65W; 7,500 lm	B0 - 110 lpw B5 - 115 lpw D0 - 130 lpw	40K - 4000K 850 - 5000K	U - 100-277V
--------------------------------------	--	--	---	--	---------------------



solutions. service. simplicity. eiko.com

Rev. 3/19/19