READY TO SERVE
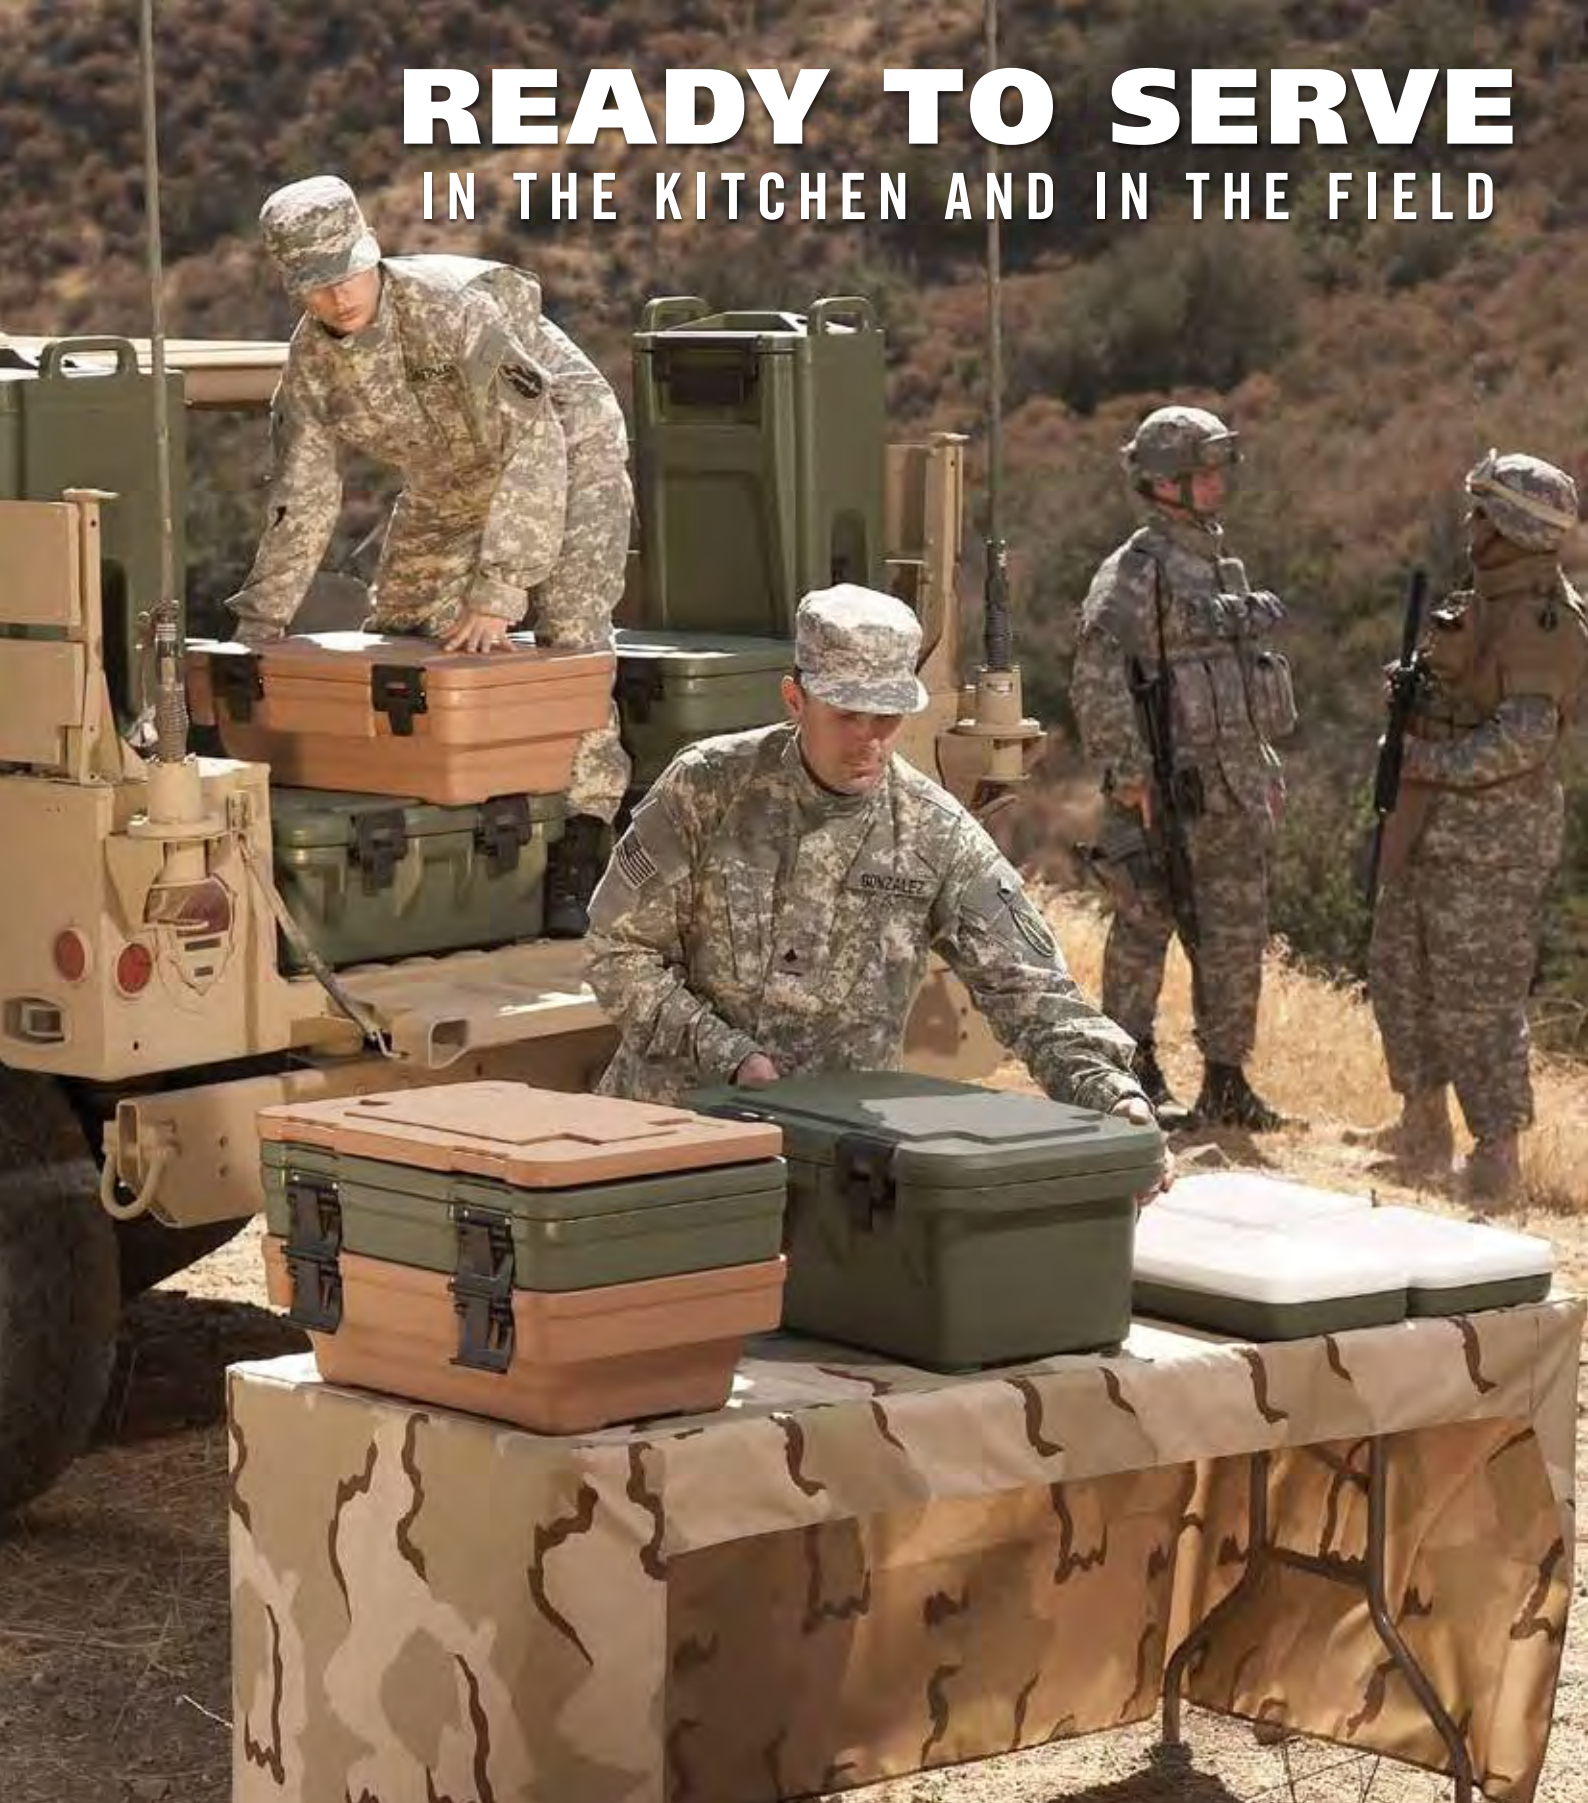
IN THE KITCHEN AND IN THE FIELD

**Ensuring Food Safety
From the Kitchen
to the Field**

Trusted Durability

Cambro® insulated food and beverage equipment is the backbone of field catering, satellite feeding and cafeteria operations around the world. This is due to the unmatched durability and design that withstands challenging climatic conditions and geographic environments. Because of this performance, Cambro has been the primary supplier of defense catering equipment to military units and humanitarian agencies around the world for decades.

ULTRA CAMTAINERS® INSULATED BEVERAGE CARRIERS

Ideal for holding hot coffee, tea or cold water. One piece, seamless double wall construction and thick foam insulation ensures beverage temperatures will be maintained for hours. Wide nylon latch is easy to open and close. Recessed large faucet and wide opening accommodates larger cups. Molded-in handles make unit easy to carry. Stack interlocking ensures stable stacking and helps hold units in place during transport. This Carrier can also be used for beverage service in the kitchen.

Dark Brown (131)

Coffee Beige (157)

Military Green (403)

NATO Green (436)

UC1000

UC500

UC1000

UC500

CODE	APPROXIMATE CAPACITY	7 OZ./ 207 ML CUPS	EXTERIOR DIMENSIONS D X W X H	CASE LBS. (CUBE)/ CASE KG (CUBE M³)
UC500	5¼ gal. 19,9 L	96 94	16¾" x 11¾" x 26⅝" 42,5 x 30 x 68 cm	18.86 (3.25) 9,5 (0,09)
UC1000*	10½ gal. 39,8 L	192 192	20½" x 16 ¼" x 25¾" 52 x 41,5 x 65,5 cm	29.19 (5.24) 13,8 (0,12)

*Not available in Nato Green (436).

Hot	190°F	186°F	184°F	181°F	179°F
	88°C	85,5°C	84°C	82°C	80°C
	Starting Temperature	1 hr.	2 hrs.	3 hrs.	4 hrs.

Cold	33.9°F	34.1°F	34.7°F	35.2°F	35.8°F
	0,5°C	1°C	1°C	1,5°C	2°C
	Starting Temperature	1 hr.	2 hrs.	3 hrs.	4 hrs.

UC1000 PACKAGE

QTY	CODE	DESCRIPTION
1	UC1000	10½ Gallon (39,7 L) Ultra Camtainer
1	R1000LCD*	Riser for Ultra Camtainer
1	LCDCH10*	Condiment Holder

*Not available in Nato Green (436).

UC500 PACKAGE

QTY	CODE	DESCRIPTION
1	UC500	5¼ Gallon (19,9 L) Ultra Camtainer
1	R500LCD**	Riser for Ultra Camtainer
1	LCDCH**	Condiment Holder

**Also fits UC250. Not available in Nato Green (436).

ICE CADDY

Cambro® Ice Caddies hold large quantities of ice for days. The lid slides back for quick and easy access and slides shut for safe and sanitary ice storage. Recessed well and drain shelf keep ice out of water, extending holding times. Molded-in handles ease transporting and allow for balanced lifting on or off trucks.

CODE	ICS200TB*
EXTERIOR DIMENSIONS	23" x 34" x 39½"
L x D x H	58,5 x 86,4 x 100,4 cm
HOLDING CAPACITY	200 lbs. (91 KG)
CASE LBS. (CUBE)/ CASE KG (CUBE M³)	98 (19) 44,5 (0,54)

*Not available in Nato Green (436).

HANDWASHING STATION

StoreSafe

Set up a handwashing station in the field with an Ultra Camtainer® and a Handwash Accessory. Fill the beverage server with hot water and place the handwash accessory on top of the server and secure with the Velcro strap.

HWAPR

HWATD

Dark Brown (131)

Coffee Beige (157)

Military Green (403)

NATO Green (436)

HANDWASH ACCESSORY

CODE	DESCRIPTION	EXTERNAL DIMENSIONS H x D x W	CASE LBS. (CUBE)/ CASE KG (CUBE M³)
Handwash Accessory			
HWAPR	With Paper Towel Roll Holder	14⅝" x 21⅜" x 10⅛" 37,2 cm	9.75 (2.06) 4,41 (0,058)
HWATD	With Multi-Fold Paper Towel Dispenser	14⅝" x 21⅜" x 10⅛" 37,2 x 54,3 x 25,7 cm	10.3 (2.06) 5,0 (0,058)
Pail with Bail			
PWB22	22 Qt. (20,8 L)	Top Dia. 14⅞ (37,8 cm) Height 15" (38,1 CM)	14.43 (3.2) 6,5 (0,09)

*Can also be used to set up a handwashing station in the Kitchen.

Extended Front Side Walls Protect Soap Dispenser.

Molded-in Velcro Cinchstraps Easily Secure to Camtainer Handles.

Also Included:

- 1 Easy Serve Dispenser that attaches to Faucet Handle for Hands-Free Water Dispensing.
- 1 Sheet with 4 'Handwash Only' Labels.

CAMKIOSK® HAND SINK CART

The Hand Sink Cart has a two compartment stainless steel sink and runs cold and hot water up to 140°F (60°C). Two 5 gallon (19 L) fresh water tanks and two 7½ gallon (28,4 L) refuse tanks provide approximately 70 hand washings. The tanks are easy to insert or remove for emptying and refilling. The hot water heater has a 2½ gallon (9,5 L) capacity and heats water in 10 minutes. Paper towel holder and soap dispenser are included. Cart can be plugged into a truck using an inverter unit.

CODE	VOLTAGE	DIMENSIONS L x W x H	CASE KG (CUBE M³)
KSC402	110	40⁹⁄₁₆" x 33" x 45½" 103 x 83,8 x 115,6 cm	209.97 (39.41) 95,24 (1,116)

Case Pack: 1.

Water heater and water pump draw a maximum of 11.25 amps and 0.7 amps, respectively. Hand Sink Cart electrical system runs on an average 10 amps.

StoreSafe

NSF. Water pump only.

ETL Hand Sink Water Pump, UL & CE approved.

Hand Sink Cart is designed for hand washing. It contains no filter for purifying water for drinking.

CamKiosk Hand Sink Cart Colors

Kentucky Green (519)

Granite Green (192)

Black Base with Granite Gray Door (426)

INSULATED FOOD PAN CARRIERS

UPCS160 & UPCS180

Transport meals in full or fractional size food pans to any destination. These easy to clean units feature a built-in seal so no gasket is required. Made by structural web injection molding with thick foam insulation for exceptional durability and temperature retention, these carriers have molded in handles on all four sides for easy carrying. Interstack or stack with Cambro® Ultra Pan Camcarriers® and Multiple Pan Camcarriers. UPCS Pan Camcarriers have passed military compliance tests including rigorous drop tests.


UPCS180

CODE	EXTERIOR DIMENSIONS D x W x H	APPROX CAPACITY	CASE LBS. (CUBE) CASE KG (CUBE M³)	HOLDS GN$^1/_1$ PANS OR FRACTIONAL SIZES DEPTH
S-Series Ultra Pan Carriers				
UPCS160	17⅛" x 25⅛" x 10¼"	20 qts.	19 (2.58)	6" deep
	43,5 x 63,8 x 26 cm	18,9 L	8,6 (0,07)	15,2 cm deep
UPCS180	17⅛" x 25⅛" x 12"	24½ qts.	20 (3.23)	8" deep
	43,5 x 63,8 x 30,5 cm	23,2 L	9,1 (0,09)	20,3 cm deep

Case Pack: 1

Dark Brown (131) Coffee Beige (157) Military Green (403)

StoreSafe NSF

Hot	189°F 87,2°C	185°F 85°C	181°F 82,7°C	178°F 81,1°C	175°F 79,4°C
	Starting Temperature	1 hr.	2 hrs.	3 hrs.	4 hrs.

Actual tests on a UPCS160 show an average temperature drop of only 4°F (1,25°C) per hour.

Cold	33°F 0,6°C	34°F 1,1°C	35°F 1,7°C	35.5°F 1,9°C	36.5°F 2,5°C
	Starting Temperature	1 hr.	2 hrs.	3 hrs.	4 hrs.

Actual tests on a UPCS160 show an average temperature gain of only 1°F (0,5°C) per hour.

UPCSS160

Lighten your load and reduce storage requirements with the Ultra Pan Carrier S-Series Stack-and-Store. The UPCSS160 is a single pan carrier that weighs 20% less than comparable top loading carriers and features insulated lids and cantilevered bases that nest together. **This key feature reduces stacking and storage height by up to 35%.** The smooth areas on lid and carrier make labeling straightforward.
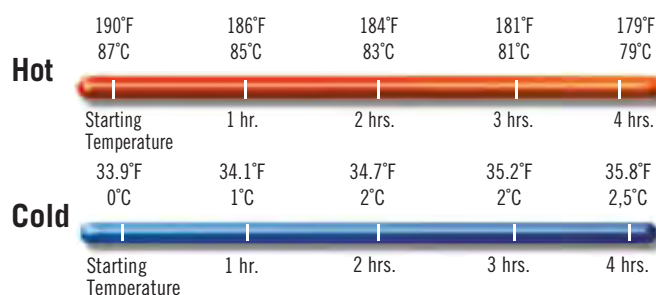

UPCSS160

CODE	EXTERIOR DIMENSIONS D x W x H	APPROX CAPACITY	CASE LBS. (CUBE) CASE KG (CUBE M³)	HOLDS GN⅓ PANS OR FRACTIONAL SIZES DEPTH
S-Series Ultra Pan Carriers				
UPCSS160	24½" x 16½" x 9⅛"	20 qts.	16.77 (2,6)	6" or 4" deep
	62,2 x 41,9 x 23,2 cm	18,9 L	7,61 (0,07)	15,2 or 10,2 cm deep

Case Pack: 1

Dark Brown (131) Coffee Beige (157) Military Green (403)

StoreSafe NSF

Hot	190°F 87°C	186°F 85°C	184°F 83°C	181°F 81°C	179°F 79°C
	Starting Temperature	1 hr.	2 hrs.	3 hrs.	4 hrs.

Cold	33.9°F 0°C	34.1°F 1°C	34.7°F 2°C	35.2°F 2°C	35.8°F 2,5°C
	Starting Temperature	1 hr.	2 hrs.	3 hrs.	4 hrs.

INSULATED FOOD PAN CARRIER PACKAGES

Actual amber color may vary.

UPCS180PKGE

QTY	CODE	DESCRIPTION
1	UPCS180	Pan Carrier Holds 8" (20,3 cm) Deep Pan-Full Size or Fractional
3	36HP	GN 1/3 Heat Resistant Food Pan 6" (15,2 cm) Deep
3	30HPLN	FlipLid® Cover w/ Notch for GN 1/3 Heat Resistant Food Pan
3	30PPCWSC	Seal Cover for GN 1/3 Food Pan*
1	12TGS	Camwear® Scallop Grip 12" (30,5 cm) Tong
1	SPOP13	Heat Resistant 13" (33 cm) Perforated Spoon
1	SPO13	Heat Resistant 13" (33 cm) Solid Spoon
3	DIV12	Divider Bar

Colors: Dark Brown (131), Coffee Beige (157), Military Green (403), NATO Green (436).
*Not pictured.

UPCS180PKGF

QTY	CODE	DESCRIPTION
1	UPCS180	Pan Carrier Holds 8" (20,3 cm) Deep Pan-Full Size or Fractional
1	16HP	GN 1/1 Heat Resistant Food Pan 6" (15,2 cm) Deep
1	10CWGL	GripLid® for GN 1/1 Food Pan
1	12TGS	Camwear Scallop Grip Tong
1	SPOP13	Heat Resistant 13" (33 cm) Perforated Spoon
1	SPO13	Heat Resistant 13" (33 cm) Solid Spoon

Colors: Dark Brown (131), Coffee Beige (157), Military Green (403).

Actual amber color may vary.

UPCS180PKGG

QTY	CODE	DESCRIPTION
1	UPCS180	Pan Carrier Holds 8" (20,3 cm) Deep Pan-Full Size or Fractional
1	26HP	GN 1/2 Heat Resistant Food Pan 6" (15,2 cm) Deep
1	20HPLN	FlipLid Cover w/ Notch for GN 1/2 Heat Resistant Food Pan
1	20PPCWSC	Seal Cover for GN 1/2 Food Pan*
2	46HP	GN 1/4 Heat Resistant Food Pan 6" (15,2 cm) Deep
2	40HPCHN	Notched Cover with Handle for GN 1/4 Size Food Pan*
2	40PPCWSC	Seal Cover for GN 1/4 Size Food Pan*
1	12TGS	Camwear Scallop Grip Tong
1	SPOP13	Heat Resistant 13" (33 cm) Perforated Spoon
1	SPO13	Heat Resistant 13" (33 cm) Solid Spoon
3	DIV12	Divider Bar

Colors: Dark Brown (131), Coffee Beige (157), Military Green (403).
*Not pictured.

UPCS180PKGH

QTY	CODE	DESCRIPTION
1	UPCS180	Pan Carrier Holds 8" (20,3 cm) Deep Pan-Full Size or Fractional
1	36HP	GN 1/3 Heat Resistant Food Pan 6" (15,2 cm) Deep
1	30HPLN	Notched FlipLid for GN 1/3 Heat Resistant Food Pan
1	30PPCWSC	Seal Cover for GN 1/3 Food Pan*
2	66HP	GN 1/6 Heat Resistant Food Pan 6" (15,2 cm) Deep
2	60HPLN	Notched FlipLid for GN 1/6 Heat Resistant Food Pan
2	60PPCWSC	Seal Cover for GN 1/6 Size Food Pan*
3	94HP	GN 1/9 Heat Resistant Food Pan 4" (10,2 cm) Deep
3	90PPCWSC	Seal Cover for GN 1/9 Food Pan
1	12TGS	Camwear Scallop Grip 12" (30,5 cm) Tong
1	SPOP13	Heat Resistant 13" (33 cm) Perforated Spoon
1	SPO13	Heat Resistant 13" (33 cm) Solid Spoon
3	DIV12	Divider Bar

Colors: Dark Brown (131), Coffee Beige (157), Military Green (403).
*Not pictured.

UPC400

Made for high capacity and extreme durability, this front loading pan carrier holds full, half and third size GN food pans. Thick foam insulation allows for safe food temperatures to be maintained for hours so that hot food stays hot and cold food stays cold. Handles are molded into the carrier for easy lifting and carrying.

HOLDING CAPACITY

Full Pans

2½" (6,5 cm) deep	6 pans
4" (10 cm) deep	4 pans
6" (15 cm) deep	3 pans
8" (20 cm) deep	2 pans

Gastronorm Camtray®

3253	12 trays
2632	24 trays

CODE	EXTERIOR DIMENSIONS D x W x H	INTERIOR DIMENSIONS D x W x H	CASE LBS. (CUBE)/ CASE KG (CUBE M³)
UPC400	25" x 18" x 24⅞" 63,5 x 45,7 x 63,2 cm	21" x 13⅛" x 19⅛" 53,3 x 33,5 x 48,6 cm	35 (7.19) 16 (0,20)

Hot

	190°F 87,8°C	186°F 85,6°C	184°F 84,5°C	181°F 82,8°C	179°F 81,7°C
	Starting Temp.	1 hr.	2 hrs.	3 hrs.	4 hrs.

Cold

	33.9°F 0,3°C	34.1°F 0,8°C	34.7°F 0,9°C	35.2°F 1,2°C	35.88°F 1,4°C
	Starting Temp.	1 hr.	2 hrs.	3 hrs.	4 hrs.

Dark Brown (131) Coffee Beige (157) Military Green (403) NATO Green (436)

StoreSafe NSF

# TEMPERATURE MAINTENANCE TOOLS

Camchiller®

Extend cold holding time or enhance safe holding below 41°F (5°C) when frequent access is required. To use the Camchiller freeze it for eight hours and place it into a Cambro® food pan carrier before loading. To optimize use, place at top of compartment and move Camchiller down as pans are removed.

NSF

CODE	CP1220 (GN FULL SIZE)	CP1210 (GN HALF SIZE)
FITS INTO	Insulated Transporters: UPC400, UPCSS160	Insulated Transporters: UPC400, UPCS160, UPCS180
QUANTITY PER CAVITY	1	1 or 2
DIMENSIONS L x W x H	20¹³⁄₁₆" x 12⅞" x 1½" 53 x 33 x 3,8 cm	10⅜" x 12¾" x 1½" 26,4 x 32,4 x 3,8 cm
CASE LBS. (CUBE)/ CASE KG (CUBE M³)	11 (0.38) 5 (0,01)	3.9 (0.17) 1,8 (0,01)

Case Pack: 1   **Color:** Cold Blue (159).

Cold — temperature gain averaging 1.5°F/hour.

33.6°F	34.4°F	35.4°F	36.2°F	37°F
Starting Temp.	1 hr.	2 hrs.	3 hrs.	4 hrs.

ThermoBarrier®

This temperature maintenance tool is used to separate hot food on top and cold food on the bottom. It can also be used to minimize empty space and reduce food temperature loss within a partially loaded compartment.

NSF

CODE	400DIV
FITS INTO	UPC400
QUANTITY PER COMPARTMENT	1
DIMENSIONS L x W x H	21¼" x 13" x 1½" 54 x 33,1 x 3,8 cm
CASE LBS. (CUBE)/ CASE KG (CUBE M³)	3,6 (0.38) 1,7 (0,01)

**Case Pack:** 1   **Color:** Gray (180).

Camwarmer®

The Camwarmer offers added insurance to keep hot foods hot during holding and transporting. It also extends holding time or enhances safe holding above 140°F (65°C) when frequent access is required.

NSF

CODE	1210PW
FITS INTO	UPC400
DIMENSIONS L x W x H	13¼" x 10⅞" x 1⁹⁄₁₆" 33,7 x 27,6 x 4 cm
CASE LBS. (CUBE)/ CASE KG (CUBE M³)	3,6 (0.38) 1,7 (0,01)

**Case Pack:** 1   **Color:** Granite Gray (191).

UPC400 shown with Camwarmers.
Note: Place Camwarmers on bottom rail, do not place on bottom surface to avoid damage to the unit.

# H-PAN™ HIGH HEAT FOOD PANS AND LIDS

Ideal for hot food in the field, these high heat material food pans are designed to Gastronorm GN specifications. These pans can withstand temperatures from -40°F to 300°F (-40°C to 149°C) and are safe for microwaves and ovens. A large selection of high heat lids are also available to fit these pans.

# CAMWEAR® POLYCARBONATE FOOD PANS AND LIDS

Store, transport and serve food all in one pan. Cambro® offers a complete line of Gastronorm GN food pans and lids made out of virtually unbreakable Camwear polycarbonate material. A large selection of Camwear lids are also available to fit these pans.

StoreSafe NSF®

Food Pans

CONFIGURATIONS	APPROXIMATE CAPACITY QT (L)	PAN DEPTH	H-PAN CODE	CAMWEAR CODE
GN $\frac{1}{1}$ $12\frac{3}{4}$" x $20\frac{7}{8}$" (32,5 x 53 cm)	8.9 (8,5 L)	$2\frac{1}{2}$" (6,5 cm)	12HP	12CW
	13.7 (13,0 L)	4" (10 cm)	14HP	14CW
	20.6 (19,5 L)	6" (15 cm)	16HP	16CW
	—	Drain Shelf	10HPD	10CWD
		3" Colander	13CLRHP	13CLRCW
		5" Colander	15CLRHP	15CLRCW
GN $\frac{1}{2}$ Long $6\frac{3}{8}$" x $20\frac{7}{8}$" (16,2 x 53 cm)	3.2 (3 L)	$2\frac{1}{2}$" (6,5 cm)	22LPHP	22LPCW
	5.3 4 (5 L)	4" (10 cm)	24LPHP	24LPCW
		Drain Shelf	20LPHPD	20LPCWD
GN $\frac{1}{2}$ $10\frac{7}{16}$" x $12\frac{3}{4}$" (26,5 x 32,5 cm)	4.1 (3,9 L)	$2\frac{1}{2}$" (6,5 cm)	22HP	22CW
	6.3 (5,9 L)	4" (10 cm)	24HP	24CW
	9.4 (8,9 L)	6" (15 cm)	26HP	26CW
	—	Drain Shelf	20HPD	20CWD
	—	3" Colander	23CLRHP	23CLRCW
	—	5" Colander	25CLRHP	25CLRCW
GN $\frac{1}{3}$ $6\frac{15}{16}$" x $12\frac{3}{4}$" (17,6 x 32,5 cm)	2.5 (2,4 L)	$2\frac{1}{2}$" (6,5 cm)	32HP	32CW
	3.8 (3,6 L)	4" (10 cm)	34HP	34CW
	5.6 (5,3 L)	6" (15 cm)	36HP	36CW
	—	Drain Shelf	30HPD	30CWD
	—	3" Colander	33CLRHP	33CLRCW
	—	5" Colander	35CLRHP	35CLRCW
GN $\frac{1}{4}$ $6\frac{3}{8}$" x $10\frac{7}{16}$" (16,2 x 26,5 cm)	1.8 (1,7 L)	$2\frac{1}{2}$" (6,5 cm)	42HP	42CW
	2.7 (2,5 L)	4" (10 cm)	44HP	44CW
	3.9 (3,7 L)	6" (15 cm)	46HP	46CW
	—	Drain Shelf	40HPD	40CWD
GN $\frac{1}{6}$ $6\frac{3}{8}$" x $6\frac{15}{16}$" (16,2 x 17,6 cm)	1.1 (1 L)	$2\frac{1}{2}$" (6,5 cm)	62HP	62CW
	1.6 (1,5 L)	4" (10 cm)	64HP	64CW
	2.4 (2,2 L)	6" (15 cm)	66HP	66CW
	—	Drain Shelf	60HPD	60CWD
	—	3" Colander	63CLRHP	63CLRCW
	—	5" Colander	65CLRHP	65CLRCW
GN $\frac{1}{9}$ $4\frac{1}{4}$" x $6\frac{15}{16}$" (10,8 x 17,6 cm)	0.6 (0,57 L)	$2\frac{1}{2}$" (6,5 cm)	92HP	92CW
	0.9 (0,85 L)	4" (10 cm)	94HP	94CW
		Drain Shelf	90HPD	90CWD

Case Pack: 6. **Camwear Color:** Clear (135). **H-Pan Color:** Amber (150).

FITS PAN	DESCRIPTION	H-PAN LID CODE	CAMWEAR LID CODE
GN $\frac{1}{1}$ $12\frac{3}{4}$" x $20\frac{7}{8}$" (32,5 x 53 cm)	Flat Cover	10HPC	10CWC
	Cover with Handle	10HPCH	10CWCH
	Notched Cover w/Handle	10HPCHN	10CWCHN
	GripLid®	10CWGL	10CWGL
	Seal Cover	N/A	10PPCWSC
GN $\frac{1}{2}$ Long $6\frac{3}{8}$" x $20\frac{7}{8}$" (16,2 x 53 cm)	Flat Cover	20LPHPC	20LPCWC
GN $\frac{1}{2}$ $10\frac{7}{16}$" x $12\frac{3}{4}$" (26,5 x 32,5 cm)	Flat Cover	20HPC	20CWC
	Cover with Handle	20HPCH	20CWCH
	Notched Cover w/Handle	20HPCHN	20CWCHN
	FlipLid®	20HPL	20CWL
	Notched FlipLid	20HPLN	20CWLN
	GripLid	20CWGL	20CWGL
	Seal Cover	N/A	20PPCWSC
GN $\frac{1}{3}$ $6\frac{15}{16}$" x $12\frac{3}{4}$" (17,6 x 32,5 cm)	Flat Cover	30HPC	30CWC
	Cover with Handle	30HPCH	30CWCH
	Notched Cover w/Handle	30HPCHN	30CWCHN
	FlipLid	30HPL	30CWL
	Notched FlipLid	30HPLN	30CWLN
	GripLid	30CWGL	30CWGL
	Seal Cover	N/A	30PPCWSC
GN $\frac{1}{4}$ $6\frac{3}{8}$" x $10\frac{7}{16}$" (16,2 x 26,5 cm)	Flat Cover	40HPC	40CWC
	Cover with Handle	40HPCH	40CWHC
	Notched Cover w/Handle	40HPCHN	40CWCHN
	Seal Cover	N/A	40PPCWSC
GN $\frac{1}{6}$ $6\frac{3}{8}$" x $6\frac{15}{16}$" (16,2 x 17,6 cm)	Flat Cover	60HPC	60CWC
	Cover with Handle	60HPCH	60CWCH
	Notched Cover w/Handle	60HPCHN	60CWCHN
	FlipLid	60HPL	60CWL
	Notched FlipLid	60HPLN	60CWLN
	GripLid	60CWGL	60CWGL
	Seal Cover	N/A	60PPCWSC
GN $\frac{1}{9}$ $4\frac{1}{4}$" x $6\frac{15}{16}$" (10,8 x 17,6 cm)	Flat Cover	90HPC	90CWC
	Flat Notched Cover	N/A	90CWCN
	Seal Cover	N/A	90PPCWSC

Case Pack for all Lids: 6
N/A: Not Available. **Camwear Color:** Clear (135).
H-Pan Color: Amber (150).

ULTRA PAN CARRIER® AND ULTRA CAMCART® H-SERIES

Perfect for frequent opening and closing, the H-Series Carriers extend hot food holding time and ensure food safety. This carrier can hold a wide variety of hot foods. Using less energy than three standard 100 watt light bulbs, the H-Series Carriers also have a three minute recovery time. UPCH400 models stack for storage or transporting on a Camdolly® with securing strap.

UPCH Colors

Granite Gray (191)
Black (110)
Dark Brown (131)

MODEL	UPCH400 / UPCH800 (110VAC MODELS)	UPCH4002 / UPCH8002 (220VAC MODELS)
Electrical Specifications		
Required Voltage	110 - 120 VAC	200 - 230 VAC
Maximum Amp.	2.0a	1.2a
Watts	230w	265w
Hertz	50/60	50/60
Plug Type	Nema 5-15P	Euro plug, CEE7
Cord Connector / Inlet	C15 / C16	C15 / C16
Power Cord Length	9 feet	2.7 m

CODE	DESCRIPTION	EXTERIOR DIMENSIONS W x D x H	COMPARTMENT DIMENSIONS W x D x H	CASE LBS. (CUBE) CASE KG (CUBE M³)
1-Compartment Hot Holding Ultra Pan Carriers				
UPCH400	Heated Ultra Pan Carrier, 110V	18⅛" x 26⅜" x 24⁷⁄₉"	13⅛" x 21" x 19⅛"	45 (7.96)
UPCH4002	Heated Ultra Pan Carrier, 220V	46 x 67 x 63 cm	33,5 x 53,3 x 48,6 cm	20,4 (0,225)
UPCHW400	Heated Ultra Pan Carrier w/Casters, 110V	18⅛" x 26⅜" x 31¼"	13⅛" x 21" x 19⅛"	54 (9.98)
UPCHW4002	Heated Ultra Pan Carrier w/Casters, 220V	46 x 67 x 79,4 cm	33,5 x 53,3 x 48,6 cm	24,5 (0,283)
UPCHD400*	Heated UPCH400 Replacement/UPC400 Retrofit Door, 110V	18⅛" x 3½" x 21"	–	13 (0.93)
UPCHD4002*	Heated UPCH400 Replacement/UPC400 Retrofit Door, 220V	46 x 9 x 53,3 cm	–	5,9 (0,026)
CD400	Camdolly®	21⁷⁄₁₆" x 28⅛" x 9"	–	19.6 (3.35)
		53,5 x 71,4 x 23 cm	–	7,3 (0,095)
400STP	Strap	150" long	–	0.35 (0.02)
		3,8 m long	–	0,16 (0,01)
2-Compartment Hot Holding Ultra Camcarts				
UPCH800	Heated Ultra Camcart, 110V	20½" x 27⅛" x 54"	13" x 21½" x 19⅛"	102 (19.89)
UPCH8002	Heated Ultra Camcart, 220V	52 x 69 x 137,2 cm	33 x 54,5 x 48,5 cm	46,3 (0,563)
UPCHT800	Ultra Camcart with Heated Top Door Only, 110V	20½" x 27⅛" x 54"	13" x 21½" x 19⅛"	96 (19.89)
UPCHT8002	Ultra Camcart with Heated Top Door Only, 220V	52 x 69 x 137,2 cm	33 x 54,5 x 48,5 cm	43,6 (0,563)
UPCHTD800*	Heated UPCH800 Replacement/UPC800 Retrofit Top Door, 110V	18⅛" x 3½" x 21"	–	14.15 (0.93)
UPCHTD8002*	Heated UPCH800 Replacement/UPC800 Retrofit Top Door, 220V	46 x 9 x 53,3 cm	–	6,4 (0,026)
UPCHBD800*	Heated UPCH800 Replacement/UPC800 Retrofit Bottom Door, 110V	18⅛" x 3½" x 21"	–	13.9 (0.93)
UPCHBD8002*	Heated UPCH800 Replacement/UPC800 Retrofit Bottom Door, 220V	46 x 9 x 53,3 cm	–	6,3 (0,026)

Case Pack: 1.

* Note: UPCH400, UPCH800 top and UPCH800 bottom replacement/retrofit doors are not interchangeable.

COMBO CART® PLUS

Combo Cart Plus can hold sheet pans, GN food pans, trays and even pizza boxes! Tough polyethylene exterior will not rust or dent and remains cool to the touch during operation. Thick polyurethane insulation keeps cold and hot food at safe temperatures 4+ hours, even when unplugged. The door heaters in electric models, consistently circulate gentle, non-radiant heat that will not dry out food.

Looking to go green? Energy-efficient door heaters make the tall cart over 50% more energy efficient than leading metal carts: low carts over 180%!

Electrical Specifications (Per Compartment)

	110V MODELS	220V MODELS
REQUIRED VOLTAGE	100-125 VAC	200-230 VAC
MAXIMUM AMP	4.6a	2.3a
WATTS	529w	506w
HERTZ	50/60	50/60
PHASE	Single	Single
PLUG TYPES	5-15 to C15RA	CEE7/7 to C15RA
ALTERNATE PLUG TYPES FOR INTERNATIONAL	JIS8303 to C15RA (Japan)	BS1363 to C15RA (UK / Ireland+more)
POWER CORD LENGTH	9 ft.	2,7 m

CODE	DESCRIPTION	UNIT WEIGHT LBS (KG)	CASE LBS. (CUBE) CASE KG (CUBE M³)
Non-Electric Low			
CMBPL	Standard Casters	115.8 (52,6)	132 (26.1) 60 (0,7)
Non-Electric Tall			
CMBP	Standard Casters	210 (95,3)	230.5 (42.5) 104,6 (1,2)
Electric Low			
CMBPLH / CMBPLH2	110V, Standard Casters / 220V, Standard Casters	128.3 (58,3)	144.5 (26.1) 65,7 (0,7)
Electric Tall			
CMBPH / CMBPH2	110V, Standard Casters / 220V, Standard Casters	232 (105,2)	252.5 (42.5) 114,5 (1,2)
CMBPTH / CMBPTH2	Top Door Heated only, Standard Casters / 220V, Top Door Heated only, Standard Casters	230.5 (104,6)	251 (42.5) 113,9 (1,2)

Case Pack: 1   **Color:** Charcoal Gray (615).
Includes: 7 pairs of stainless Universal Rails per compartment and Standard Casters 6" x 1 3/4 (15,2 x 4,5 cm).
Options Available: Heavy Duty Casters 6 x 2" (15,2 x 5,1 cm) and Security Packages.

Exterior Dimensions (Low) W x D x H: 27⅝" x 33½" x 41⅛" (70,2 x 85,1 x 104,5 cm)

Exterior Dimensions (Tall) W x D x H: 27⅝" x 33½" x 65⅞" (70,2 x 85,1 x 167,3 cm)

Internal Compartment Dimensions W x D x H: 21⅛" x 26¼" x 25½" (53,7 x 66,7 x 64,8 cm)

CAMTHERM® FOOD HOLDING CABINETS

Camtherm Cabinets keep cold food cold and hot food hot. Louvered panels extend the length of the unit to evenly circulate air for consistent safe holding temperatures. When unplugged, the foam insulated cabinet can maintain food temperatures for 4+hours.

- Available in hot only and hot/cold, single cavity units.
- Polyurethane insulation keeps food at the right temperature during transport when the unit is unplugged.
- Self-venting cap releases steam and equalizes pressure, maintaining food quality.
- Built-in external thermometer.
- Doors swing open flush to the sides for easy loading and unloading.
- Wide nylon latches are durable and easy to open and close.
- Door menu clips hold routing instructions, content list, and dietary info or event details.

ELECTRICAL SPECIFICATIONS

	LOW PROFILE HOT ONLY	LOW PROFILE HOT/COLD	HIGH PROFILE HOT ONLY	HIGH PROFILE HOT/COLD
VOLTS	110V	110V	110V	110V
PLUG TYPE	Nema 5-15P	Nema 5-15P	Nema 5-15P	Nema 5-15P
MAXIMUM AMP DRAW	9.1 amps	10.7 amps	14 amps	14.3 amps
AMPS RUN ON	9 amps	10.1 amps	13.8 amps	13.6 amps
WATTS	1035	1162	1587	1570
HERTZ	50/60	50/60	50/60	50/60
POWER INPUT OF HEATING UNIT	110-120 VAC	110-120 VAC	110-120 VAC	110-120 VAC

CAMTHERM COLORS:

Granite Gray (191)

Granite Green (192)

Granite Sand (194)

CODE*	UNIT DIMENSIONS W x D x H	UNIT WEIGHT	CASE LBS. (CUBE). CASE KG (CUBE M³)
LOW UNITS, SINGLE DOOR			
CMBH1826LF	30½" x 42" x 42⅜"	164 LB.	189 (32.85)
(Hot Only)	77,5 x 106,7 x 107,6 cm	75 KG	86 (1,22)
CMBHC1826LF	30½" x 42" x 42⅜"	164 LB.	189 (32.85)
(Hot/Cold)	77,5 x 106,7 x 107,6 cm	75 KG	86 (1,22)
TALL UNITS, DOUBLE DOOR			
CMBH1826TBF	30½" x 39" x 64⅜"	249.64 LB.	297 (47.5)
(Hot Only)	77,5 x 99,1 x 163,5 cm	114 KG	134,7 (1,76)
CMBHC1826TBF	30½" x 39" x 64⅜"	325.5 LB.	354.5 (47.5)
(Hot/Cold)	77,5 x 99,1 x 163,5 cm	148 KG	161 (1,76)

Case Pack: 1

* Codes above include Fahrenheit thermometer. For a Celsius thermometer, delete "F" and add "C" in codes.

LOW UNITS ONLY   TALL UNITS ONLY

Tall units conform to UL STD 197 & 471; ANSI/NSF STD 4

TRAYS

Cambro® offers the most extensive selection of trays in the world. Cambro trays will withstand the test of time, ideal for military cafeterias.

Camtrays®

Designed to outlast just about everything and everyone, Camtrays are guaranteed against cracking, warping or breakage for five years and are stain, odor and scratch resistant. Made of lightweight, high-impact fiberglass construction with reinforced edges, Camtrays will perform in the most demanding environments and last for decades. Camtrays can be personalized with digital quality images featuring your logo or design. Five year guarantee against breakage.

Compartment Trays

Created for cafeteria-style feeding, compartment trays have configurations designed to meet all menu requirements. This tray has a textured surface to withstand scratches and prolong service and is made of durable polycarbonate.

TRAY	CODE	DIMENSIONS
Camtray	1418	14" x 18" 35,6 x 45,7 cm
Compartment	10146CW	10" x 14½" 25,4 x 36,8 cm
Compartment	14105CW	10¹¹⁄₁₆" x 13⅞" 27,2 x 35,2 cm

Refer to the Cambro catalog or Color View Tray brochure for colors and the complete tray product line.

NSF®

Personalization available.

FOOD BOXES

Extend freshness and store securely in Cambro food boxes made with virtually unbreakable Camwear® polycarbonate. These food boxes hold up in the kitchen as well as in the field. Snap tight covers or SlidingLids™ won't come off during transport.

CODE	DIMENSIONS	CAPACITY	CASE PACK	CASE LBS. (CUBE) CASE KG (CUBE M3)
Boxes				
182615CW	18" x 26" x 15" 46 x 66 x 38 cm	22.0 gal. 83,3 L	3	35.5 (6.75) 16 (0,19)
182612CW	18" x 26" x 12" 46 x 66 x 30 cm	17.0 gal. 64,4 L	4	34.4 (5.56) 15,6 (0,157)
18269CW	18" x 26" x 9" 46 x 66 x 23 cm	13.0 gal. 49,2 L	4	31.75 (4.61) 14 (0,13)
18266CW	18" x 26" x 6" 46 x 66 x 15 cm	8.75 gal. 33,1 L	6	30.05 (4.61) 16,5 (0,13)
12189CW	12" x 18" x 9" 30,5 x 46 x 23 cm	4.75 gal. 18 L	6	20.45 (2.70) 11 (0,08)
12186CW	12" x 18" x 6" 30,5 x 46 x 15 cm	3.0 gal. 11,4 L	6	16.02 (2.13) 8 (0,06)

Color: Clear (135).

CODE	DESCRIPTION FITS BOX	CASE LBS. (CUBE) CASE KG (CUBE M³)
Covers		
1826CCW	Flat Lid 18" x 26" / 45,7 x 66 cm	16.01 (0.92) / 8 (0,03)
1826SCCW	SlidingLid™ 18" x 26" / 45,7 x 66 cm	19.03 (1.72) / 8,9 (0,050)
1218CCW	Flat Cover 12" x 18" / 30,5 x 45,7 cm	7.88 (0.49) / 4 (0,013)
1218SCCW	SlidingLid™ 12" x 18" / 30,5 x 45,7 cm	9.5 (0.72) / 4,3 (0,020)

Case Pack: 6 **Color:** Clear (135).

StoreSafe NSF.

ALLERGEN MANAGEMENT

Booth food allergies and foodborne contamination can lead to serious, and in some cases, life-threatening illness. Take safety precautions by incorporating Allergen Management through personalization and color coding. Ensure easy identification of ingredients free of the "Dangerous Eight" and other allergens.

The Dangerous Eight Include

Tree Nuts	Peanuts	Shellfish	Fin Fish
Milk	Eggs	Wheat	Soy

Storage Containers and Seal Covers

Use storage containers that are labeled Allergen-Free and have purple graduations, with a purple Seal Cover* to easily identify ingredients free of allergens.

*Lids sold separately.

CODE	STORAGE CONTAINER CAPACITY	CASE PACK
2SFSCW	2 qt.	6
4SFSCW	4 qt.	6
6SFSCW	6 qt.	6
8SFSCW	8 qt.	6
12SFSCW	12 qt.	6
18SFSCW	18 qt.	6
22SFSCW	22 qt.	6

Color: Allergen-Free Purple (441).

CODE	DESCRIPTION	CASE PACK
SFC2SCPP	Lid Fits 2 & 4 qt.	6
SFC6SCPP	Lid Fits 6 & 8 qt.	6
SFC12SCPP	Lid Fits 12, 18 & 22 qt.	6

Color: Allergen-Free Purple (441).

Measuring Cups

Use measuring cups that are labeled Allergen-Free and have purple graduations, to reduce the risk of cross-contamination and accidental exposure to allergens during the preparation process.

CODE	MEASURING CUP CAPACITY	CASE PACK
25MCCW	1 Cup (dry measure)	12
50MCCW	1 pt.	12
100MCCW	1 qt.	12
200MCCW	2 qt.	12
400MCCW	4 qt.	1

Color: Allergen-Free Purple (441).

Allergen-Free Dissolvable StoreSafe® Labels:

Use allergen-free 100% dissolvable and biodegradable labels to identify ingredients and foods that are free of specified allergens.

Allergen-Free

☐ No Dairy   ☐ No Peanuts   ☐ Gluten-Free
☐ No Eggs   ☐ No Shellfish ☐ Other
☐ No Soy   ☐ No Fish
☐ No Tree Nuts ☐ No Wheat

CAMBRO   StoreSafe

CODE	DESCRIPTION
23SLB250AF	StoreSafe® Allergen-Free Dissolvable Labels (24 rolls, 250 labels per roll)

Label Color: White and Allergen-Free Purple.

Cafeteria Trays

Flag allergen-free meal orders with StoreSafe Allergen-Free labels that indicate both their name and what each tray is free of (for instance "gluten-free", "no dairy", and "no peanuts").

Ingredient Bins

Store bulk allergen-free ingredients, such as rice flour and potato starch, in personalized ingredient bins to prevent cross-contamination and provide quick at-a-glance identification.

OTHER CAMBRO PRODUCTS THAT CAN BE PERSONALIZED WITH THE ALLERGEN- FREE LOGO: SELECT SERVING UTENSILS, STORAGE CONTAINERS (FOOD PANS/BOXES), CAMLITERS®, DISPLAY COVERS, CROCKS AND TUMBLERS.

StoreSafe Food Rotation Labels

Identify ingredients and "use-by dates" with 100% dissolvable and biodegradable labels. Label and adhesive dissolve in less than 30 seconds under running water or when cleaned through a dishwasher. Labels leave behind no sticky residue. Label also withstands temperatures -40° F to 200° F (-40° C to 93° C) and are microwaveable safe.

CODE	LABEL SIZE	CASE PACK	CASE LBS. (CUBE) CASE KG (CUBE M3)
23SLB250	2" x 3" 5 x 7,6 cm	24 Rolls 250 labels/roll	9.8 (0.46) 4.5 (0,02)

CAMBRO   StoreSafe

Item:
Prepared Date:
Use By: _____ Emp:
M   T   W   TH   F   SA   SU
Made in USA

CAMSHELVING®

Easy and Quick to Clean

- Smooth surface is easy to wipe clean.
- Shelf plates can be dishwasher.
- Shelf plates have Camguard®, a built in anti-microbial that will not scrape off, wash off or wear away. Camguard inhibits the growth of mold, fungus, bacteria and bacterial odors continuously between cleanings.

camguard®

Strong and Durable

- Posts and Traverses, the weight bearing components, are made with a steel core and are encapsulated by a thick polypropylene outer layer.

Easy to Assemble, Adjust and Configure

Align as shown.

- Building configuration to fit any size area.
- A complete unit can be assembled in minutes.
- Shelves can be adjusted without disassembling the rest of the unit.

Rust Free

- Camshelving is weldless with no exposed metal, so it remains rust free.
- Can be used in walk-in refrigerators or freezers, or any wet or humid environment.

NSF COMPONENTS

Starter Unit   Add-on Unit

- Available in Mobile and Stationary Units.
- Weight bearing capacity varies from 400 to 1,000 lbs. per shelf depending on traverse length.
- Refer to the Cambro catalog for a complete listing of Camshelving units and kits.

CAMSHELVING HIGH DENSITY STORAGE SYSTEM

Maximize storage capacity by eliminating aisles and utilizing all available space. Ideal for operations with limited space or that need to use their space more efficiently. Floor track system provides safe and easy access to stored product. Heavy weight loads roll securely on raised floor track. No drilling into the floor.

Track simply connects to the bottom of the Stationary Camshelving Unit.

Grooved casters roll easily and securely on track.

NSF COMPONENTS

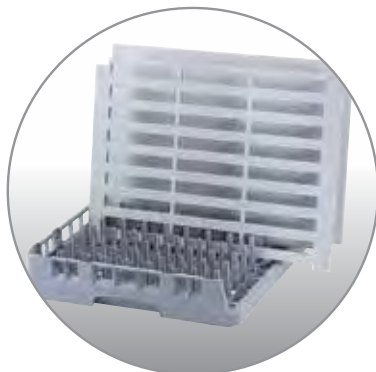**INCREASES STORAGE CAPACITY UP TO 40%**

CAMSHELVING® ELEMENTS SERIES

STRONG TECHNOLOGY

- Composite material is as strong as steel.
- 60% lighter in weight than steel; easy to set up, adjust and change configurations.

HYGIENIC DESIGN

- Shelf plates are easily removed for thorough dishwasher cleaning.
- Camguard® Antimicrobial is embedded in shelf plates to suppress the growth of mildew and bacterial odors between cleanings. Camguard will not scrape off, wash off or wear away.

SHELVING FOR LIFE

- Lifetime warranty against corrosion and rust.
- Withstands temperatures -36˚F (-38˚C) to 190˚F (88˚C).
- Ideal for wet, dry, cold or hot environments.

NSF COMPONENTS

- **Available in Mobile and Stationary Units.**
- **Weight bearing capacity varies from 400 to 1,000 lbs. per shelf depending on traverse length.**
- **Refer to the Cambro catalog for a complete listing of Camshelving units and kits.**

FLEX SNACK STATION

Customizable solution for serving grab-n-go meals, breakfast-to-go, and more. Within minutes, configure, assemble and adjust the cart to fit your needs with shatterproof clear boxes with matching SlidingLid covers. Clear boxes and lids provide perfect content visibility and prolongs product freshness. Use Camchillers to extend cold temperatures for hours without the use of messy ice. The Flex Snack Station is easy to maneuver through hall ways for operators of all heights.

MODEL	CAMSHELVING MOBILE UNIT
Dimensions	36" L x 24" D x 67" H
Mobile Post Kits	2 x CSPRK2467
Angled Divider Bars	4 pack x CSDBA (16 total/unit)
Traverse	4 sets x CSTR36
Casters	2 sets x CSCTL- 5" (premium w. lock)
Clear Food Boxes	12 x 12186CW
Sliding Lids	12 x 1218SCCW
Compact Camchillers	8 x CP814 (8" x 14")

MODEL	CAMSHELVING ELEMENTS MOBILE UNIT
Dimensions	36" L x 24" D x 70" H
Mobile Post Kits	2 sets x EMPK2470
Angled Divider Bars	4 pack x EDBA (16 total/unit)
Traverse	4 sets x EMTR36 mobile traverse
Mobile Dove Tail	1 set x EMTD32
Casters	2 sets x EMSCBP (premium w/lock)
Clear Food Boxes	12 x 12186CW
Sliding Lids	12 x 1218SCCW
Compact Camchillers	8 x CP814 (8" x 14")

CAMSHELVING® FULL-WRAP SECURITY CAGE

NSF®
COMPONENTS
Camshelving only

This heavy duty security cage provides safe storage from loss of pilferage for valuables such as steaks, vegetables, and spirits. It's also ideal for securely storing high volume items that can "walk away" such as bottled water and sodas.

Shown with optional intermediate shelf.

- Ideal for securing items on an entire shelving unit, maintains stored items visible at all times, making it easy to check inventory.
- The cage is designed with joining panels and can be installed in a new or existing Camshelving Stationary or Mobile unit.
- Security cage is designed for use with a padlock or combination lock.

CSSUM244867PKG

CODE	DESCRIPTION	DIMENSIONS L x W x H
CSSUM244867PKG	Camshelving Full-Wrap Mobile Security Cage	50¼" x 26¾" x 67¾" (127,6 x 70 x 172,1 mm)
CSSU244864PKG	Camshelving Full-Wrap Stationary Security Cage	50¼" x 26¾" x 64½" (127,6 x 70 x 163,8 mm)
CSSU2448	Full-wrap Security Unit Only	50¼" x 26¾" x 61½" (127,6 x 70 x 156,2 mm)

Case Pack: 1   **Color:** Speckled Gray (480).

CAMSHELVING® DRYING RACK SYSTEM

StoreSafe

NSF®
COMPONENTS

- 7-Slot Rack securely holds trays, cutting boards, lids, baking sheet pans (full and half size) and plates 8" to 13.5" (203 to 343 mm) diameter during drying process.
- Provides convenient, sanitary storage, maximizes holding space and easy access.
- Allows sufficient air circulation [Maximum product width $1\frac{5}{16}$" (33 mm)].
- Fits all 24" (610 mm) wide Camshelving, Mobile or Stationary units.

Drying Rack Mobile Units

CODE	DIMENSIONS L x W x H
Camshelving® Drying Rack Mobile Units	
CSDRC244875PKG	48" x 24" x 75" (1220 x 610 x 1910 mm)
CSDRC246075PKG	60" x 24" x 75" (1530 x 610 x 1910 mm)
Camshelving® Elements Drying Rack Mobile Units	
EDRC244878PKG	48" x 24" x 78" (1220 x 610 x 1980 mm)
EDRC246078PKG	60" x 24" x 78" (1530 x 610 x 1980 mm)

Camshelving® Drying Rack Mobile Unit Color: Speckled Gray (480).
Camshelving® Elements Rack Mobile Unit Color: Brushed Graphite (580).
Package Includes: Drying Racks for three levels, six mobile traverses, two mobile post kits, premium casters (2 swivel, no brake, 2 swivel with brake) and instruction manual.

CSDR7
Tray Drying Rack

Drying Racks

CODE	DIMENSIONS L x W x H	CASE PACK
CSDR7	23½" x 10¼" x 3¾" (596,9 x 260,4 x 95,3 mm)	1
CSDR73	23½" x 10¼" x 3¾" (596,9 x 260,4 x 95,3 mm)	3

Color: Soft Gray (151).   Shelf Plates not Included.

DUNNAGE RACKS

StoreSafe **NSF®**

Keep food 12" (30,5 cm) safely off of the floor with heavy-duty polypropylene dunnage racks. For use in cold or dry storage, these dunnage racks will never rust, corrode or bend and are easy to clean.

CODE	EXTERIOR DIM. H x D x W CM	LOAD CAPACITY	CASE LBS. (CUBE)/ CASE KG (CUBE M³)
SLOTTED TOP			
DRS300	12" x 21" x 30" 30,5 x 53,3 x 76,2	1500 LB. 680 KG	21.9 (4.76) 10 (0,18)
DRS360	12" x 21" x 36" 30,5 x 53,3 x 91,5	1500 LB. 680 KG	25.3 (5.63) 11,5 (0,21)
DRS480	12" x 21" x 48" 30,5 x 53,3 x 121,9	3000 LB. 1,360 KG	34 (7.53) 15,4 (0,28)
DRS600	12" x 21" x 60" 30,5 x 53,3 x 152,4	3000 LB. 1,360 KG	40.7 (9.5) 18,5 (0,35)

Case Pack: 1   **Colors:** Dark Brown (131), Speckled Gray (480).

Versa Food Service System

The Versa Food Service System provides custom design without the custom price. This non-electric completely portable system goes anywhere and keeps food cold for hours with either ColdFest® pans or Buffet Camchillers®. Whether it's space considerations, frequent menu changes or merchandising requirements, the Versa Food Service System offers unequalled versatility.

- All components are fully compliant with NSF requirements.
- All-weather material is durable and easy to clean.
- One person can set-up or knock-down the sneeze guards and tray rails for transport or storage in only 30 seconds.

- Ergonomic, molded-in handles on both sides ensure easy maneuvering.
- Versa Food Bar Ultra Series is now available with two secure storage cabinets that can hold up to 50 lbs. (22 kg) per compartment of non-perishable items.

VBRHD6

VBRHD5

VCSWRHD

Buffet Camchillers®

Extend safe, cold holding time without ice. Dual-sided Buffet Camchillers hold 2½" (6,4 cm) and 4" (10,2 cm) pans.

CPB1220

VBRUTHD6

VCSWRHD

Versa Work Table *Ultra Series*

This multipurpose Work Table is perfect as a prep table, self-serve station, or as shown connected to a Versa Cart for a portable Grab-n-Go station. Now available with two secure storage cabinets that can hold up to 50 lbs. (22 kg) per compartment of non-perishable items.