

BARA-KADE® STANDARD

Construction
Bentonite

BARA-KADE STANDARD is a fine powdered, high quality Wyoming sodium bentonite designed as a sealant for ponds, lakes, reservoirs, and other stationary waters. BARA-KADE STANDARD's powdered consistency allows for easy homogenous blending into soils and other backfill materials. It exhibits extremely low permeability and has a high swelling capacity.

	Specifications
Moisture, %	12.0 Max
Bulk Density (compacted), lbs/ft ³	72
Specific Gravity	2.7
Dry screen, % minus 200 mesh	67.5 Max

Directions for Use

Depending on the soil type, typical usage rates can be between 2 and 5 lbs/ft².

Packaging


BARA-KADE STANDARD is sold in 50 lbs. and bulk bags and can ship from our Lovell and Colony, WY plants.

Applications/Functions

- Sealant for ponds and water bodies
- Wastewater liners
- Hydraulic barriers
- Geo-construction sealing

Advantages

- NSF/ANSI/CAN Standard 60 certified
- Easy to create homogenous blends
- Low permeability, high swelling

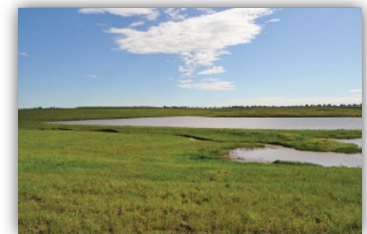

Bentonite Performance Minerals LLC

A Halliburton Company

3000 N. Sam Houston Pkwy E. Houston, TX 77032-3219

Phone: 281.871.7900

Email: BPMSales@halliburton.com

www.bentonite.com

Sales of BPM products and services will be in accord solely with the terms and conditions contained in the contract with BPM, its affiliates, and/or authorized distributors that is applicable to the sale. ©2021 Bentonite Performance Minerals LLC. All Rights Reserved. BARA-KADE® is a registered trademark of Halliburton. Rev. 10/2021

