



POSEIDON G2 : LED LINEAR FIXTURE

DESCRIPTION

The Xeleum Poseidon G2 is a high efficiency Outdoor/Indoor 4-foot linear LED Parking Garage fixture designed specifically for applications where moisture or dust is an issue. Ideally suited for use in locations such as tunnels, canopies, building entrances and food facilities. Featuring Xeleum Xi-Fi® technology.

FEATURES

- Architecturally attractive and modern design
- Modern white design with clean lines
- Lower operating costs with built-in Xi-Fi® Wireless Lighting Control System
- Impact resistant PC lens

LISTINGS

- UL Listed for wet locations
- IP65 Rated
- Complies with IESNA requirements
- ROHS Compliant

SPECIFICATIONS

	40W	75W
Voltage	120 - 277 VAC	
Typical Lumens	6,292	10,292
Efficacy (Lp/W)	128	137
Surge Protection	5 KA	
CRI	>82	
CCT	4,080	4,105
Dimming	0-10V (dim to off with Xi-Fi®)	
Rated Life (L70)	>50,000 Hours	
Working Temp.	-40° F to +130° F	
Storage Temp.	-40° F to +150° F	

WARRANTY

- 10 year limited warranty

project name	type
catalog number	
comments	voltage
approved by	date



APPLICATIONS

- Garages
- Tunnels
- Canopy Areas
- Covered Roadways
- Entrances to Buildings
- Linear Surface or Ceiling Mount



ORDERING INFORMATION:

EXAMPLE: XLPG48-4040UY65SM


Product Code	Style	Length	Watts	CCT	Voltage	Dimmable	IP Rating	Mounting
XL - Poseidon G2	PG - Parking Garage	48	40W	30K - 3000K	U - 100 - 277V	Y = Yes	65	SM - Surface Mount CM - Conduit Mount
				35K - 3500K				
			75W	40K - 4000K				
				75K - 4000K				

PERFORMANCE SUMMARY

Part Number	Length	Wattage	Color Temp	Power	Dimming	IP Rating	Mounting
XLPG48-4040UY65SM	48	40W	4000 K	120-277	Yes 0-10V	IP65 Wet Locations	Surface Mount with Brackets
XLPG48-4040UY65CM							Conduit Mount Box
XLPG48-4050UY65SM			5000 K				Surface Mount with Brackets
XLPG48-4050UY65CM							Conduit Mount Box
XLPG48-7540UY65SM		75W	4000 K				Surface Mount with Brackets
XLPG48-7540UY65CM							Conduit Mount Box
XLPG48-7550UY65SM			5000 K				Surface Mount with Brackets
XLPG48-7550UY65CM							Conduit Mount Box

DIMENSIONS

	Fixture	Packaged Fixture
Length	47 1/4"	51"
Width	6 1/2"	10"
Height	3 3/4"	6 1/2"
Weight	11.3 LBS.	14.1 LBS.

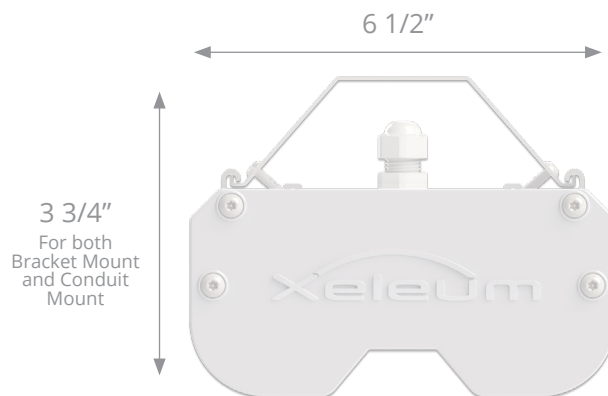

INSTALLATION OPTIONS

Ceiling Mount



Conduit Mount

