

Polarshine® MARINE HEAVY CUT COMPOUND


Technical data sheet

Product information

Water borne, silicone-free polishing compound designed to quickly and permanently remove heavy oxidation, deep scratches and sanding scratches from grit 800 and finer, leaving a high-gloss finish.

Product advantages

- · Removes scratches from grit 800 and finer quickly and permanently
- · Removes heavy oxidation and restores colour and shine
- · Water borne and silicone-free

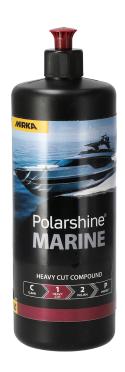

Compounding	Polish	Finish	Sealing
		′	

Surfaces

- · Gelcoat
- · High gloss lacquers
- · Vinyl ester and Epoxy
- · High gloss polyester paints

Polishing pad

- · Twisted wool
- Lambswool

Polishing machine

Rotary polisher 1000 – 1500 rpm

Product properties

Speed:
Polish, gloss:

Work instruction

- 1. Shake or stir the polishing compound before use.
- 2. Do not use too much compound. Use a small amount on a focused area at a time = less mess and saves time cleaning!
- 3. Clean thoroughly before and after polishing.
- 4. Work focused on an area of 40x40 cm at a time.
- 5. Polish until a scratch free surface is achieved.
- 6. Wipe the surface with a microfiber cloth after application.
- 7. Keep the pad clean, a dirty pad causes deep swirls and scratches.

Technical specifications

Density: ca 1.23 g/ml Viscosity: ca 37 000 cP Colour: White

pH:

2.5-4.5

Storage recommendations

Recommended storage temperature: 5° - 35° C / 41° - 95° F

Keep from freezing