# ISLAND STONE



# PATINA GLASS COLLECTION

### **COLORS AVAILABLE** IN THIS PATTERN



Akoya Pearl 3.5"x 12" - pgr3akoyG



Bright Side 3.5"x 12" - pgr3brigG



Champagne 3.5"x 12" - pgr3chamG




Evening Onyx 3.5"x 12" - pgr3evenG



Silver Lining 3.5"x 12" - pgr3silvG

PATTERN: 3.5"x12" STYLE:


FIELD TILE



This product comes as individual pieces. All dimensions are nominal. One Tile = .30 sq. ft.



# ISLAND STONE

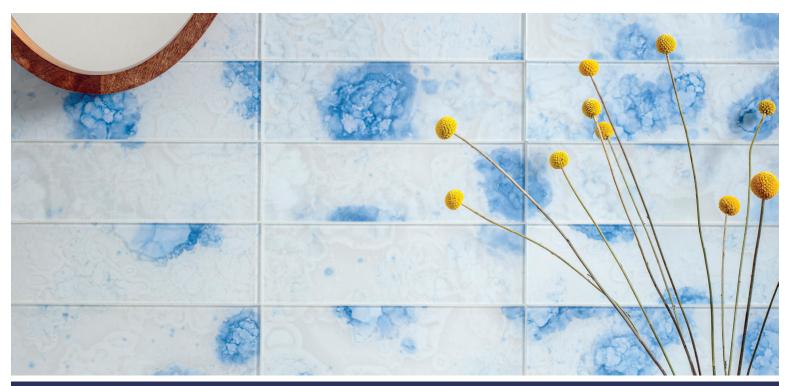

## PATINA GLASS COLLECTION

#### Brand: Island Stone

Material Type: Glass

Styles in Collection: Field Tile

**Colors in Collection:** Akoya Pearl, Bright Side, Champagne, Evening Onyx, Silver Lining

Finish: Gloss

### PATTERN: 3.5"x 12"

Actual Dimensions: 3.62" x 11.81" x .16" 92 x 300 x 4 mm

Area Covered: .30 sq. ft. per piece Weight: 36 lbs. per box Pieces per box: 60

## **Talking Points**

- Patina Glass is a low temperature coated glass tile with a double layered back paint. Unlike most mirror backed glass tile, Patina Glass can be successfully installed in intermittent wet locations such as tub or shower walls including steam shower walls.
- Each piece of Patina Glass is unique. In an effort to achieve a balanced and visually consistent installation the entire Patina Glass order should be blended either prior to or during installation.
- The minimum grout joint requirement for Patina Glass is 1/16". Patina Glass should never be installed without a grout joint.
- Patina Glass tile can be easily cut with either a score and snap tool or wet saw with a continuous rim diamond blade made for cutting glass tile. Do not dry cut Patina Glass with a power tool.
- Patina Glass should be cleaned with a pH neutral tile cleaner or an alkaline based tile cleaner. Harsh abrasive or acidic cleaners should be avoided.

#### **Recommended Usage**



#### Confirm complete product specifications at IslandStone.com.

All tile and natural stone products may vary slightly in color, shade, finish and size. Upon delivery, inspect the entire tile order prior to commencing tile work. Installation constitutes acceptance. No claims will be accepted after installation. Grout color selection may have an impact on the appearance of the tile.